


Makita[®]

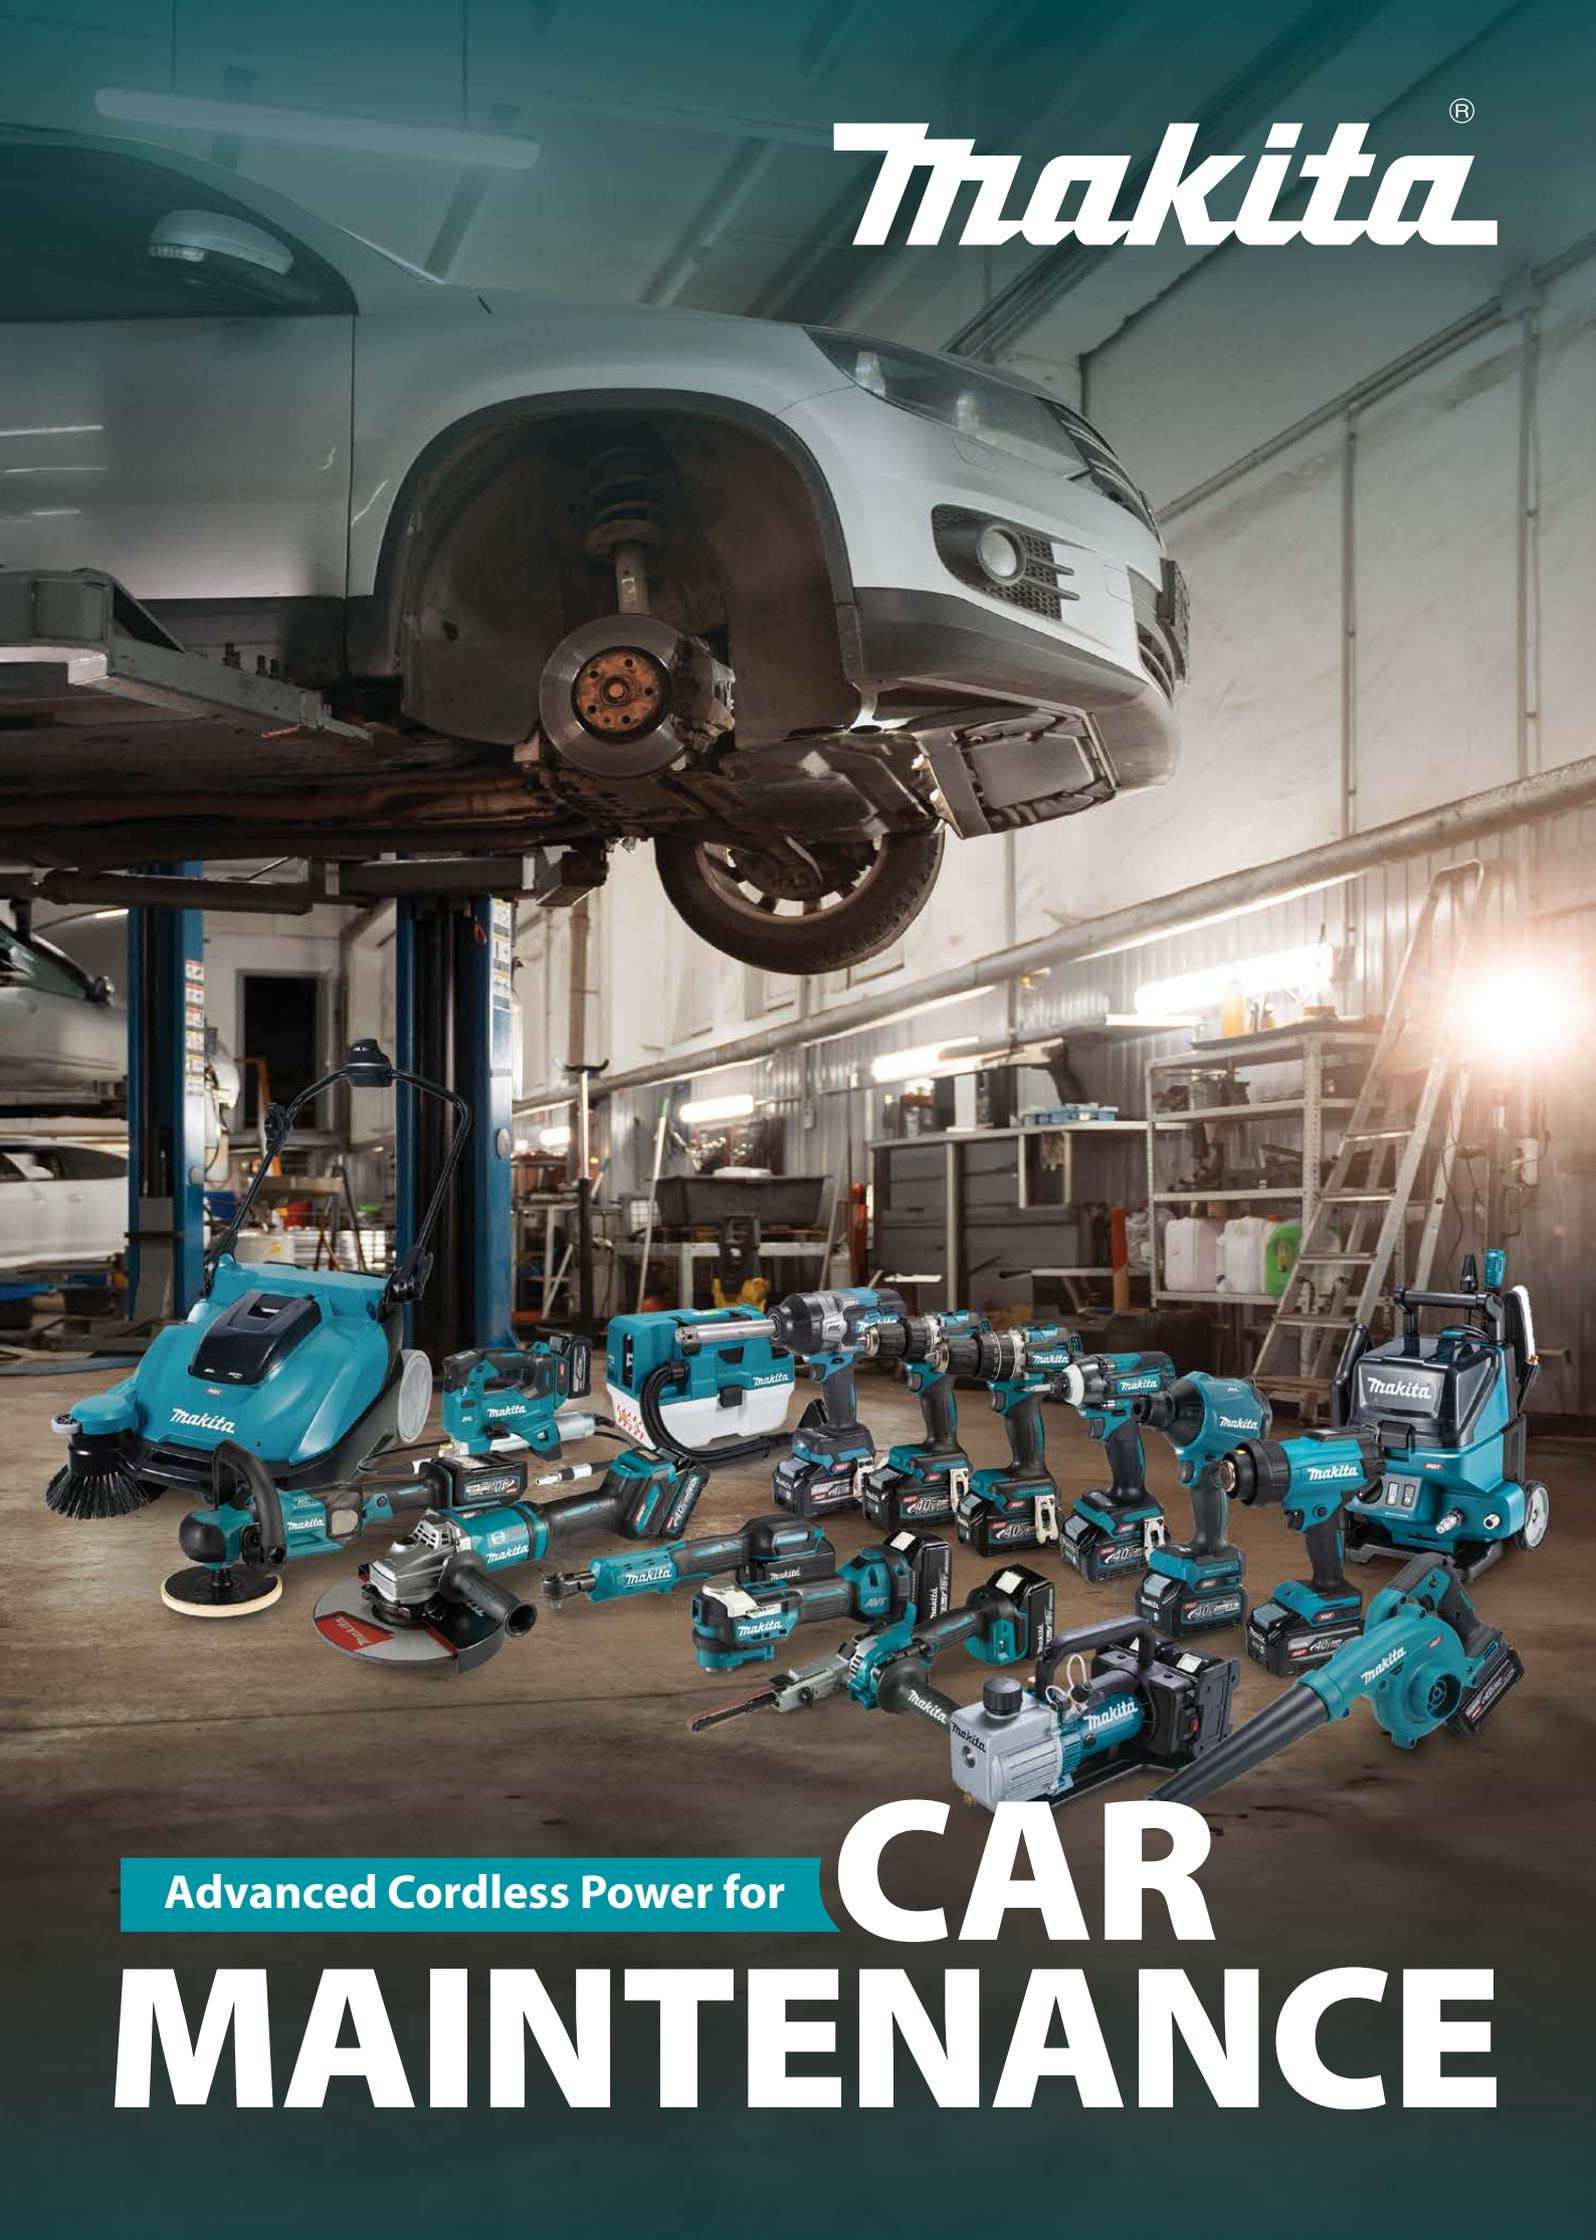

Advanced Cordless Power for **CAR**
MAINTENANCE

PRODUCT CATEGORIES

FOR CAR REPAIR



Light pg.21



Inflator pg.15



Heat gun pg.16



Caulking gun pg.16



Dust blower pg.17

1. LIGHTING

2. TYRES

3. WINDOW / GLASS



6. BASIC NEEDS

7. AIR SYSTEM & FILTERS

8. POLISH / BODY WASH



Impact Wrench pg.6



Impact driver pg.7



Vacuum pump pg.17



Blower pg.18



Pressure washer pg.20



Hammer Driver drill pg.9



Angle grinder pg.10



Dust blower pg.17



Sander polisher pg.15



Polisher pg.16



Impact driver pg.7



Angle impact driver pg.8



Ratchet wrench pg.8



Driver drill pg.9



Multi tool pg.11



Die grinder pg.13



Multi tool pg.11



Compact cut off pg.12



Belt sander pg.15



Random orbit sander pg.14



Belt sander pg.15

4. NARROW SPACE SOLUTIONS

5. RUST / COLOUR



9. COLD CUTS / BODY

10. MECHANICALS PARTS

11. CLEANING



Multi tool pg.11



Recipro saw pg.11



Band saw pg.11



Die grinder pg.13



Vacuum sweeper pg.19



Jig saw pg.11



Compact cut off pg.12



Rivet gun pg.12



Grease Gun pg.13



Vacuum cleaner pg.19

Safety Precautions

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

/// KEEP WORK AREA CLEAN.

Cluttered areas and benches invite injuries.

/// CONSIDER WORK AREA ENVIRONMENT.

Don't use power tools in damp or wet locations. Keep work area well lit. Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

/// KEEP CHILDREN AWAY.

All visitors should be kept away from work area. Don't let visitors touch the tool or extension cord.

/// STORE IDLE TOOLS.

When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

/// DON'T FORCE THE TOOL.

It will do the job better and safer at the rate for which it was intended.

/// USE THE RIGHT TOOL.

Don't force small tools or attachments to do the job of a heavy-duty tool. Don't use tools for purposes not intended.

/// DRESS PROPERLY.

Don't wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

/// USE SAFETY GLASSES.

Also use face or dust mask if the cutting operation is dusty.

/// DON'T ABUSE THE CORD.

Never carry the tool by the cord or yank it to disconnect it from the socket. Keep the cord away from heat, oil, and sharp edges.

/// SECURE WORK.

Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

/// DON'T OVERREACH.

Keep proper footing and balance at all times.

/// MAINTAIN TOOLS WITH CARE.

Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

/// DISCONNECT TOOLS.

When not in use, before servicing and when changing accessories such as blades, bits and cutters.

/// REMOVE ADJUSTING KEYS AND WRENCHES.

Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

/// AVOID UNINTENTIONAL STARTING.

Don't carry a plugged-in tool with a finger on the switch. Ensure switch is OFF when plugging in.

/// USE OUTDOOR EXTENSION CORDS.

When tool is used outdoors, use only extension cords intended for outdoor use.

/// STAY ALERT.

Watch what you are doing. Use common sense. Don't operate tool when you are tired.

/// CHECK DAMAGED PARTS.

Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

/// GUARD AGAINST ELECTRIC SHOCK.

Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

/// REPLACEMENT PARTS.

When servicing a tool, use only identical replacement parts.

/// VOLTAGE WARNING:

Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.

Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Net weight and dimensions may differ by the type of battery.
- Standard export color for motor housing is Makita industrial green (blue).
- Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ 2003.

Warranty

Every **MAKITA** tool is thoroughly inspected and tested before leaving the factory. Subject to the following Terms and Conditions from the date of purchase, this tool is **warranty against defective materials and manufacturing defects for a period of 6 MONTHS for AC and non brushless DC tools. As for brushless DC tools it will be a period of 12 MONTHS. Same goes to Makita charger warranty, against defective materials and manufacturing defects for a period of 12 MONTHS. As for Makita Light will be a period of 6 MONTHS.**

The period and conditions of our warranty as follows:

1. Sales receipt must be presented when servicing or warranty is required.
2. Warranty ONLY cover tools distributed by Makita Singapore Pte. Ltd. Warranty does not cover tools purchased overseas or distributed by other countries.
3. **This warranty is valid base on the original purchase receipt with "Date of Purchase", "Model Number" & "Serial Number".**

This warranty will be null & void in any of the following events during the warranty period:

1. The product unit has undergone repair, attempted repair, dismantle or modification in any way whatsoever by any other person.
2. Damage resulting from use of improper accessories, non-genuine replacement parts, disassembly, tampering, alternation and repairing in any way that affects the reliability and performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or usage of generator, wrong usage not in accordance with the Operation Manual.
5. If the Serial Number on the tool, seal on the battery and charger has been defaced or removed.
6. If any information on the warranty card has been defaced, removed, altered, unreadable or unclear (date of purchase, Serial Number, etc.)

** Makita reserved the rights of amend conditions of warranty without prior notice.

Please visit our website for Makita's Service Centre information

<http://www.makita.com.sg/servicing-the-customer>

Li-ion Battery & Charger Time Reference, Compatibility Chart

40Vmax		18V		Fast Charging DC40RA (191E08-6) DC40RB* (191N14-5)		DC40RC (191M92-9)		Fast Charging DC40RA (191C11-5) + ADP10 (191C11-5) + Compatible with LXT Li-Ion batteries		Fast Charging DC40RC (191C11-5) + ADP10 (191C11-5) + Compatible with LXT Li-Ion batteries		Fast Charging DC18RC (195586-8) 110V - (195582-6) DC18RD* (196934-4) DC18RE** (198446-3)		DC18SD (194534-4) DC18SH* DC18SE (Automotive) (194621-9)		BCC01 With dedicated charger DC4002		BCC02 With dedicated charger DC4002		BCC01 With dedicated charger DC4002 + ADP10 (191C11-5)	
40Vmax Lithium-ion XGT	8.0Ah BL4080F (191X65-8) BL4080H (1916T7-4)	76 min.	170 min.	-	-	-	-	-	-	-	-	-	280 min.	560 min.	-	-	-	-	-	-	
	5.0Ah BL4050F (191L47-8)	50 min.	85 min.	-	-	-	-	-	-	-	-	-	175 min.	350 min.	-	-	-	-	-	-	
	4.0Ah BL4040F (1910N6-8) BL4040 (191B26-6)	45 min.	67 min.	-	-	-	-	-	-	-	-	-	145 min.	290 min.	145 min.	435 min.	-	-	-	-	
	2.5Ah BL4025 (191B36-3)	28 min.	38 min.	-	-	-	-	-	-	-	-	-	90 min.	180 min.	90 min.	270 min.	-	-	-	-	
	2.0Ah BL4020 (191L29-0)	22 min.	30 min.	-	-	-	-	-	-	-	-	-	75 min.	150 min.	75 min.	225 min.	-	-	-	-	
18V Lithium-ion LXT	12.0Ah BL18120 (1915J2-8)	-	-	70 min.	175 min.	120 min.	265 min.	-	-	-	-	-	-	-	-	-	330 min.	660 min.	-	-	
	9.0Ah BL1890 (1915H4-0)	-	-	59 min.	135 min.	85 min.	200 min.	-	-	-	-	-	-	-	-	-	250 min.	500 min.	-	-	
	6.0Ah BL1860B (197422-4)	-	-	40 min.	85 min.	55 min.	130 min.	-	-	-	-	-	-	-	-	-	160 min.	320 min.	-	-	
	5.0Ah BL1850B (197280-8)	-	-	35 min.	70 min.	45 min.	110 min.	-	-	-	-	-	-	-	-	-	135 min.	270 min.	-	-	
	3.0Ah BL1830B (197599-5)	-	-	22 min.	42 min.	22 min.	60 min.	-	-	-	-	-	-	-	-	-	80 min.	160 min.	-	-	
	2.0Ah BL1820B (197254-9)	-	-	24 min.	33 min.	24 min.	45 min.	-	-	-	-	-	-	-	-	-	55 min.	110 min.	-	-	
	1.5Ah BL1815N (196449-1)	-	-	15 min.	22 min.	15 min.	30 min.	-	-	-	-	-	-	-	-	-	40 min.	80 min.	-	-	

BL4040F TABLESS BATTERY

Achieves increased continuous output performance under heavy load, which is equivalent to BL4050F, while maintaining the same size as BL4040.

vs BL4040

 **36%**
MORE POWER

 **32%**
COOLER

vs BL4050F


 **28%**
LESS WEIGHT

 **32%**
MORE COMPACT



IMPACT WRENCH

- Standard Bolt Size
- High Strength Bolt Size

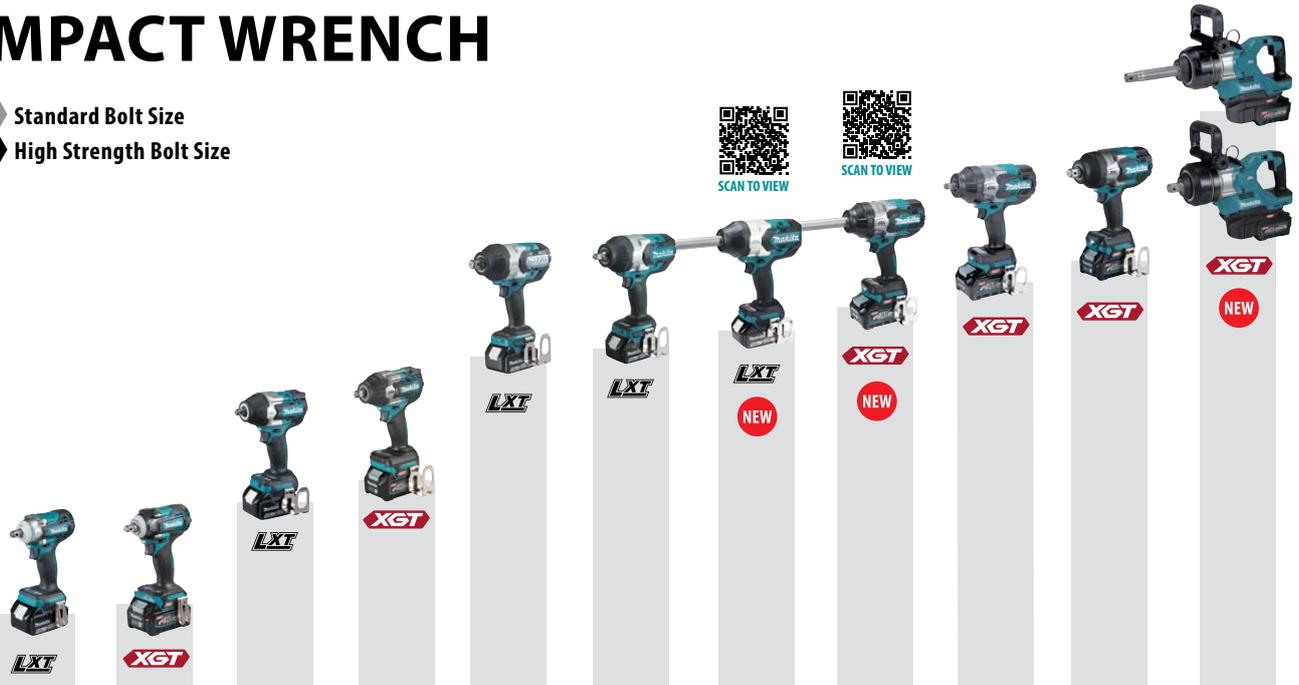

MAX. FASTENING TORQUE

Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm
330	350	700	760	1050	1200	1360	1500	1700	1800	3150	
DTW300	TW004G	DTW700	TW007G	DTW1001	DTW1002	DTW1005	TW011G	TW002G	TW001G	TW009G/TW010G	
12.7mm (1/2")	12.7mm (1/2")	12.7mm (1/2")	12.7mm (1/2")	19mm (3/4")	12.7mm (1/2")	12.7mm (1/2")	12.7mm (1/2")	12.7mm (1/2")	19mm (3/4")	25.4mm (1")	
● M10-20	● M10-20	● M10-24	● M10-24	● M12-30	● M12-30	● M12-33	● M12-36	● M12-36	● M12-36	● M27-45	
● M10-16	● M10-16	● M10-16	● M10-16	● M10-24	● M10-24	● M10-24	● M10-27	● M10-27	● M10-27	● M20-33	
⚙️ ↺	⚙️ ↺	⚙️ ↺	⚙️ ↺			⚙️ ↺	⚙️ ↺	⚙️ ↺	⚙️ ↺	⚙️ ↺	⚙️ ↺

⚙️ Reverse rotation auto stop

⚙️ Auto-stop system available both in forward/reverse rotation modes



	Forward	Reverse
mode 1	Stops immediately after impact is detected	Stops immediately after the bolt/ nut gets loosened
mode 2	Stops approximately 0.5 seconds after impact is detected	Stops approximately 0.2 seconds after the bolt/ nut gets loosened
mode 3	Stops approximately 1 second after impact is detected	Shift to 230 min-1 after the bolt/ nut gets loosened



ACCESSORIES FOR IMPACT WRENCH

Protective cover



413G39-0 - DTW701, TW007G



413G40-5 - DTW1001, DTW1002



413G38-2 - TW001G

IMPACT DRIVER



MAX. FASTENING TORQUE

Nm
140

DTD157



Nm
170

DTD153

Nm
175

DTD154



Nm
180

DTD173



Nm
210

TD003G




Nm
220

TD001G



Nm
220

TD002G



Nm
230

TD004G



Wood

Tightening long screws.
The tool drives a screw with low-speed rotation at first. After starting to impact, the rotation speed increases and reaches max speed.



Bolt

Loosening bolts.
This mode helps to prevent a bolt from falling off.



Auto-Stop

Auto-stop system available both in forward/reverse rotation modes



T1

Teks screw thin metal
Driving self-drilling screws to a thin metal like a metal stud. The tool stops rotating soon after impact starts.



T2

Teks screw thick metal
Driving self-drilling screws to a thick metal plate with good finish. This mode helps to prevent the screws from breakage and stripping.



Assist modes

Feature helps eliminate "screw cam-out" and "cross threading" by driving at low speed until tightening begins



ACCESSORIES FOR IMPACT DRIVER



Magnetic bit holder for screwdriver

784811-8 - 60 mm
784801-1 - 76 mm



Torsion screw bit C-form Impact PREMIER with bit holder Assortment
E-03567 - 25mm bits: PH1, PH2, PH3, PZ1, PZ2, PZ3, TX15, TX20, TX25, TX30 and 50mm bit holder



Screw bit for screwdriver (E-form)

A-45850 - 122 mm (5pcs)
A-16536 - 132 mm (5pcs)
B-10481 - 162 mm (5pcs)
B-10475 - 182 mm (5pcs)



Screw bit blister (C-form)

B-23466 - 25 mm (3pcs)



Screw bit blister (E-form)

D-74930 - 50 mm (3pcs)
D-74946 - 50 mm (3pcs)
D-74952 - 50 mm (3pcs)
D-74968 - 50 mm (3pcs)
D-74974 - 90 mm (1pcs)
D-74980 - 90 mm (1pcs)
D-74996 - 90 mm (1pcs)
D-75007 - 90 mm (1pcs)
D-75013 - 150 mm (1pcs)
D-75029 - 150 mm (1pcs)
D-75035 - 150 mm (1pcs)
D-75041 - 150 mm (1pcs)

DTL061
18V Angle Impact Driver



- 6.35 mm (1/4")
- Compact right-angle design for tight spaces
- 60 N-m (530 in.lbs.) max torque, 0–2,000 RPM, 0–3,000 IPM
- Over 1 ft. reach with 360° rotatable head
- 1/4" hex chuck for quick bit changes

DTL061Z: Bare Tool (Battery and charger sold separately)

DTL302
18V Angle Impact Wrench



- 3/8" (9.5 mm) square drive with C-ring
- High torque for loosening stuck bolts
- 310 - 340 N-m (230 - 250 ft.lbs.) max torque
- Nut-busting torque 500 - 530 N-m (370 - 390 ft.lbs.)
- 3-stage LED light
- Ideal for auto and agricultural machinery maintenance

DTL302Z: Bare Tool (Battery and charger sold separately)

NEW

DWR180
18V Ratchet wrench




- 9.5 / 6.35 mm (3/8 / 1/4")
- 47.5 N-m (420 in.lbs.) max torque, 0–800 RPM
- Includes 2 socket adapters for versatile use
- Lock-pin ratchet mechanism for pass-through tightening (13mm nut on M8 rod)

DRW180Z: Bare Tool (Battery and charger sold separately)



Automotive, machinery, and assembly work — perfect for fastening in tight or hard-to-reach spaces.

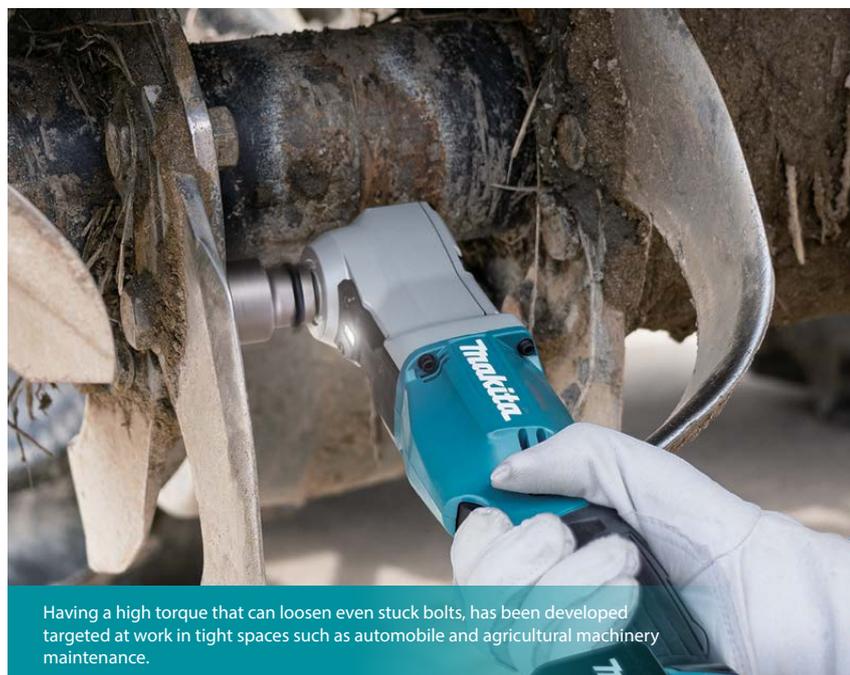

Having a high torque that can loosen even stuck bolts, has been developed targeted at work in tight spaces such as automobile and agricultural machinery maintenance.

ACCESSORIES FOR ANGLE IMPACT DRIVER



135183-8
Angle attachment for DTL061 - 3/8" SQ



192439-2
Ratchet attachment for DTL061 - 21 mm



Socket adapter for ratchet attachment
134745-9 - 3/8"
134746-7 - 1/2"



Sockets for ratchet attachment
134743-3 - 17 mm
134744-1 - 19 mm

ACCESSORIES FOR RATCHET WRENCH




Ratchet head adapter
191A50-3 - 3/8"
191A51-1 - 1/4"



Socket 3/8"
B-39908 - 8 mm
B-39920 - 10 mm
B-39942 - 12 mm
B-39958 - 13 mm
B-39964 - 14 mm
B-39992 - 17 mm
B-40010 - 19 mm
B-40032 - 21 mm
B-40048 - 22 mm

HAMMER DRIVER DRILL/ DRIVER DRILL

- Hammer Drilling
- Drilling
- Fastening
- Torque Settings

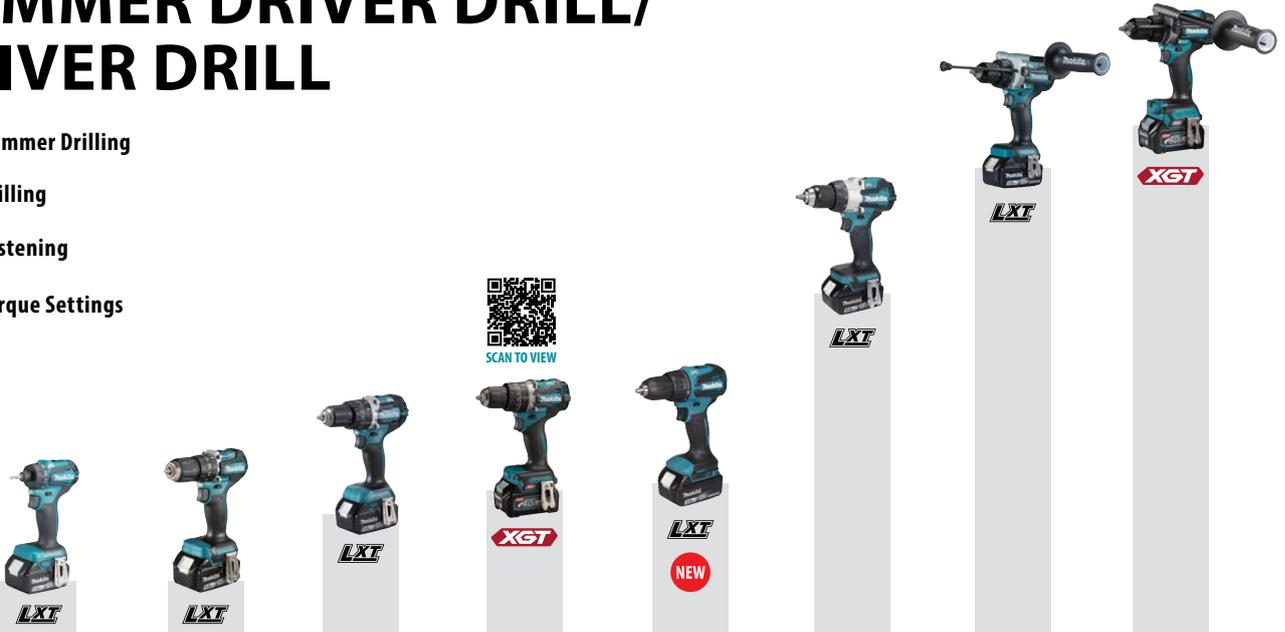

MAX. FASTENING TORQUE							
Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm
40	40	54	64	65	110	130	150
HAMMER DRIVER DRILL							
	DHP487	DHP484	HP002G	DHP490	DHP489	DHP486	HP001G
DRIVER DRILL							
	13 mm Ø steel	20 mm Ø steel					
DRIVER DRILL							
HEX CHUCK	DDF487	DDF484	DF002G	DDF490	DDF489	DDF486	DF001G
	13 mm Ø steel	20 mm Ø steel					



BL Motor is electronically controlled for optimal energy use, delivering longer run time, more power, and extended tool life.

ACCESSORIES FOR HAMMER DRIVER DRILL OR DRIVER DRILL



Screw bit E-form Impact Black
E-08763 - 50 mm (2pcs)



Impact Black bit holder
E-08785 - 60 mm, magnetic

Impact Black screw bit set



E-14227 - 1/4 Hex Screw Bits & Extension Key Chain Set 8pc/Set
PH1 X 1, PH2 X 1, PH3 X 1, T15 X 1, T20 X 1, T25 X 1, T30 X 1, 1/4 HEX Extension Bit, Key Chain Holder




E-06622 - 33pcs
16 X 25mm long screws: PH1, 3xPH2, PH3, PZ1, 3 X PZ2, PZ3, T15, 2xT20, 2xT25, T30
6 X metal drill bits: 2.5mm, 3.0mm, 3.5mm, 4.0mm, 4.5mm, 5.0mm
6 X magnetic 50mm long screws: Ph2, PZ2, T15, T20, T25, T30
3 X magnetic screw holders: 6mm, 8mm, 10mm
1 X magnetic screw holder: 60mm
1 X magnetic anti-roll screw holder connector: 80mm



E-14233 - 1/4 X 50mm Hex Screw Bits 10pc/Set
PH1 X 1, PH2 X 2, PH3 X 2, T15 X 1, T20 X 2, T25 X 2, Holder Case

ANGLE GRINDER

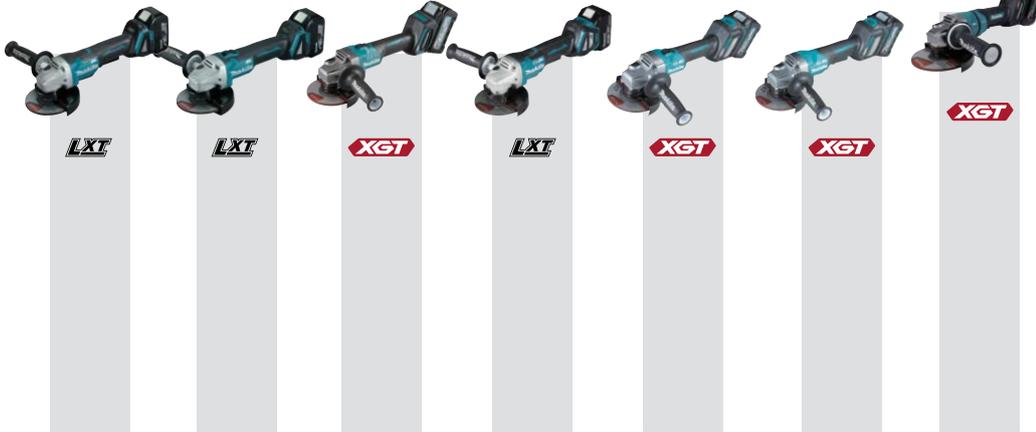

WHEEL DIAMETER

mm
125

DGA508
Electric Brake
8500 min⁻¹

mm
125

DGA506
Electric Brake
8500 min⁻¹

mm
125

GA005G
Electric Brake
8500 min⁻¹

mm
125

DGA517
Electric Brake, Variable Speed
3000-8500 min⁻¹

mm
125

GA023G
Electric Brake, Variable Speed
3000-8500 min⁻¹

mm
125

GA029G
Electric Brake, Variable Speed
3000-8500 min⁻¹

mm
150

GA051G
Electric Brake
9000 min⁻¹

mm
180

GA037G
Electric Brake
7800 min⁻¹

mm
230

GA038G
Electric Brake
6600 min⁻¹



Electric Brake

maximizes productivity and increases safety for operator



Variable Speed

maximizes productivity and increases safety for operator



Slide Switch

Slide switch with lock-on for operator convenience



Paddle Switch

Large trigger switch for easy operation



ACCESSORIES FOR ANGLE GRINDER



Grinding wheel for Metal
A-80933 - 125 mm (A36P)
D-18465 - 125 mm (A24R)




Grinding/cut off wheel for Metal Depressed
A-85313 - 125 mm (A30R) D-80014 - 125 mm (A30S)



Grinding wheel for stainless
B-51655 - 125 mm (SA46P)



Thin cut-off wheel for stainless
E-03040 - 125 mm (A60T)
D-18770 - 125 mm (WA60T)

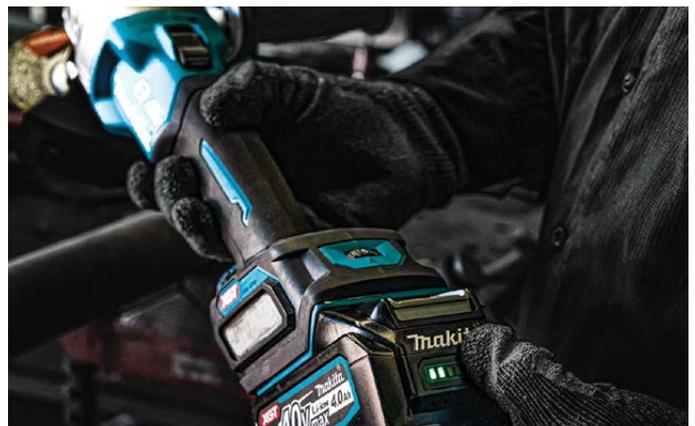

TM001G 40Vmax Multi Tool



- Compatible with STARLOCK / STARLOCK PLUS / STARLOCK MAX
- 12 angle settings (0°–360°, every 30°)
- AVT (Anti-Vibration Technology) for low vibration performance
- 10,000–20,000 opm with soft start

TM001GZ01: Bare Tool (Battery and charger sold separately)



SCAN TO VIEW

JR002G 40Vmax Recipro Saw



- 1,800 W delivering powerful cutting performance
- High cutting speed: up to 3,000 spm with 32 mm stroke length
- Variable speed control: 1,000 – 3,000 spm for different materials
- Anti-Vibration Technology (AVT) for less vibration

JR002GM201: Rapid Charger (DC40RA), 2 x 4.0Ah Batteries (BL4040), Makpac

JR002GD201: Rapid Charger (DC40RA), 2 x 2.5Ah Batteries (BL4040), Makpac

JR002GZ: Bare Tool (Battery and charger sold separately)



SCAN TO VIEW

PB002G 40Vmax Portable Band Saw



- Designed mainly for cutting 4" to 4-1/2" steel pipes efficiently
- Cutting capacity of 127 mm
- Blade speed up to 3.2 m/s
- Precise metal cutting

PB001GM201: Rapid Charger (DC40RA), 2 x 4.0Ah Batteries (BL4040), Carrying Case

PB001GZ: Bare Tool (Battery and charger sold separately)

ACCESSORIES FOR MULTI TOOL



B-65006
HCS, Multi Material



B-69761
TC/HM, Multi Material




B-64951
TC/HM, Metal



B-65115
Sanding pad DELTA - velcro

Sanding paper

- Paint, varnish, wood, metal
- B-21680 - 60# (10pcs)
 - B-22969 - 120# (10pcs)
 - B-21705 - 100# (10pcs)
 - B-21711 - 240# (10pcs)
 - B-21727 - 320# (10pcs)



Related Products

JV002G 40Vmax Jig Saw

Steel: 10 mm, Alu: 20 mm



DTM52 18V Multi Tool

STARLOCK MAX



DJR187 18V Recipro Saw

Pipe: 130 mm



DPB180 18V Portable Band Saw

Pipe: 120 mm



ACCESSORIES FOR RECIPRO SAW



Recipro saw blade - curved edge

- Metal, pipes, profiles
- B-55815 - 130 mm (5pcs)
 - B-55837 - 280 mm (5pcs)
 - B-55821 - 205 mm (5pcs)



Recipro saw blade

- Wood, chipboard, metal, plastics, fiberglass
- B-49834 - 152 mm (1pcs)
 - B-49856 - 152 mm (1pcs)
 - B-49840 - 152 mm (1pcs)

ACCESSORIES FOR PORTABLE BAND SAW



Band Saw Blade

- 792560-3 - More than 5 mm (3pcs)
- 792559-8 - 4 mm - 5 mm (3pcs)
- 792558-0 - Less than 4 mm (3pcs)
- B-30128 - More than 5 mm (1pcs)
- 792557-2 - More than 5 mm (1pcs)
- 792556-4 - 4 mm - 5 mm (1pcs)
- 194692-6 - Less than 4 mm (1pcs)

DMC300
18V COMPACT CUT OFF



- 76mm (3") cutter suitable for small cutting jobs
- Cut-off wheel for Steels, Stainless steels
- AFT (Active Feedback sensing Technology) for kickback reduction
- Lock-off function prevents accidental start up
- Electric brake for maximum productivity

DMC300RTJ: Rapid Charger (DC18RC), 2 x 5.0Ah Batteries (BL1850B), Makpac
DMC300Z: Bare Tool (Battery and charger sold separately)

DRV250
18V RIVET GUN



- 30 mm (1-3/16") stroke
- Rivet diameter range of 2.4–6.4 mm
- Brushless motor provides 20 kN of max pulling force
- Rivet holding mechanism that keeps rivets in place even in vertical-down applications
- Ideal for tight-space and close-to-wall riveting

DRV250Z: Bare Tool (Battery and charger sold separately)



Designed for automotive, plumbing, and HVAC work, it offers compact power for small tasks like cutting thin metal sheets and pipes.



Car repairs often require access in confined areas, like wheel wells, door frames, or under the hood. The compact jaw case of the rivet gun allows you to install rivets close to walls and in narrow spaces where larger tools cannot reach.

ACCESSORIES FOR COMPACT CUT OFF



122C54-6
Dust cover



D-78374
Tungsten carbide grit blade
Plaster board, plastic, fiberglass



D-74815-5
Thin cut-off abrasive wheel (5pcs)
Metal, stainless steel

ACCESSORIES FOR RIVET GUN



Accessory set
Nose piece, jaw pusher, pipe

- 191F80-4 - 4,0 mm rivets
- 191F79-9 - 4,8 mm rivets
- 191V0-2 - 6,0 mm rivets
- 191F78-1 - 6,4 mm rivets



199731-7
Jaws for 2,4-4,8 mm rivets



191D57-7
Grease



199730-9
Jaws for 4,8-6,4 mm rivets

GD001G
40Vmax Die Grinder

NEW



SCAN TO VIEW



XGT
BL
XPT
AFT
BRAKE



Slide Switch

- Max collet size is 8 mm (5/16")
- Variable speed dial: High speed: Deburring, grinding
Low speed: Polishing, paint/rust removal
- Shaft lock for easy accessory changes
- Slide switch with lock-on for convenience

GD001GZ: Bare Tool (Battery and charger sold separately)

GD002G
40Vmax Die Grinder

NEW



SCAN TO VIEW



XGT
BL
XPT
AFT
BRAKE



Paddle Switch

- Max collet size is 8 mm (5/16")
- Variable speed dial: High speed: Deburring, grinding
Low speed: Polishing, paint/rust removal
- Shaft lock for easy accessory changes
- Paddle Switch: Convenient one-handed operation with increased control and safety

GD002GZ: Bare Tool (Battery and charger sold separately)

GP001G
40Vmax Grease Gun

NEW



XGT
BL
XPT



- Max discharge pressure: 69 MPa
- 2 speed discharge selection with preset counter & LCD display
- Air lock detection function
- Lock-on button for comfortable continuous use
- Flexible hose for easy operation in tight spaces

GP001GZ: Bare Tool (Battery and charger sold separately)



DGD800
18V Die Grinder
LXT
Collet size: 8 mm



DGP180
18V Grease Gun
LXT
69 MPa



ACCESSORIES FOR DIE GRINDER



SA carbide burr 10x20 mm
B-52738 - Ø6 mm non-ferrous cut
B-52722 - Ø6 mm diamond cut



SM carbide burr 10x20 mm
B-52853 - Ø6 mm non-ferrous cut
B-52847 - Ø6 mm diamond cut



SC carbide burr 10x20 mm
B-52766 - Ø6 mm non-ferrous cut
B-52750 - Ø6 mm diamond cut



Collet cone
763670-3 - Ø6 mm
763671-1 - Ø8 mm



SF carbide burr 10x20 mm
B-52794 - Ø6 mm non-ferrous cut
B-52788 - Ø6 mm diamond cut



763668-0
Collet nut



SL carbide burr 10x25mm
B-52825 - Ø6 mm non-ferrous cut
B-52819 - Ø6 mm diamond cut

ACCESSORIES FOR GREASE GUN



122D16-0
410 g grease cartridge A



191W60-2
3 grease coupler set



1916S5-1
Flexible hose with coupler - 1.200 mm



1916U8-9
Grease angle coupler



1911M9-1
Extension pipe for flexible hose

B0001CG
40Vmax Random Orbit Sander



SCAN TO VIEW



XGT
BL
XPT
AWS



- 125 mm (5")
- Orbit diameter of 5.0 mm, good for smoother, swirl-free finishes
- Connector-style battery connection reduces in-hand weight
- Less dust clogging, longer continuous use, improved efficiency on paints; compatible with hook-and-loop attachment

B0001CGZ: Bare Tool (Battery and charger sold separately)

B0003CG
40Vmax Random Orbit Sander



SCAN TO VIEW



XGT
BL
XPT
AWS



- 125 mm (5")
- Orbit diameter of 3.0 mm, good for smoother, swirl-free finishes
- Variable speed: approx. 6,000 to 10,000 orbits/min (OPM) depending on setting
- Soft start, electric brake, and anti-restart are included

B0003CGZ: Bare Tool (Battery and charger sold separately)

DB0180
18V Random Orbit Sander



LXT



- 125 mm (5")
- Large 2.8 mm orbit for fast sanding and swirl-free finish.
- Compatible with 125 mm hook-and-loop abrasive paper (8-hole)
- Three speed settings (7,000/9,500/11,000 OPM)
- With Built-In Dust Extraction System

DB0180Z: Bare Tool (Battery and charger sold separately)

ACCESSORIES FOR RANDOM ORBIT SANDER




1914H3-6
Battery adapter 1.6 m



1914H5-2
Battery adapter 5.0 m



1914J2-2
Sanding pad 125 mm



D-78704
Pad saver Ø 125 mm (2pcs)




Net type abrasive disc Ø 150 mm
Exceptional dust extraction and consistent finish — ideal for high-performance sanding. *Use with a pad saver for maximum durability.



1914H8-6
Harness for batteries

- D-78651 - 80# (10pcs)
- D-78667 - 120# (10pcs)
- D-78673 - 180# (10pcs)
- D-78689 - 240# (10pcs)
- D-78695 - 320# (10pcs)

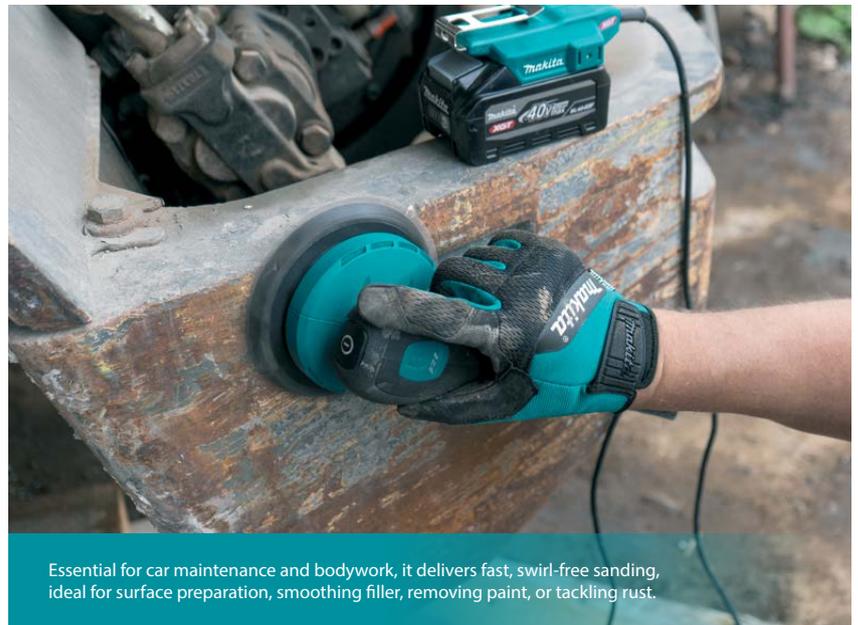

Essential for car maintenance and bodywork, it delivers fast, swirl-free sanding, ideal for surface preparation, smoothing filler, removing paint, or tackling rust.



MP001G 40Vmax Inflator



SCAN TO VIEW



- High air discharge — quickly inflates large tires
- 3 inflation modes: High Speed / Low Speed / Ball
- Air release button for deflating excess pressure
- Auto-stop at preset pressure
- High max pressure: 1,110 kPa (161 PSI / 11.1 bar)
- 65 cm long hose

GP001GZ: Bare Tool (Battery and charger sold separately)

DBS180 18V Belt Sander



- Belt width: 6 mm / 9 mm / 13 mm
- Belt speed up to 1,700 m/min
- Adjustable sanding arm pivots up to 160° for compact storage
- Large 533 mm (21") belt length for faster work
- Movable LED job light

DBS180Z: Bare Tool (Battery and charger sold separately)

DPV300 18V Sander Polisher



SCAN TO VIEW

- Twist-on/Twist-off: 50 mm (2") — for sanding
- Hook & Loop: 80 mm (3-1/8") — for polishing
- Variable 2-speed control for versatile applications
- Electronic speed control maintains constant speed under load
- Lock-on switch for reduced hand fatigue during long use

DPV300RT: Rapid Charger (DC18RC), 2 x 5.0Ah Batteries (BL1850B), Makpac
GD002GZ: Bare Tool (Battery and charger sold separately)




DMP180 18V Inflator

830 kPa (121 PSI)



Ideal for precision work in tight spaces, perfect for cleaning welds, smoothing edges, and removing rust.

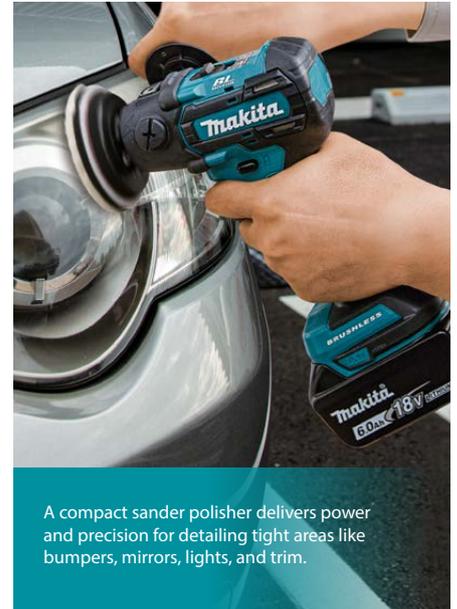

A compact sander polisher delivers power and precision for detailing tight areas like bumpers, mirrors, lights, and trim.

ACCESSORIES FOR BELT SANDER



125157-7
Sanding arm - 6 mm

125159-3
Sanding arm - 13 mm



Sanding paper

6x533 mm
Metal, wood

- A-34512 - A40 (10pcs)
- A-34528 - A60 (10pcs)
- A-34534 - A80 (10pcs)
- A-34540 - A100 (10pcs)
- A-34556 - A120 (10pcs)

9x533 mm
Metal, wood

- A-34447 - A40 (10pcs)
- A-34453 - A60 (10pcs)
- A-34469 - A80 (10pcs)
- A-34481 - A120 (10pcs)

13x533 mm
Metal, wood

- A-34562 - A40 (10pcs)
- A-34578 - A60 (10pcs)
- A-34584 - A80 (10pcs)
- A-34590 - A100 (10pcs)
- A-34609 - A120 (10pcs)

ACCESSORIES FOR INFLATOR



TE00000691
Air pump adapter with 30° head angle

TE00000796
Air pump adapter with 0° head angle

ACCESSORIES FOR SANDER POLISHER



Sanding paper 50 mm

Metal, stainless steel, aluminium

- E-07412 - A60 (25pcs)
- E-07428 - A80 (25pcs)
- E-07434 - A120 (25pcs)
- E-07440 - Z60 (25pcs)
- E-07456 - Z80 (25pcs)



Felt pad 50 mm

For evenly removing welding spatter, paint, rust, fine scratches, dirt and fine finishing

- E-07462 - rough/hard (25pcs)
- E-07478 - medium/hard (25pcs)
- E-07484 - fine/hard (25pcs)
- E-07490 - medium/soft (25pcs)
- E-07509 - fine/soft (25pcs)
- E-07515 - very fine/soft (25pcs)



191N92-5

Wool pad 80 mm - velcro
For polishing heavily weathered paint and deep scratches

PV001G
40Vmax Polisher



- 180 mm (7") brush pad, 165 mm (6-1/2") pad diameter
- Wide constant-speed range (600–2,200 min⁻¹)
- Maintains consistent speed under load for a professional finish
- Elastomer bumpers are positioned at the portions most likely to hit car body
- Ideal for car body polishing, scratch removal, and finishing

PV001GM101: Rapid Charger (DC40RA), 1 x 4.0Ah Battery (BL4040), Accessories
PV001GZ: Bare Tool (Battery and charger sold separately)



DP0600
18V Random Orbit Polisher



150 mm, 5.5 mm orbit

HG001G
40Vmax Heat Gun



- Max temperature: 600°C
- Air volume: 120 / 150 / 180 / 200 L/min
- Automatic current adjustment maintains temperature and airflow as battery drains
- Backlit LCD with: numeric temperature (°C/°F), airflow icons, battery gauge, and error indicators

HG001GZ02: Bare Tool, Carrying Case (Battery and charger sold separately)



DHG180
18V Heat Gun



550 °C, 110 L/min



DCG180
18V Caulking Gun



- Delivers an industry-leading 5,000 N of dispensing force
- 5 speed dial optimizes flow rate from 0 - 28 mm/sec.
- 360° rotatable cartridge holder fits 800 mL, 600 ml and 300 ml cartridges
- Overload indicator light notifies the operator when tool is nearly overloaded to minimize breakage of the sealant cartridge

DCG180ZB: Bare Tool, comes with Holder B set (600ml) (Battery and charger sold separately)



Caulking gun provides precise, consistent application for sealing windows, body seams, and weatherproofing joints, helping to prevent leaks, rust, and vibration-related damage.

ACCESSORIES FOR POLISHER



192629-7
Wool polishing pad - 180 mm, velcro



794176-0
Wool polishing cover - 180 mm, tie back



743053-3
Backing pad - 165 mm, velcro

ACCESSORIES FOR CAULKING GUN



196351-8
300 ml cartridge holder



1911T4-0
600 ml cartridge style, sausage style and bulk cauls and adhesives

ACCESSORIES FOR HEAT GUN



PR0000028
Glass protection nozzle



PR0000029
Wide-slot nozzle



PR0000030
Reflector nozzle



PR0000032
Overlap welding nozzle



PR0000034
Welding nozzle

DVP181
18V Vacuum Pump
LXT



- 4 CFM class cordless vacuum pump (113 L/min flow rate)
- Ultimate vacuum: 3 Pa suitable for professional HVAC work
- Drain port with valve allows easy oil replacement
- Oil tank capacity: 300 mL
- Dual-stage compression generates a much higher vacuum than single-stage

DVP181ZK: Bare Tool, Carrying Case (Battery and charger sold separately)

AS001G
40Vmax Dust Blower



SCAN TO VIEW


- Air Velocity: 0–200 m/s, Air Volume: 0–1.1 m³/min
- Blowing Force: Mode 4: 0–2.8 N
- Variable speed trigger with 4-stage air volume
- 5 nozzles included for wide range of applications
- Blow-off works and dust removal from narrow spaces or OA equipment

AS001GZ02: Bare Tool (Battery and charger sold separately)



DAS180
18V Dust Blower

LXT
200 m/s, 2.8 N

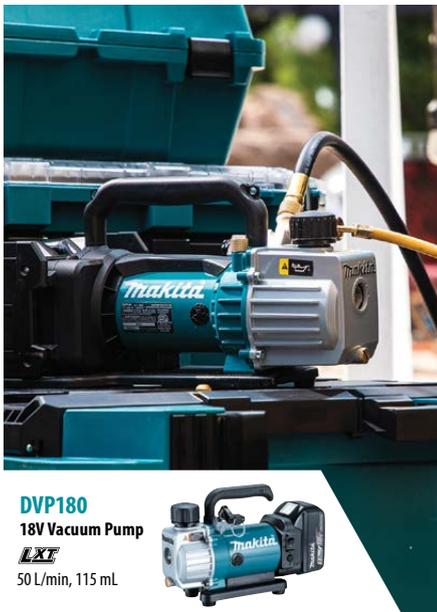

DVP180
18V Vacuum Pump
LXT
50 L/min, 115 mL



With its variety of nozzles, is ideal for car maintenance tasks like blowing off dust, cleaning filters, and inflating or deflating tires and inflatable accessories.

ACCESSORIES FOR VACUUM PUMP



AS0A1154MK
Vacuum hose

AS0Y06110K
Adapter



AS00VP050M
150ml
AS0VP083MK
300ml
Vacuum pump oil

ACCESSORIES FOR DUST BLOWER



191X13-7
Nozzle for cleaning filters - ø 7 mm



191X15-3
Nozzle for blowing - ø 13 mm



191X29-2
Filter assembly



191X19-5
Wide angle nozzle



191X78-9
Nozzles for blowing in narrow space

UB001G
40Vmax Blower



SCAN TO VIEW



- Powerful blowing force (Max 17N)
- High air volume and speed up to 16 m³/min airflow in Boost mode
- Max air velocity up to 64 m/s
- Lock-on button operable from either side of handle for continuous operation

UB001GZ: Bare Tool (Battery and charger sold separately)

UB002G
40Vmax Blower



SCAN TO VIEW



- Powerful blowing force (Max 3.2N)
- With up to 3.6 m³/min airflow and up to 99 m/s velocity (standard nozzle) this tool can handle strong job-site
- 3-stage air volume settings by dial
- Easy to maneuver thanks to its compact and lightweight design

UB002GZ: Bare Tool (Battery and charger sold separately)

DUB186
18V Blower



- Max air velocity: 68 m/s, Max air volume: 3.2 m³/min
- Larger air volume has been obtained by increasing the air outlet diameter
- Delivers a maximum air speed of 68 m/s for faster job site clean up
- Variable 3-speed for optimum speed control

DUB186Z: Bare Tool (Battery and charger sold separately)



DUB184
18V Blower

LXT


52.1 m/s, 10.9 N



DUB185
18V Blower

LXT

81 m/s, 3.1 N

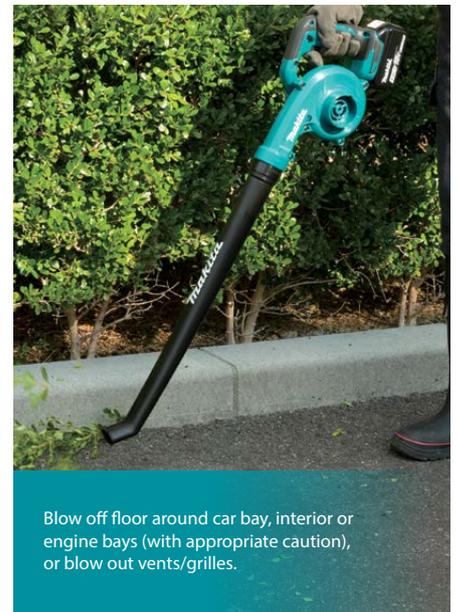

Blow off floor around car bay, interior or engine bays (with appropriate caution), or blow out vents/grilles.

ACCESSORIES FOR BLOWER (UB001G)



191L96-5
Adapter pipe



197888-8
Round nozzle



197889-6
Flat nozzle



166094-6
Shoulder belt

ACCESSORIES FOR BLOWER (UB002G / DUB185 / DUB186)



191M30-1
Brush nozzle



191M32-7
Wiper nozzle



191M34-3
Flexible hose



123241-2
Dust bag



192236-6
Tapered nozzle

VC014GL
40Vmax Vacuum Cleaner

NEW



SCAN TO VIEW



XGT
BL
XPT
HEPA
Filter



- Capacity: 7.5 L for dry dust and 4.5 L for wet debris
- Maximum suction power of 165 W
- Max sealed suction up to 15 kPa
- The HEPA filter effectively captures very fine particles
- Two tools in one: quickly converts from vacuum to blower for enhanced versatility

VC014GLZ: Bare Tool (Battery and charger sold separately)

DCL184
18V Vacuum Cleaner



LXT



- Capacity: Cloth bag about 500 mL, paper bag 330 mL
- Maximum suction power of 38 W
- Max sealed suction up to 5.4 kPa
- Max air volume (cleaning mode): 1.4 m³/min
- Designed for cleaning compact spaces and especially vehicle interiors

DCL184Z: Bare Tool (Battery and charger sold separately)

VS001G
40Vmax Vacuum Sweeper



XGT
BL
XPT
HEPA
Filter



- Cleaning width with Main brush 480 mm; Side brush 650 mm
- Dust container capacity: 24L
- Main brush height adjustment approx. 20mm
- HEPA filter use for captures fine dust for cleaner air
- The cleaning width is limited to the width of a typical door (800mm or less) for easy maneuverability in the field

VS001GZ: Bare Tool (Battery and charger sold separately)



DVC750
18V Vacuum Cleaner
LXT
6.7 Kpa, 50 W



A fast, efficient cleaner for workshop floors and parking areas that collects all debris while minimizing dust.

ACCESSORIES FOR VACUUM CLEANER (VC014GL)



1915G6-9
Ø 28 mm x 5 m hose with adapters for dust extraction



1915W5-3
Paper dust bag (10pcs)



1915T3-6
Filter dust bag (10pcs)



195432-5
High quality poly dust bag – 45 l (10pcs)



1915G5-1
4 castor wheels

ACCESSORIES FOR VACUUM SWEEPER (VS001G)



1913F7-8
Dust bag - 47 l
Suitable for collecting large volume of dry debris such as coarse dirt, leaves, paper, pastic bags ...



191D12-9
HEPA Filter

DHW180
18V Pressure Washer



SCAN TO VIEW

2
LXT
XPT



- Delivers a high pressure of 2.4 MPa
- 5-in-1 nozzle allows for easy mode changes by rotating the nozzle head
- Selectable from two power modes depending on applications
- The regular flow rate for self-priming in high mode is 2.5 L/min
- The supplied hose length is 6 meters

DHW180Z: Bare Tool (Battery and charger sold separately)

DHW080
18V High Pressure Washer

2
LXT
BL
XPT



- Cordless operation using 2 X 18V batteries in series
- Max permissible pressure up to 8.0 MPa
- 5.5 MPa Regular Pressure
- Water flow: up to about 6.3 L/min max feed volume
- A water tank with a capacity of approx. 50 L
- Maximum inlet water temperature: up to 40 °C

DHW080ZK: Bare Tool (Battery and charger sold separately)

HW001G
40Vmax High Pressure Washer



SCAN TO VIEW

3
XGT
BL
XPT



- Maximum permissible pressure of 11.5 MPa
- Flow rate up to 7.0 L/min (in highest mode)
- 3 operation modes
- Good mobility and transportability with 140mm diameter wheels
- Telescopic handle for easy transportation and storage

HW001GZ: Bare Tool (Battery and charger sold separately)



This handgun style model is lightweight and easy-to-handle, yet providing sufficient cleaning power for light-duty washing tasks on work sites and for home use.



ACCESSORIES FOR PRESSURE WASHER



LX0000001
Foam nozzle with container



LX0000002
Angle nozzle



LX0000003
Wheel brush

ACCESSORIES FOR HIGH PRESSURE WASHER



1912Y2-5
Foam nozzle with container



1910R2-4 + 1910R1-6
Accessories for self priming



197845-6 (5m)
197847-2 (8m)
197850-3 (10m)
High pressure extension hose



197831-7
Rotary brush



197828-6
Wash brush



197859-5 (for 110-127V)
198909-9 (for 220-240V)
Under body spray lance set

ML012G 40Vmax Bar Light

XGT
XPT



SCAN TO VIEW



- Provides bright lighting with a maximum of 1,700 lumens
- Illuminance at 0.5m: 2,000 lx (high), 1,000 lx (medium), 450 lx (low)
- 3 brightness settings
- LED light bar can be folded in half
- Illuminating angle adjustment by rotating LED light bar

ML012G: Bare Tool (Battery and charger sold separately)

ML011G 40Vmax Worklight

XGT
USB



SCAN TO VIEW



- Provides lighting with a maximum of 300 lumens
- Illuminance at 0.5 m: 240 lx (sidelighting + uplighting), 190 lx (sidelighting or uplighting only)
- 5,000K daylight white color temperature
- Compact light with USB output port for a variety of uses

ML011G: Bare Tool (Battery and charger sold separately)

DML813 / DML814 18V Worklight

LXT




DML813

DML814

- Bright light with a max luminous flux of 3,000 lm
- Telescopic light mast enables lighting at a height up to 2.2 m
- Light height is adjustable from 125-224 cm
- Approx. 3 / 10 hours of continuous illumination with BL1850B battery
- The light head has 3 pivoting units for wide-area lighting

DML813: Bare Tool (Battery and charger sold separately)


DML814: Bare Tool (Battery and charger sold separately)

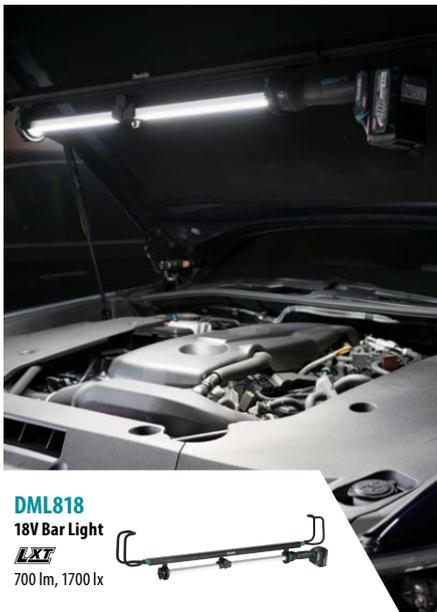

DML818
18V Bar Light
LXT
700 lm, 1700 lx



DML817
18V Worklight
LXT
300 lm, 190 lx

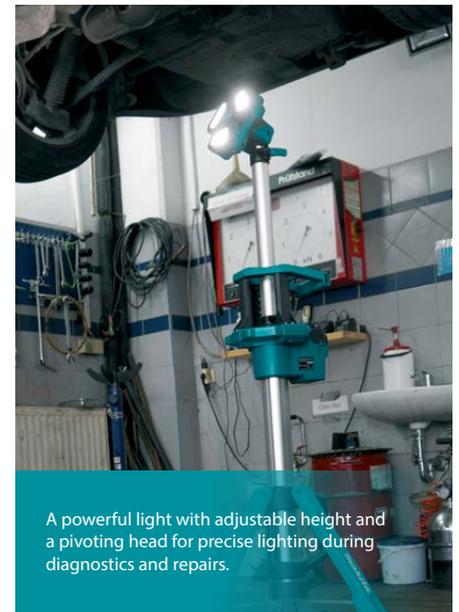

A powerful light with adjustable height and a pivoting head for precise lighting during diagnostics and repairs.

PRODUCT FOR LIGHTING



ML007G
40Vmax Flashlight
XGT
Luminous flux 1250 lm*1 /
Illuminance 82000 lx*2
*1spot + flood mode *2spot mode



DML812
18V Flashlight
LXT
Luminous flux 1250 lm*1 /
Illuminance 51000 lx*2
*1spot + flood mode *2spot mode

OTHER PRODUCTS



CW003G
40Vmax Cooler & Warmer Box
XGT LXT
7 l storage capacity /
Cooling capacity -18 °C /
Warming capacity 60 °C



CF003G
40Vmax Fan
XGT LXT
Fan diameter 450 mm /
Air flow volume of 120 m³/min /
Max air velocity 96-300 m/min



MR006G
40Vmax Job Site Radio
XGT LXT
Bluetooth radio



MW001G
40Vmax Microwave
XGT
500 W microwave power /
Cavity capacity 8 L /
Tempered door glass



MAKTRAK™

THE NEXT GENERATION IN MODULAR STORAGE SYSTEMS™

Introducing the next generation in modular storage systems - Makita MAKTRAK. The smart storage solution of tool boxes and organisers with stackable design, easier access and improved loading/unloading into a truck bed or van.

MAKTRAK tool boxes keep your tools secure and easily accessible. Their dual hinged lids allow access from both sides, without unstacking the boxes, while the innovative horizontal design means they will accommodate larger tools like nailers, saws and rotary hammers.

MAKTRAK organisers are built to keep your workspace efficient and within reach. You can choose from deep medium, low profile medium and deep compact organisers, each designed with maximum durability and storage efficiency in mind.

*Tools, accessories & straps not included



TRANSPORT



Premium handle with Gecko Grips™ provides efficient truck/van loading and unloading.



ACCESS



Horizontal dual-hinged lid allows access to any case without unstacking or interference from the handle.



STORE

Horizontal design provides wider interior space for larger tools and accessories.



ORGANIZE



Customisable with lid mounting points, panel dividers, bins and battery/ charger storage trays.

LOW-PROFILE MEDIUM ORGANIZER

MEDIUM TOOL BOX

LARGE TOOL BOX

ROLLING TOOL CHEST

DEEP COMPACT ORGANIZER

DEEP MEDIUM ORGANIZER

EXTRA LARGE EXTENSION TOOL BOX

MORE TO COME...

OPEN ANY BOX WITHOUT UNSTACKING MIX, MATCH, AND STACK FOR EFFORTLESS STORAGE

Trak connection works in both directions, providing a strong and secure link while offering a quick disconnection via a lever.



P-91001

ROLLING TOOL CHEST

295mm x 1011mm x 565mm

- Horizontal Design for maximum accessibility; fits long tools
- Dual-Hinged, Removable Lid allows access from both sides
- Premium Handle with Gecko Grips™ for easy truck/van loading and unloading
- Cleat Mount System horizontally connects Extra Large
- Extension Tool Box
- 9" All-Terrain jobsite-rugged wheels



P-91017

LARGE TOOL BOX

252mm x 802mm x 565mm

- Horizontal Design for maximum accessibility; fits long tools
- Dual-Hinged, Removable Lid allows access from both sides
- Multiple Lid Mounting Points for more interior organization
- Molle Panel/Divider for added portability and organization
- Storage Tray designed for batteries, charger & more



P-91023

EXTRA LARGE EXTENSION TOOL BOX

402mm x 394mm x 565mm

- Dual-Hinged, Removable Lid allows access from both sides
- Ability to horizontally Cleat Mount or Vertically Connect to
- Rolling Tool Chest
- Multiple Lid Mounting Points for more interior organization
- Fits oversized tools and accessories
- Storage Tray designed for batteries, charger & more



P-91039

MEDIUM TOOL BOX

161mm x 387mm x 562mm

- Deep trays hold a variety of hand tool
- Shallow trays with multiple dividers for small parts
- Multiple Lid Mounting Points for more space organization
- Fits tools, accessories, batteries, chargers & small parts



P-91045

DEEP MEDIUM ORGANIZER

163mm x 387mm x 562mm

- Up to 40% More Holding Capacity vs. leading competitors
- 5" Deep Bins with divider slots hold a variety of lengths
- Bins Nest together for more space optimization
- Clear Lid to easily see inside & rib design secures bins in place



P-91051

LOW-PROFILE MEDIUM ORGANIZER

85mm x 387mm x 596mm

- Up to 50% More Holding Capacity vs. leading competitors
- Low profile design for efficient small part organization
- Variety of bin sizes to organize small and large parts
- Clear Lid to easily see inside & rib design secures bins in place




P-91067

DEEP COMPACT ORGANIZER

162mm x 278mm x 389mm

- Up to 25% More Holding Capacity vs. leading competitors
- 5" Deep Bins with divider slots hold a variety of lengths
- Bins Nest together for more space optimization
- Clear Lid to easily see inside & rib design secures bins in place

COMFORT-GRIP HANDLE

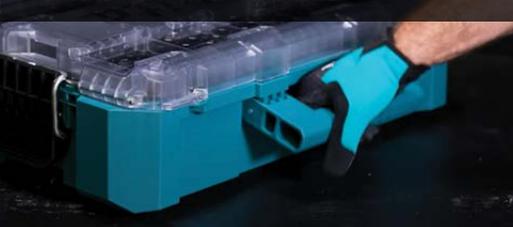

LARGE GLOVE-FRIENDLY LATCH



HIDDEN SECURITY TRACKER SLOT



