



Cordless Impact Driver DTD158



Easy-to Handle Basic Impact Driver



Max fastening torque

170 N·m

High-speed rotation

Max

3,400 min⁻¹

Lightweight at

1.6 kg

with BL1860B



Easy-to Handle Basic Impact Driver


Optimal battery location

BL
MOTOR


High-power
brushless motor

The center of gravity has been moved closer to the center line of the grip, by locating the battery 12mm backward compared with the current model, reducing the strain on the wrist during operation.

DTD158

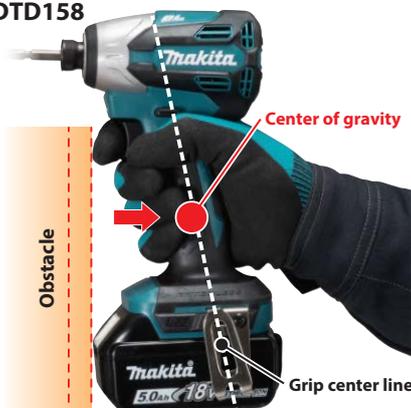

Current model

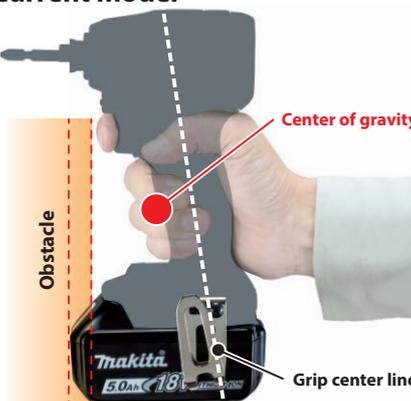

One-touch bit installation

No need to pull bit sleeve for bit installation

Built-in LED light

with preglow and afterglow functions illuminates the work area



Variable speed control by trigger

Ergonomically designed handle with soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.



eXtreme Protection Technology



Charging Time

	Fast Charging	
	DC18RC	DC18SD
*1 BL1815N 1.5Ah 196449-1	15 min	30 min
*1 BL1820B 2.0Ah 197254-9	24 min	45 min
*1 BL1830B 3.0Ah 197599-5	22 min	60 min
*1 BL1850B 5.0Ah 197280-8	45 min	110 min
*1 BL1860B 6.0Ah 197422-4	55 min	130 min
BL1890 9.0Ah 1915H4-0	85 min	200 min
BL18120 12.0Ah 1915J2-8	120 min	265 min

*1 Recommended battery

Accessories

Tool hanger set

Part No.
191K57-9



Hook set

Part No.
194654-4



Battery protector set

Part No.
194649-7



Cordless Impact Driver

DTD158

- Variable Speed
- Brake
- Reversing
- Built-in Job Light

*EN62841-2-2
Standard Equipment:
Hook, Battery, Charger

Capacity	Machine screw: M4 - M8 (5/32" - 5/16"), Standard bolt: M5 - M16 (3/16" - 5/8") High strength bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")
Max fastening torque	170 N·m (1,500 ft.lbs.)
Impacts per minute	0 - 3,600 min ⁻¹
No load speed	0 - 3,400 min ⁻¹
Vibration level	10.9 m/s ² ; * Impact tightening of fasteners of the maximum capacity of the tool
Uncertainty (K) for Vibration	2.0 m/s ² *
Sound pressure level	97 dB (A)*
Sound power level	105 dB (A)*
Noise K factor	3 dB (A)*
Dimensions (L x W x H)	125 x 81 x 233 - 251 mm (4-7/8 x 3-3/16 x 9-1/8 - 9-7/8")
(Battery)	(BLB182 - BL1860B)
Net weight (Battery)	1.3 - 1.6 kg (2.9 - 3.5 lbs.) (BLB182 - BL1860B)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE