

■ Combination Hammer and Rotary Hammer with Dust collection system series

40V max

HR009G+DX11
Capacity: 30mm
Impact energy: 3.9 J



Quick change drill chuck



40V max

HR007G+DX15
Capacity: 28mm
Impact energy: 3.0 J



40V max

HR008G+DX10
Capacity: 30mm
Impact energy: 3.9 J



40V max

HR010G+DX16
Capacity: 20mm
Impact energy: 2.1 J



■ Accessories

Dust case set

Part No.
1916C0-9



HEPA Filter set

Part No.
199596-7

HEPA filter



Dust cup set

For drilling
Part No.
1914L7-6



Dust cup set

For hammering
Part No.
1914L9-2



Hook set

Part No.
191W90-3



Grease vessel set

Part No.
194683-7



Wireless unit set

Part No.
199393-1



Drill chuck set

Part No.
194041-7



■ Charging Time

Model	Fast Charging	
	DC40RA	DC40RC
*1BL4020 2.0Ah 191L29-0	22 min	30 min
*1BL4025 2.5Ah 191B36-3	28 min	38 min
*1BL4040/F 4.0Ah 191N06-8	45 min	67 min
BL4050F 5.0Ah 191L47-8	50 min	85 min
BL4080F/H 8.0Ah F: 191X65-8 H: 1916T7-4	76 min	170 min

Cordless Combination Hammer	
HR011G 28 mm (1-1/8") Adapted for SDS-PLUS bits	
Brake	Blows per minute 0 - 5,000 min ⁻¹
Reversing	No load speed 0 - 1,130 min ⁻¹
Anti-restart function	Capacity Concrete (w/ TCT bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Electronic 4-Speed	Impact energy 3.3 J
Adapted for SDS-PLUS bits	Vibration level * 10.5 m/s ² (Mode: Hammer drilling into concrete) 11.0 m/s ² (Mode: Hammer drilling into concrete with DX17) 7.3 m/s ² (Mode: Chiselling)
Torque Limiter	Uncertainty (K) for Vibration * 1.5 m/s ² (Mode: Hammer drilling into concrete) 1.5 m/s ² (Mode: Hammer drilling into concrete with DX17 / DX18) 1.5 m/s ² (Mode: Chiselling)
Constant Speed	Sound pressure level * 97 dB(A), 98 dB(A) (with DX17) 105 dB(A), 105 dB(A) (with DX17)
Dust Collection	Sound power level * 3 dB(A), 3 dB(A) (with DX17 / DX18)
Built-in Job Light	Dimensions (L x W x H) 391 x 104 x 223 mm (15-3/8 x 4-1/8 x 8-3/4") (Battery) (BL4040/BL4040F)
	Net weight 3.8 - 5.5 kg (8.4 - 12.1 lbs.) (Battery) BL4020 - BL4080F

*EN62841-2-6

Standard Equipment : Side grip, Depth gauge, Grease vessel, Battery, Charger

*1 Recommended battery

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Cordless Combination Hammer
HR011G
28 mm (1-1/8") Adapted for SDS-PLUS bits



XGT
40V Li-ion max

Impact energy

3.3
Joule

Maximum drilling efficiency in its class*

Compact and lightweight design with low vibration

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.



Dust collection system
DX17

Clean operation with excellent maneuverability

Low vibration
Hammer drilling into concrete

10.5 m/s²

Work efficiency
increased by

about 30 %

Compared to our previous model

Max. drilling capacity

28 mm

Photo: HR011G + DX17



Dust collection system DX17 (option)
HEPA filter




Maximum drilling efficiency in its class*


* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.

Drilling efficiency increased by about
30 %
Compared to our previous model

- Drill diameter: $\phi 16.0$ mm
- Depth: 60 mm
- Concrete with compressive strength of 40 N/mm²

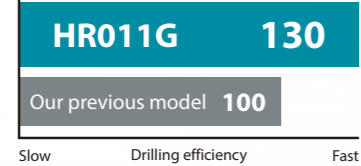

BL MOTOR
High-power brushless motor

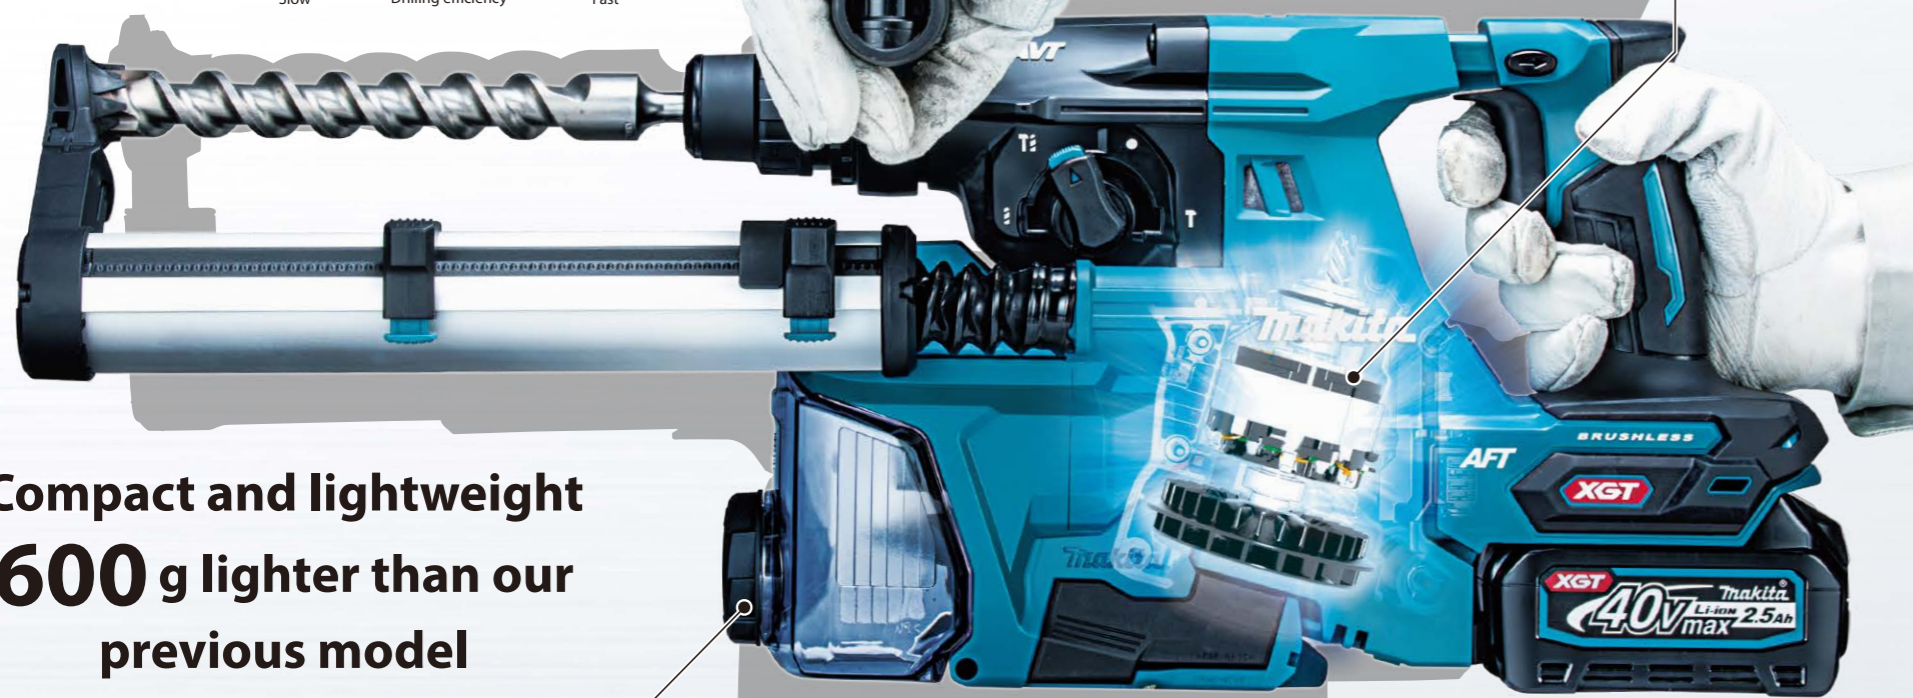

Compact and lightweight
600 g lighter than our previous model



Filter cleaning
Turning the dial removes dust from the filter and restores dust collection performance.

Our previous model
* With the dust collection system installed

XPT
High water-resistance compatible with XPT (eXtreme Protection Technology)

Photo: HR011G + DX17

Three operation modes

Rotation with Hammering



Photo: HR011G with DX17

Hammering only



Photo: HR011G with Dust cup set

Electronic speed switch

From heavy-duty tasks to delicate tasks



Speed indicator	Blows per min: min ⁻¹	Recommended application
4	5,000	Drilling, chiseling and chipping work
3	4,250	Scraping and chiseling work
2	3,250	Reducing breakage and wear when drilling with small-diameter bits
1	1,400	Minimizing edge chipping when drilling into tiles



One-touch attachment and removal

Dust collection system DX17
Clean operation with excellent maneuverability



- Compatible drill bit length: up to 265 mm
- Dust box capacity: 400 mL

AVT Anti-Vibration Technology Low vibration

- Hammer drilling into concrete: 10.5 m/s²
- Hammer drilling into concrete with DX17: 11.0 m/s²
- Chiselling: 7.3 m/s²


Minimizing user strain during continuous operation.



Reduces vibration by counterbalancing piston movement.

AFT Active Feedback sensing Technology

Turns the motor off if bit rotation is suddenly forced to stop.

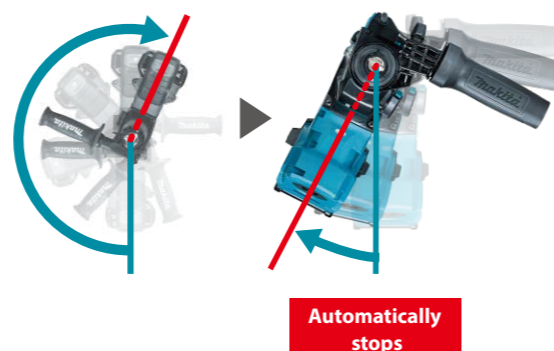

Automatically stops

AWS Auto-start Wireless System

Connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.




Bluetooth

Vacuum cleaner is activated

New light structure

By adopting a light-guiding structure that directs the tool's LED light to the front of the dust collection system, the need for an LED light and LED circuit within the system is eliminated.

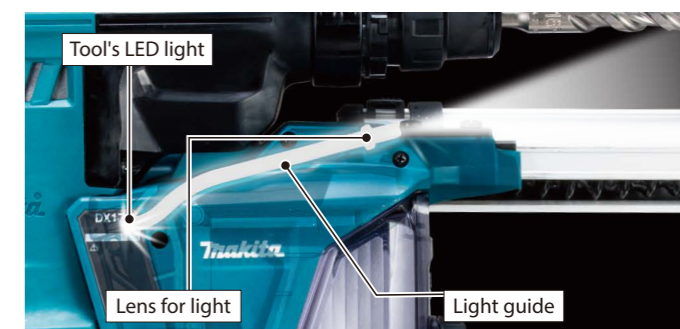

Tool's LED light

Lens for light

Light guide