

VS001G
Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate
about
90%

Cleaning width
with Side brush
650 mm



Makita Cordless Blower
UB003G



**Air volume comparable to
28cc-class engine models**

Accessories

Flat nozzle set
Part No. 1916V7-8



Gutter nozzle set
Part No. 191B03-8



Adapter pipe 80-72 set
Part No. 191L13-5



For connecting the gutter
nozzle set

Vacuum kit set
Part No. 1916T9-0



Capacity: 50 L

Dust bag set
Part No. 191P40-6



Capacity: 25 L

Charging Time

	Fast Charging DC40RA	DC40RC
BL4020 2.0Ah 191L29-0	22 min	30 min
*BL4025 2.5Ah 191B36-3	28 min	38 min
*BL4040/F 4.0Ah 1910N6-8	45 min	67 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min
BL4080F/H 8.0Ah F: 191X65-8 H: 1916T7-4	76 min	170 min

* Recommended battery

Cordless Blower UB003G	
Variable Speed	Blower function
Brake	Max blowing force: 7 / 16N
Anti-restart function	Max air volume: 9.4 / 13.8 m ³ /min (332 / 487 CFM)
Constant Speed	Max air velocity: 0 - 46 / 68 m/s (0 - 103 / 152 MPH)
	Avg. air velocity: 0 - 38 / 56 m/s (0 - 85 / 125 MPH)
	Continuous use: 30 / 9 min
	BL4050F
	Max air volume: 13.0 m ³ /min (459 CFM)
	Max sealed suction: 3.3 kPa
	Dust bag capacity: 50 L (13.2 gal)
	Continuous use: 30 / 9 min
	BL4050F
	Sound pressure level
	86.8dB(A) (EN IEC 62841-4-6)
	Sound power level
	97.3dB(A) (EN IEC 62841-4-6)
	Uncertainty (K) for Noise
	1.7 dB(A) (EN IEC 62841-4-6, Sound pressure level),
	1.8 dB(A) (EN IEC 62841-4-6, Sound power level)
	2.0m/s ² (EN IEC 62841-4-6)
	Vibration level
	1.5m/s ² (EN IEC 62841-4-6)
	Uncertainty (K) for Vibration
	699 - 830 x 201 x 400 mm (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")
	(Attachment)
	With the blower nozzle at shortest to longest, w/o the vacuum kit
	5.0 - 6.1 kg (11.0 - 13.4 lbs.)
	(Battery)
	BL4050F
	(Attachment)
	Min: with the blower pipe and nozzle, Max: with the vacuum kit
Standard Equipment: Flat nozzle, Vacuum kit, Band assembly, Hex wrench, Battery, Charger	

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.



Blowing	
Max air volume	Max air velocity
13.8 m ³ /min	68 m/s
	56 m/s (Average)



Vacuuming	
Max air volume	Max sealed suction
13.0 m ³ /min	3.3 kPa






Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes

Insert. Rotate. Lock with one touch.

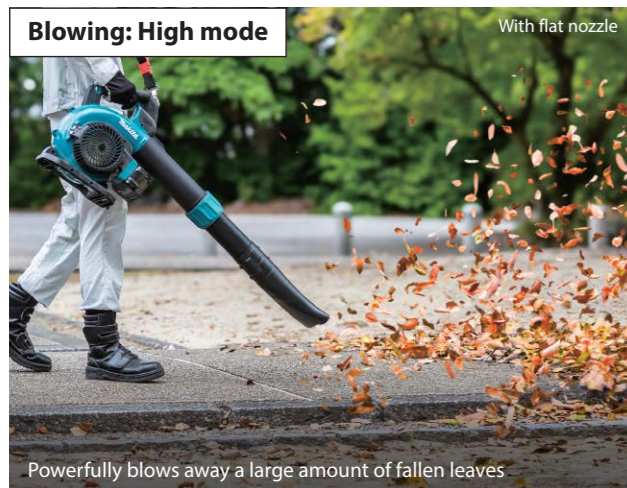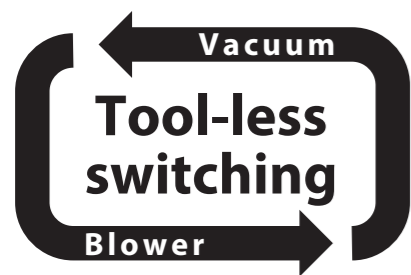

Air volume is adjustable from gentle to strong.

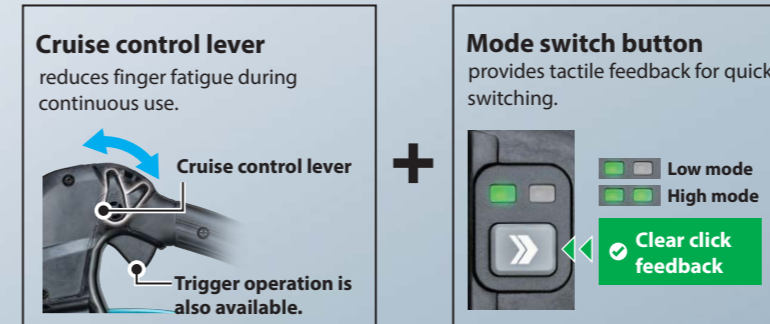

High water-resistance compatible with XPT

eXtreme Protection Technology **XPT**

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About 45 min	About 30 min
High mode	About 15 min	About 9 min

