

■ Also available

**Cordless Blower series**

**UB001G** (Blower function only)  
Powerful blowing force (Max 17N)



**UB003G**

Blowing and vacuuming performance comparable to 28cc-class engine models.



**UB005G**

Lightweight yet powerful for professional use.



■ Accessories

**Cushion belt complete set**

Waist belt for reduced hand reaction force and improved comfort.  
Part No. 1917R2-6



**Battery holder set**

A spare battery holder that attaches to the Cushion belt complete set.  
Part No. 1917R0-0



Cushion belt complete set    Battery holder set

**End nozzle 81 set**

A nozzle with a large air volume that is suitable for blowing away large amounts of fallen leaves.  
Part No. 1918E9-7



■ Charging Time

	Fast Charging DC40RA	DC40RC
<b>BL4020</b> 2.0Ah 191L29-0	<b>22 min</b>	<b>30 min</b>
<b>BL4025</b> 2.5Ah 191B36-3	<b>28 min</b>	<b>38 min</b>
<b>BL4040</b> 4.0Ah 191B26-6	<b>45 min</b>	<b>67 min</b>
<b>*1 BL4040F</b> 4.0Ah 1910N6-8	<b>45 min</b>	<b>67 min</b>
<b>*1 BL4050F</b> 5.0Ah 191L47-8	<b>50 min</b>	<b>85 min</b>
<b>*1 BL4080F/H</b> 8.0Ah F: 191X65-8 H: 19167-4	<b>76 min</b>	<b>170 min</b>

\*1 Recommended battery

**Cordless Backpack Blower**

**UB004G**

Variable Speed	End nozzle diameter	71 mm (2-13/16")
Anti-restart function	Blowing force (Other conditions)	0 - 17 (Low speed) / 23 (High speed) N (BL4080F x2), (Battery)
Electronic 2-Speed	(Attachment)	0 - 17 (Low speed) / 32 (High speed) N (BL4080H x2)
Constant Speed	(End nozzle)	0 - 13.8 (Low speed) / 19.1 (High speed) m <sup>3</sup> /min (BL4080H x2)
<b>Standard Equipment :</b>	Max air velocity (Battery)	81.4 m/s (BL4080F x2), 96.0 m/s (BL4080H x2)
End nozzle,	(Attachment)	(End nozzle)
Flat nozzle,	Air volume (Other conditions)	0 - 13.8 (Low speed) / 16.2 (High speed) m <sup>3</sup> /min (BL4080F x2), (Battery)
Pipe support belt complete	(Attachment)	0 - 13.8 (Low speed) / 19.1 (High speed) m <sup>3</sup> /min (BL4080H x2)
	(End nozzle)	(End nozzle)
	Continuous use (Other conditions)	190* - 38 (Low speed) / 17 (High speed) min. (BL4080F x2), (Battery)
	(Attachment) (Other conditions)	190* - 38 (Low speed) / 14 (High speed) min. (BL4080H x2)
	(End nozzle) (*At max blowing force, 5 N with cruise control)	(End nozzle)
	Vibration level	0.2 m/s <sup>2</sup> (EN IEC62841-4-6, Mode: operation without load)
	Uncertainty (K) for Vibration	1.5 m/s <sup>2</sup> (EN IEC62841-4-6, Mode: operation without load)
	Sound pressure level	81.2 dB (A) (EN IEC62841-4-6)
	Sound power level	94.4 dB (A) (EN IEC62841-4-6)
	Uncertainty (K) for Noise	2.9 dB (A) (Sound pressure level, EN IEC62841-4-6), 2.1 dB (A) (Sound power level, EN IEC62841-4-6)
	Dimensions (L x W x H)	242 x 585 x 522 mm (9-1/2 x 23 x 20-1/2")
	Net weight (Battery)	8.8 kg (19.4 lbs.) (BL4080H x2)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.  
Items of standard equipment and specifications may vary by country or area.

**Lightweight,  
yet powerful**  
**Comparable to 65 cc-class  
engine blowers**



Max  
air volume\*<sup>1</sup>  
**19.1**  
m<sup>3</sup>/min  
With  
BL4080H x2

Max  
air velocity\*<sup>1</sup>  
**96.0**  
m/s  
With  
BL4080H x2

**Run time\*<sup>2</sup> With BL4080H x2**

Low mode	High mode
<b>About 38 min</b>	<b>About 14 min</b>

\*<sup>1</sup> With End nozzle

\*<sup>2</sup> With max blowing force

**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

# Powerful blowing across wide areas — lightweight design with excellent maneuverability



Lightweight at **8.8 kg**  
With BL4080H x2  
**40% lighter**  
Compared with our previous model

**Backpack style**  
The backpack design reduces recoil and arm fatigue.



**Dual-battery system**  
runs on one battery at a time.



**Adjustable air volume from gentle breeze to strong wind**

**One-touch airflow lock via push-button cruise control**




Press the button at any trigger position to hold the airflow level.

**Large control display with high-brightness LEDs for excellent visibility.**



The photo is for illustrative purpose.

**Mode switch button** provides tactile feedback for quick switching.



Clear click feedback even with gloves



**Stepless adjustment within a 250mm range**



**Nozzles for different applications**

**End nozzle 71**  
For blowing away fallen leaves and heavy debris



**End nozzle 81 (Optional accessory)**  
Larger diameter nozzle for higher air volume




**Flat nozzle**  
Concentrated horizontal airflow toward the ground for wet fallen leaves and heavier debris



**Grip position adjustment**  
Adjustable to suit the operator and working posture — 180 mm front-to-rear and 90° to the left and right.

**BL MOTOR**  
Equipped with a high-power brushless motor

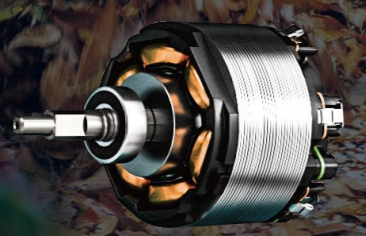

Blowing away wet leaves



Blowing away fallen leaves tangled in the lawn

**Comfortable shoulder harness**  
Optimal materials and shape help reduce fatigue, and a mesh construction improves breathability.



A thick, breathable pad distributes weight to help reduce fatigue.

**Large air-intake**  
helps reduce blockage from fallen leaves and other debris.



**Compact storage**  
One-touch buckle secures the nozzle quickly and easily.



**XPT eXtreme Protection Technology**  
High water-resistance compatible with XPT (eXtreme Protection Technology)