



Cordless Pipe Belt Sander
BS002G



XGT
40V Li-ion
max

Efficient grinding and polishing on curved surfaces

Wide range of belt speeds for different applications

High-efficiency
grinding
Belt speed:

13.5 m/s

(Dial 5)

Maximum
diameter of
metal pipes:

**Ø125
mm**






High-efficiency grinding
Belt speed:
13.5 m/s
(Dial 5)

BL MOTOR

Stepless belt speed adjustment over a wide range for different applications

Dial	Belt speed	Application
1	3.1m/s [190m/min]	Grinding and polishing of stainless steel, Finishing work
2	3.8m/s [230m/min]	
3	5.8m/s [350m/min]	
4	7.9m/s [470m/min]	Rust and paint removal, For rough grinding
5	13.5m/s [810m/min]	



Easy belt change
Push the side grip all the way in, then remove the belt.

Constant speed control
Stable speed under heavy load

Accessories

Abrasive belt

For rough grinding of metal surfaces, such as weld bead removal.

Zirconia (Z), 5pcs. set

Part No.

Z40: D-80927

Z60: D-80933

Z80: D-80949

Z120: D-80955



Abrasive belt surface conditioning

Ideal for removing minor scratches such as paper marks and rust, and for polishing surfaces.

Non-woven fabric, 3pcs. set

Part No.

Coarse: D-80977

Medium: D-80983

Very fine: D-80999



Abrasive belt polishing felt

For mirror finishing of metal surfaces (use with polishing compound).

Soft, 1pc

Part No.

D-80961




Grip 35 set

Part No. 1910X6-8



The side grip can be attached to either side.

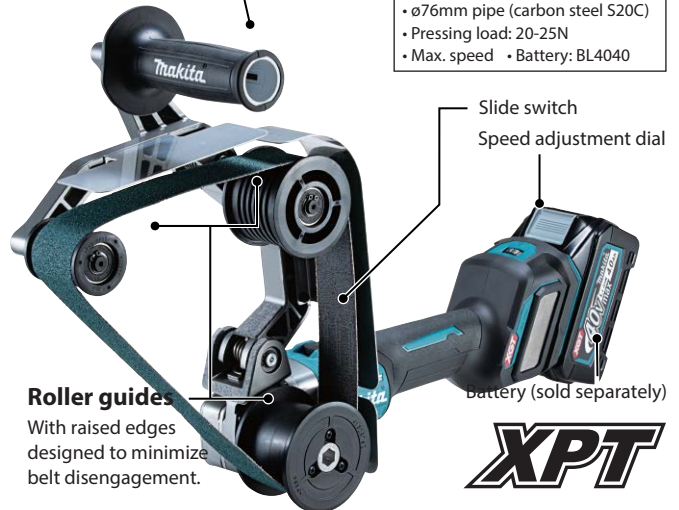

Grinding run time on a full battery charge

About 20 min

- ø76mm pipe (carbon steel S20C)
- Pressing load: 20-25N
- Max. speed • Battery: BL4040

Charging Time

Model	Capacity	Fast Charging	
		DC40RA	DC40RC
*1 BL4020 191L29-0	2.0Ah	22 min	30 min
*1 BL4025 191B36-3	2.5Ah	28 min	38 min
*1 BL4040/F 1910N6-8	4.0Ah	45 min	67 min
BL4050F 191L47-8	5.0Ah	50 min	85 min
BL4080F/H 191X65-8/1916T7-4	8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Pipe Belt Sander

BS002G

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed
- Soft Start
- Carrying Case

Max metal-pipe diameter	125 mm (5")
Belt speed	3.1 - 13.5 m/s
Belt width	40 mm (1-9/16")
Belt length	760 mm (30")
Vibration level	1.9 m/s ² (EN62841-2-4, Mode: Sanding metal pipe)
Uncertainty (K) for Vibration	1.5 m/s ² (EN62841-2-4, Mode: Sanding metal pipe)
Sound pressure level	83 dB(A) (EN62841-2-4)
Sound power level	91 dB(A) (EN62841-2-4)
Uncertainty (K) for Noise	3 dB(A) (EN62841-2-4)
Dimensions (L x W x H) (Battery)	592 x 198 x 359 mm (23-1/4 x 7-3/4 x 14-1/8") BL4040F
Net weight (Battery)	4.2 kg (9.3 lbs.) BL4040F

Standard Equipment : Abrasive belt, Grip, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE