

**Accessories**

**EFFICUT T.C.T. saw blade**

**EFFICUT**  
125 mm x 25T  
Part No. E-28880  
125 mm x 45T  
Part No. B-69462



**Dust nozzle set**

Part No. 194202-9




**Guide rail adapter**

Part No. 191L92-3




**Guide rail**

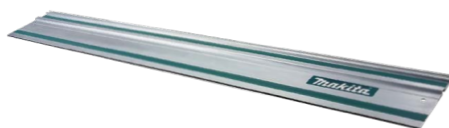

Overall length (m)	Part No.
1.0	199140-0
1.4	194368-5
1.9	194925-9
3.0	194367-7




**Repair parts for guide rail**

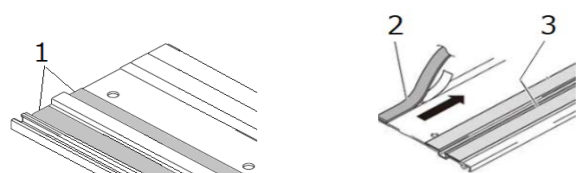

Item	Part No.	
1	Seat 10m set (For upper plastic tape repair)	194416-0
	Position Seat 1.4 m	194418-6
2	Position Seat 1.9 m	194910-2
	Position Seat 3.0 m	194419-4
3	Rubber Seat 10 m set (For lower rubber tape repair)	194417-8

**Clamp set**

(Use with Guide rail)

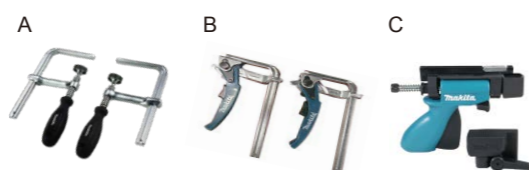


Type	Part No.
A: Standard	194385-5
B: Ratchet	199826-6
C: Push clamp	1913K5-7

**Guide rail connector set**

2pcs set

The Parallel guide cannot be used with the Limit stop

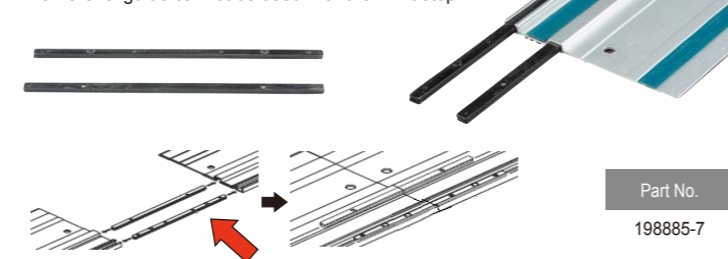

**Charging Time**

Battery	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah 191L29-0	22 min	30 min
*1 BL4025 2.5Ah 191B36-3	28 min	38 min
*1 BL4040/F 4.0Ah 1910N6-8	45 min	67 min

**Cordless Circular Saw**

**HS014G 125 mm (4-7/8")**

Brake	Wheel diameter	125 mm (4-7/8")
Anti-restart function	No load speed	6,400 min <sup>-1</sup>
Soft Start	Bevel range	Left: 15° - Right: 45°
Dust Collection	Max cutting capacity	0°: 47 mm (1-7/8") 45° right: 30 mm (1-3/16") 15° left: 20 mm (13/16")
Built-in Job Light	Vibration level	1.0 m/s <sup>2</sup> (EN62841-2-5, Mode: Cutting wood)
<b>Standard Equipment:</b> TCT saw blade, Hex wrench, Dust nozzle	Uncertainty (K) for Vibration	1.5 m/s <sup>2</sup> (EN62841-2-5, Mode: Cutting wood)
	Sound pressure level	94 dB(A) (EN62841-2-5)
	Sound power level	102 dB(A) (EN62841-2-5)
	Uncertainty (K) for Noise	3 dB(A) (EN62841-2-5)
	Dimensions (L x W x H) (Battery)	264 x 203 x 246 mm (10-3/8 x 8 x 9-11/16") (BL4040F)
	Net weight (Battery)	3.3 kg (7.3 lbs.) (BL4040F)

Standard equipment and accessories, product appearance and specifications may vary by country or region, and all test results, including work amount per charge and work efficiency, are for reference only and may vary depending on application and operating conditions.

**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



**MakitaSG**



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



**Cordless Circular Saw**  
**HS014G 125mm (4-7/8")**



Max. cutting depth

**47 mm**

No load speed

**6,400 min<sup>-1</sup>**



**Capable of flush cutting**

Max cutting depth

15° left: **20 mm**



# High speed cutting


**BL MOTOR**



## ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

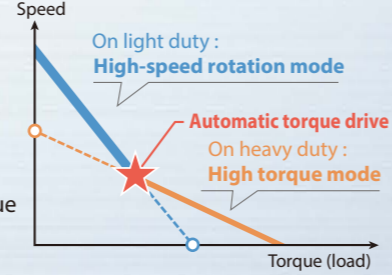


## Compatible with Guide rail

For use with Guide rail, the shape of base is designed to install Guide rail adapter.

## AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

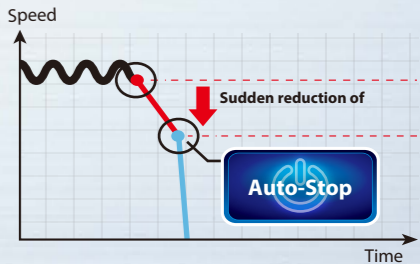

Work amount

**257 cuts\***


\*1 Test material: Merapi 145mm x 300mm  
Bevel angle: 0° cross cutting  
Battery: BL4040F on a full battery charge  
\*Productivity and output vary significantly depending on the hardness of the workpiece and the cutting tool used.

Equipped with an XGT battery, BL motor, and EFFICUT blade, this tool delivers unparalleled power and efficiency.

**EFFICUT**

## Flush cutting capability

(Sub base can be removed without tool)

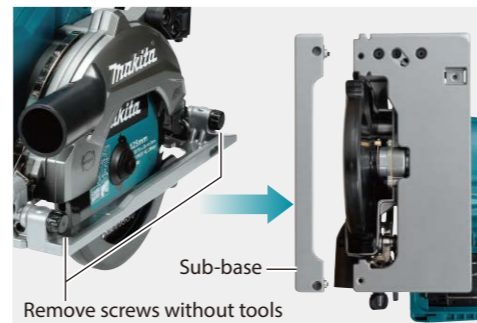


**Remove the sub-base**  
when making flush cuts.



**Hook (Tool hanger)**



**Blower function & LED Job light**  
LED Job light with preglow and afterglow functions

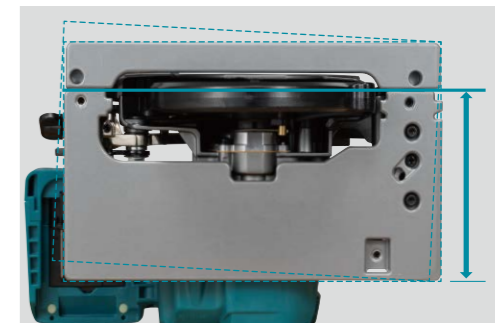

**Supports fine-tuning**  
of the parallelism between the base side and the saw blade



**Safety cover open lever**  
When it is necessary to raise the safety cover, such as for flush cutting, the cover can be opened by manual operation using the lever.



**One-touch depth adjustment**  
is available with the depth scale and lock lever.



**Auto-start Wireless System**  
Connects to a compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



**High water-resistance compatible with XPT<sup>2</sup> (eXtreme Protection Technology)**  
<sup>2</sup>XPT is designed to help protect against dust and water ingress, but complete protection is not guaranteed.

Safety cover open lever