




**High Power**  
**Durability**  
**Digital Communication**



Rotary Hammer  
HR006G



Demolition Hammer  
HM002G

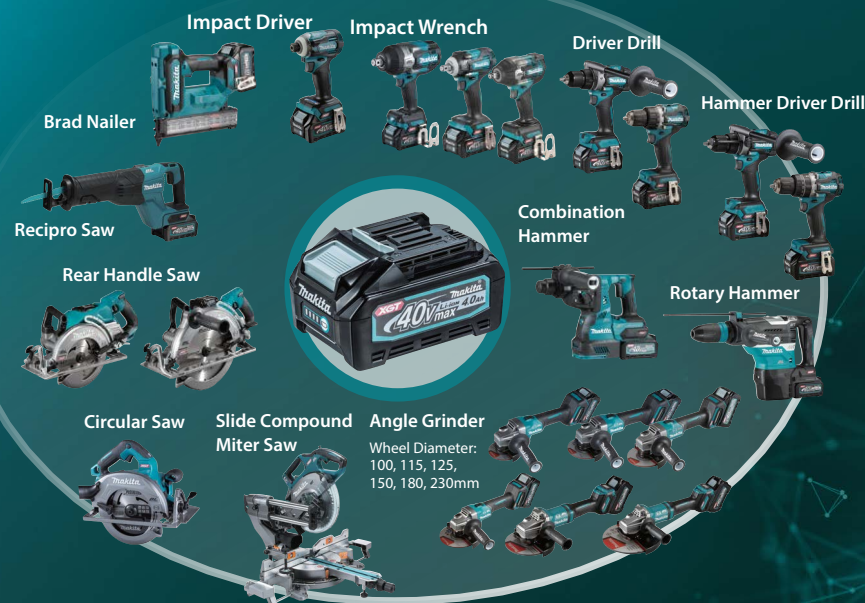

## Portable Power Pack

PDC01


Powered by up to four  
18V LXT batteries



PDC1200



Powered by 36V-40Vmax  
built-in battery



Adapter set (40Vmax)

Part No. 191N62-4



## Accessories

Adapter pipe 85-72 set

Part No. 191L96-5



Extension nozzle set \*

Part No. 197888-8



Flat nozzle set \*

Part No. 197889-6

Narrow profile improves air speed for  
removing heavier debris such as wet leaves



Gutter nozzle set \*

Part No. 191B03-8



End nozzle 80 set

Part No. 191P97-7

For blowing fallen leaves




Shoulder Belt

Part No. 166094-6



\*Use with Adapter pipe 85-72 set (Part No. 191L96-5)

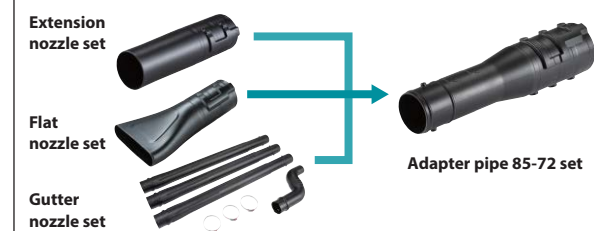

## Cordless Blower UB001G

Variable Speed

Constant Speed

Soft Start

Standard Equipment:

Shoulder Belt, End Nozzle,  
Flat Nozzle, Extension  
Nozzle (country-specific),  
Adapter Pipe  
(country-specific), Battery,  
Charger

Max Air Volume

Cruise Control Mode: 0 - 13.5 m<sup>3</sup>/min  
Boost Mode: 16.0 m<sup>3</sup>/min

Max Air Velocity

Cruise Control Mode: 53 m/s  
Boost Mode: 64 m/s

Blowing Force

Cruise Control Mode: 0 - 12 N  
Boost Mode: 17 N

No Load Speed (RPM)

Cruise Control Mode: 0 - 20,000  
Boost Mode: 23,000

Sound Pressure Level

83.7 dB(A)

Sound Pressure Level

61 dB(A) in 10m range

Sound Power Level

94.1 dB(A)

Vibration Level

2.5 m/s<sup>2</sup> or less

Dimensions (L x W x H)

w/ BL4040: 917 - 1,017 x 167 x 297 mm  
(36 - 40 x 6-9/16 x 11-3/4")

Net weight

3.1 - 3.9 kg (6.8 - 8.6 lbs.)



**Cordless Blower**  
**UB001G**



**40V Li-ion max**

**Lightweight**  
**but**  
**High power**

**Powerful**  
**blowing force**

**Max 17 N\***

\*Boost mode

**Net weight**

**3.1 kg**

with BL4025



**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



**MakitaSG**



VISIT OUR WEBSITE




DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

# High power blowing but less kickback

## Less kickback but powerful blowing

Nozzle is designed so that its end points downward. This small change can displace the reaction force towards the handle side to minimize the return tilting action of the machine, reducing user's arm fatigue.

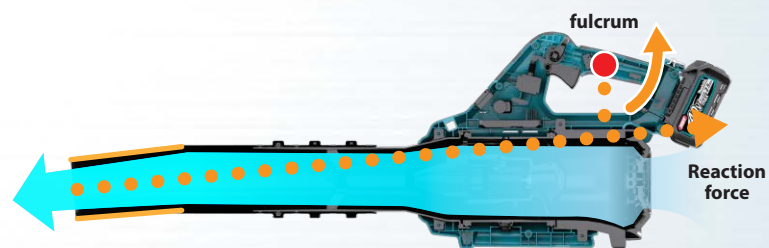

**BL**  
**MOTOR**

### Lightweight design

Improvement in power efficiency makes BL motor more compact and lightweight.


Net weight  
**3.1 kg**  
with BL4025



### Low noise level

Smoother airflow, which is achieved by redesigning the position of controller and the air intake port, decreases noise while increasing blowing force.

Noise level  
at max blowing force  
**59dB**  
ANSI measurement standard

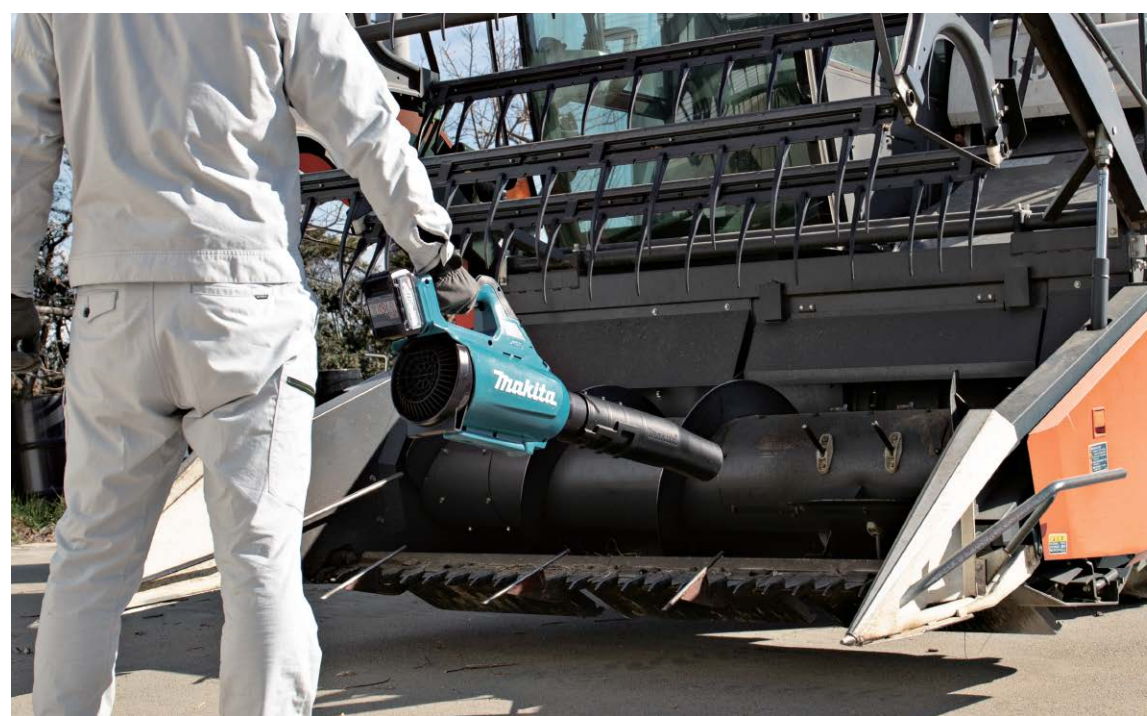

## Boost mode

To use the machine in the Boost mode, pull the switch trigger until the switch trigger stops in the halfway position, and then pull the switch trigger fully.

Blowing Force  
**17N**



Variable speed control  
by trigger

| Available operation time           |                                             |
|------------------------------------|---------------------------------------------|
| Time per run*1<br><b>0.5-5 min</b> | Cumulative operation time*2<br><b>6 min</b> |
| with BL4040                        |                                             |

\*1 Max time per run is at least 30 seconds or longer and depends on usage environment.  
\*2 Total operation time when the machine was intermittently used in Boost mode only.

Usage time of Boost mode is restricted to protect the machine. Available operation time in boost mode, under environment temperature of 25°C

## Variable control trigger + Cruise control lever

Blowing Force  
**0~12N**

### Cruise control lever



Variable speed control  
by trigger

Cruise control lever allows you to lock the variable speed control trigger at a desired power level.

**WG**  
**WET GUARD**



High water-resistance allows to operate the machine even if it is wet with water.

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



Best grip-to-frame angle



Hole on the bottom of housing for hanging

Easy-to-hold machine bottom design for added comfort and control in double handed operation