

Accessories

Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket


Cutter type: CC: Chamfer chisel, MC: Micro chisel



Guide Bar				Saw Chain					Drive sprocket		
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Type	Part No.
30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/0.043"	0.325"LP	80TXL	MC	191T90-5	Sprocket 0.325" LP 7 tooth	191V91-5
35cm/14"	A041		191T87-4	59					191T91-3		
40cm/16"	A041		191T88-2	64					191T92-1		
30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/0.050"	3/8"LP	91PX	CC	191H10-7	Sprocket 3/8" LP 6 tooth	191V90-7
35cm/14"	A041		191G24-0	52					191H11-5		
40cm/16"	A041		191G25-8	56					191H12-3		

Saw chain M43K (Similar to 91PX) Low profile chain blades.

Delivers 10% higher cutting efficiency than the 91PX, with approximately 15% longer cutters for extended use through repeated sharpening. The M43K is a "Yellow Label" saw chain. Not available in certain countries and regions.

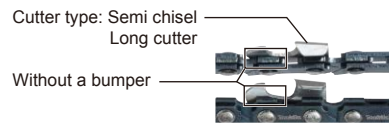


Guide Bar		Saw Chain				Similar Saw Chain				
Bar length	Gauge	Pitch	Type Makita	No. of drive links	Part No. (Carton)	Gauge	Pitch	Type OREGON	No. of drive links	Part No. (Carton)
30cm/12"	1.3mm/0.050"	3/8" (Similar to LP)	M43K	46	1918J9-2	1.3mm/0.050"	3/8"LP	91PX	46	191H10-7
35cm/14"				52	1918K0-7				52	191H11-5
40cm/16"				56	1918K1-5				56	191H12-3

File and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Size	Saw chain type	File		File and File holder	
		Q'ty	Part No.	Part No.	Part No.
4.0mm	M43K, 80TXL 91PX	2	D-67359	D-70948	
		12	D-67365		



Round file bit

6.35mm (1/4) Hex shank (MZ)



Angle plate

25 / 30deg



Size	Round file bit	Angle plate	Angle plate & file bit set
	Part No.	Part No.	Part No.
4.0mm	D-73748	D-75605	D-75611

Flat file and File handle



Flat file		File handle	
Q'ty	Part No.	Q'ty	Part No.
1	D-67452	1	D-67496

Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.



Depth gauge jointer		Flat file	
Part No.		Q'ty	
D-67476		1	D-67452

File set in roll-up pouch

Round File(3pcs) / File Holder/ Flat File / Handle(2pcs) / Depth Gauge set



Round file Size	Part No.
4.0mm	D-72154

Chain oil

Capacity	Part No.
100ml	199897-3
1L	1910U0-9



Charging Time

	DC40RA	DC40RC
*1 BL4040 4.0Ah 191B26-6	45 min	67 min
*1 BL4040/F 4.0Ah 1910N6-8	45 min	67 min
*1 BL4050F 5.0Ah 191L47-8	50 min	85 min
BL4080F/H 8.0Ah F: 191X65-8 H: 1916T7-4	76 min	170 min

*1 Recommended battery

Cordless Chain Saw UC032G	
	Variable Speed
	Brake
	Anti-restart function
	Constant Speed
	Automatic Oiling
	Chain Brake
Guide bar length	300, 350, 400mm (12, 14, 16")
Chain pitch	0.325 / 3/8"
Chain gauge	1.1 / 1.3 mm (0.043 / 0.050")
Oil tank capacity	200 mL (6.8 oz)
Sound pressure level	96 dB (A) (EN62841-4-1)
Sound power level	104 dB (A) (EN62841-4-1)
Uncertainty (K) for Noise	3 dB (A) (EN62841-4-1)
Vibration emission	5.1 m/s² (EN62841-4-1, Mode: Cutting wood)
Uncertainty (K) for Vibration	1.5 m/s² (EN62841-4-1, Mode: Cutting wood)
Dimensions (Battery)	309 - 635 x 193 x 219 mm (12-1/8 - 25 x 7-5/8 x 8-5/8") (BL4040F)
Attachment	w/o Guide bar, Saw chain - 350mm guide bar, Saw chain
Net weight (Battery)	4.1 - 5.1 kg (9.0 - 11.2 lbs.) (BL4040F - BL4080F)
Attachment	350 mm guide bar, 80TXL saw chain

Standard Equipment: Guide bar, Guide bar case, Saw chain, Wrench, Chain oil, Round file

Standard equipment and accessories, product appearance and specifications may vary by country or region, and all test results, including work amount per charge and work efficiency, are for reference only and may vary depending on application and operating conditions.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Cordless Chain Saw (Top-handle) UC032G



Greater cutting efficiency than 35 cc-class chain saws^{*1*2}
with a lightweight design



Lightweight at **4.1 kg**

Battery: BL4040F, Guide bar length: 350 mm, Saw chain: 80TXL

*1 Among professional engine-powered and cordless top-handle chain saws in the 35 cc class, based on our research as of July 2026.

*2 When cutting a ø300 mm cedar log with an 80TXL saw chain and a BL4040F battery.



Excellent maneuverability with a lightweight, optimally balanced design



Lightweight at

4.1 kg

Battery: BL4040F, Guide bar 350 mm
Saw Chain 80TXL

Cutting amount


on a full battery charge

About **25 cuts**

ø300 mm cedar log
Battery: BL4040F, Saw chain: 80TXL

Max. chain speed

25.0 m/s

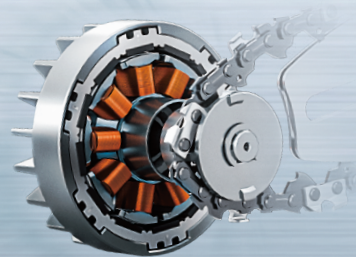

**BL
MOTOR**

High efficiency with
Outer-rotor brushless motor
and Direct-drive system



Engine-like sustained power under load

When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.



Excellent acceleration


Enhanced trigger response provides fast acceleration, enabling efficient continuous and repetitive cutting tasks such as pruning.

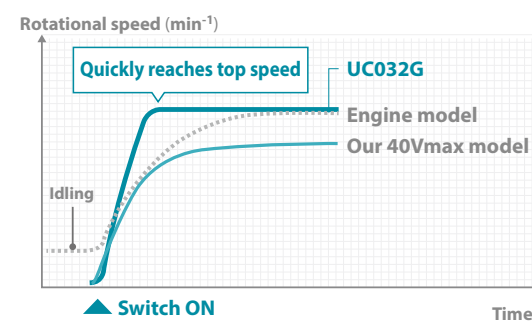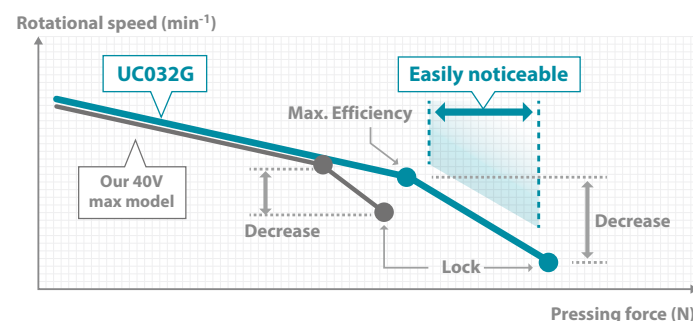

Optimal balance reduces arm strain during horizontal cutting

Excellent restartability (when locked)

If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.

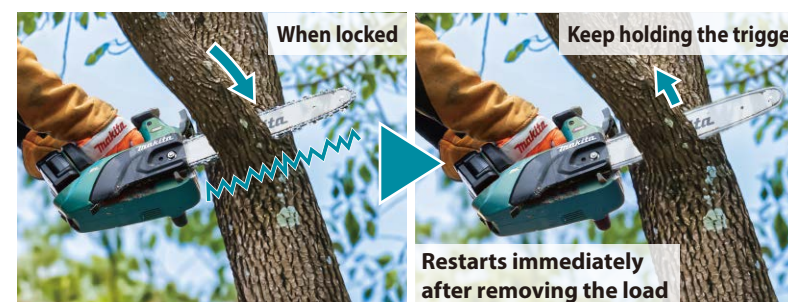

Other features

Easily operable front hand guard

The shorter distance between the front handle and front hand guard makes it easier to release the brake.



Enhanced usability

Redesigned lock-off lever with a release lever and 5-minute auto power-off.

Variable speed trigger

Allows for speed adjustments based on the material or application.

Hook

with quick attachment/ detachment
Allows one-handed attachment to and removal from a carabiner or similar devices.



Adjustable automatic chain lubrication

Captive nut

helps prevent loss of nut when removing sprocket cover to replace the guide bar or saw chain.


Improved chip discharge

reduces chip accumulation inside the sprocket cover for easier maintenance.



Main power button with enhanced operability

Tactile button operation with gloves and clear tool status indicators

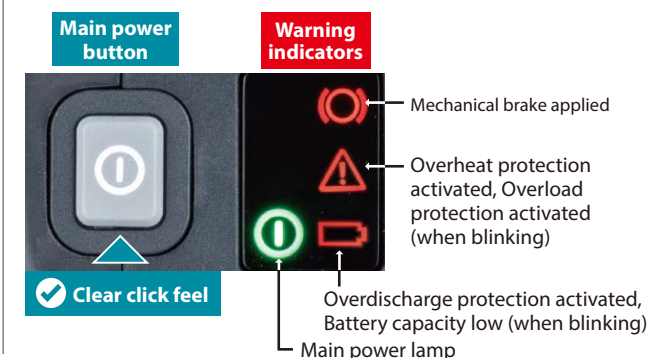

Metal spike bumper



Large retractable oil tank cap Chain oil level window

Compatible Guide bar length

300/ 350/ 400 mm
saw chain type: 80TXL, 91PX

High water-resistance

allows to operate the machine even if it is wet with water.

IPX4

This tool is rated IPX4 for water resistance.

XPT

High water-resistance compatible with eXtreme Protection Technology

