

Comfort/Lifestyle Line up

Cordless Job Site Speaker

DMR203

18V
12V max



DMR202

18V
12V max
USB



Continuous run time (approx): hour

On a single full battery charge

Model No.	MR010G					DMR057							DMR055				
	40Vmax					18V											
Voltage	40Vmax					18V											
Battery	PDC1200	BL4020	BL4025	BL4040	BL4050F	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B
Radio	477	23	28	41	58	15	20	28	40	52	63	15	20	28	40	52	63
Flashlight (H/L)	538/997	26/49	31/58	46/86	66/122	9.0/17	12/23	16/32	23/45	30/58	37/70	-	-	-	-	-	-
Lantern (4 sides/3 sides)	277/380	13/18	16/22	24/33	34/47	4.5/6.5	6.0/8.5	8.5/12	12/17	16/22	19/26	4.5/6.5	6.0/8.5	8.5/12	12/17	16/22	19/26
Radio+Lantern (4 sides)	176	8.5	10	15	21	3.5	4.5	6.5	9.5	12	14	3.5	4.5	6.5	9.0	12	14

Charging Time

Model No.	MR010G		DMR057 / DMR055	
	DC4001	DC40RA / DC40RC	DC18RC	DC18SD
PDC1200	360 min	22 min / 30 min	15 min	30 min
BL4020 2.0Ah	191L29-0	22 min	15 min	30 min
BL4025 2.5Ah	191B36-3	28 min	24 min	45 min
BL4040 4.0Ah	191B26-6	45 min	22 min	60 min
BL4050F 5.0Ah	191L47-8	50 min	45 min	110 min
BL1815N 1.5Ah	196449-1	15 min	55 min	130 min
BL1820B 2.0Ah	197254-9	24 min		
BL1830B 3.0Ah	197599-5	22 min		
BL1850B 5.0Ah	197280-8	45 min		
BL1860B 6.0Ah	197422-4	55 min		

Cordless Radio with Lantern

MR010G / DMR057 / DMR055

	MR010G / DMR057	DMR055
Standard Equipment : Strap Hook	Frequency Band FM: 87.5-108 MHz / DAB: 174.928-239.200 MHz / DAB+: 174.928-239.200 MHz	FM: 87.5-108 MHz / AM: 522-1,710 kHz
Battery and charger are sold separately	Speaker Size Ø57 mm	Ø57 mm
	Illuminance Lantern, Daylight white, 4 sides, High / Low: 145 / 72 or more lx Lantern, Neutral white, 4 sides, High / Low: 140 / 70 or more lx Lantern, Warm white, 4 sides, High / Low: 130 / 65 or more lx Flashlight, High / Low: 1,000 / 500 or more lx	Lantern, Warm white, 4 sides, High: 130 or more lx
	Luminous flux Lantern, Daylight white, 4 sides, High / Low: 310 / 155 or more lm Lantern, Neutral white, 4 sides, High / Low: 300 / 150 or more lm Lantern, Warm white, 4 sides, High / Low: 260 / 130 or more lm Flashlight, High / Low: 200 / 100 or more lm	Lantern, Warm white, 4 sides, High: 260 or more
	Bluetooth Version: 5.0 Profile: A2DP, SCMS-T, AVRCP Supported Codec: MR010G / DMR057: SBC Max Transmission Range (Optimum): 10 m (33 ft) Transmission Power Class: 2 / Compatible Bluetooth Profile: A2DP w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2") MR010G: 1.6 - 2.2 kg (3.5 - 4.9 lbs.) DMR057: 1.3 - 1.6 kg (2.9 - 3.5 lbs.)	
	Dimensions (L x W x H)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
	Net weight	1.2 - 1.6 kg (2.7 - 3.5 lbs.)

Not covered by EPTA-Procedure
Items of standard equipment and specifications may vary by country or area.



photo: MR010G

<p>XGT 40V Li-ion max</p> <p>MR010G</p> <p>Lantern 20 LEDs</p> <p>Flashlight 1 LEDs</p> <p>Light tone and color Daylight white</p> <p>Neutral white</p> <p>Warm white</p>	<p>18V LITHIUM-ION</p> <p>DMR057</p> <p>Lantern 20 LEDs</p> <p>Flashlight 1 LEDs</p> <p>Light tone and color Daylight white</p> <p>Neutral white</p> <p>Warm white</p>	<p>18V LITHIUM-ION</p> <p>DMR055</p> <p>Lantern 20 LEDs</p> <p>Light tone and color Warm white</p>
---	--	--

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG

QR codes for MakitaSG, website, and leaflet.

MakitaSG VISIT OUR WEBSITE DOWNLOAD LEAFLET PRINTED IN SINGAPORE

Bluetooth XPT
▲MR010G / DMR057

XGT
40V^{Li-ion} max

18V^{Li-ion} LITHIUM-ION



photo: MR010G



photo: DMR057



photo: DMR057

Cordless Radio with Lantern that can be used at work, play, or anytime

Lantern with 3 light tone settings

MR010G / DMR057 only



Warm white

You will feel relaxed.
(about 2,500K)

Neutral white

(about 3,500K)


Daylight white

You can easily read what is written / printed.
(about 5,000K)

Switch

MR010G / DMR057

DMR055

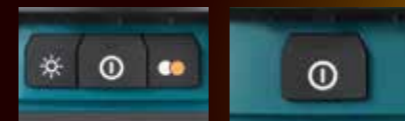

- Brightness setting button (2 stages) (MR010G / DMR057 only)
- Lantern light tone setting button (3 tones) (MR010G / DMR057 only)
- On/off and Mode select button

Foldable hanging hook



Strap with hook allows to illuminate downwards, for example, from the ceiling to the floor

Flashlight

MR010G / DMR057 only



- Daylight white single LED
- Brightness settings (2 stages)

Lens guard also works as an FM antenna.

LCD digital display

Cordless Radio with Lantern

40V ^{Li-ion} max		18V ^{Li-ion} LITHIUM-ION		18V ^{Li-ion} LITHIUM-ION	
	MR010G Bluetooth dab+ XPT ▲ MR009G		DMR057 Bluetooth dab+ XPT ▲ DMR056		DMR055 XPT
Lantern	20 LEDs	Lantern	20 LEDs	Lantern	20 LEDs
Flashlight	1 LEDs	Flashlight	1 LEDs	Flashlight	1 LEDs
Light tone and color	Daylight white Neutral white Warm white	Light tone and color	Daylight white Neutral white Warm white	Light tone and color	Warm white

Continuous run time (approx) On a single full battery charge

MR010G (with BL4050F)				DMR057 (with BL1850B)				DMR055 (with BL1850B)		
Radio	Radio+Lantern	Lantern	Flashlight	Radio	Radio+Lantern	Lantern	Flashlight	Radio	Radio+Lantern	Lantern
51 h	21 h	34 h	66 h	44 h	12 h	16 h	30 h	52 h	12 h	16 h

USB output port

MR010G / DMR057 only

- With USB output switch
- With Auto-off function
- Type A, 1 port, DC5V / 2.4A



Multi functions

MR010G / DMR057

Lantern	Flashlight	FM radio (9 stations)
USB output port	Bluetooth	

DMR055

Lantern	AM / FM radio (9 stations)
---------	----------------------------



XPT