



# MAINTENANCE & OUTDOOR POWER EQUIPMENT CATALOGUE

First Edition





A	
AS001GZ02	78
C	
CF001GZ	69
CF002GZ	69
CF101DZX1	69
CL001GD115(RD/T+B)	15
CL001GD126(RD/T+W)	15
CL001GZ12(Z/T+W)	15
CL001GZ04(Z/T+B)	15
CL002GZ03(ZB)	16
CL002GZ07(ZW)	16
CL003GD114(RDW)	16
CL003GD115(RDB)	16
CL003GZ09(ZB)	16
CL003GZ14(ZW)	16
CL100DW / DZX	17
CL102DWX	17
CL104DWYX	17
CL105DWR / DWX	17
CL106FDSAW / FDZ	17
CL108FDSAW / FDZW	17
CL117FDX2 <b>NEW</b>	17
CW001GZ	70
CW002GZ <b>NEW</b>	70
CW003GZ <b>NEW</b>	70
D	
DAS180Z <b>NEW</b>	78
DCF102ZX1	69
DCF203Z	69
DCF301Z	69
DCL184Z	15
DCL283FRTB / FZB <b>NEW</b>	16
DCL284FRTB / FZB <b>NEW</b>	16
DCL286FRTB / FZB <b>NEW</b>	16
DCM501Z	69
DCU180Z	38
DCU603Z <b>NEW</b>	38
DCU604Z <b>NEW</b>	38
DCU605Z <b>NEW</b>	38
DDG460ZX4	48

D	
DG001GZ02	48
DHW080ZK	49
DKT360Z	70
DLM230RG / Z	46
DLM330RG / Z	46
DLM382CF2 / Z	46
DLM432Z	46
DLM460Z	46
DLM462Z	46
DLM480Z	45
DLM481Z	45
DLM530Z	45
DLM532Z	45
DLM533Z	45
DLM538Z	45
DLM539Z	45
DML805	73
DML806	76
DML807	76
DML809	73
DML810	73
DML811	73
DML812	74
DML813	73
DML814	73
DML815	75
DML816	76
DML817 <b>NEW</b>	77
DMP180Z	78
DMP181Z	77
DMR057 <b>NEW</b>	71
DMR108	71
DMR202	71
DMR300	71
DRC200Z	14
DRC300Z <b>NEW</b>	14
DUA301ZB	36
DUB184Z	31
DUB185Z	32
DUB186Z	31

D	
DUB187Z <b>NEW</b>	31
DUB361Z	31
DUB362Z	31
DUB363ZV	31
DUC254Z	35
DUC306ZB	34
DUC353ZB	34
DUC355Z	34
DUC357ZX4 <b>NEW</b>	35
DUH502Z	39
DUH506Z <b>NEW</b>	39
DUH507F001 / Z <b>NEW</b>	40
DUH523Z	40
DUH601Z	39
DUH604SZ	39
DUH606Z <b>NEW</b>	39
DUH651Z	39
DUH751Z	39
DUH754SZ	39
DUM111SYX	41
DUM604SF / Z	41
DUN461WSF / WZ	40
DUN500WZ	40
DUN600LZ	40
DUP361ZN	47
DUR181Z	43
DUR189Z	43
DUR190LZX3	42
DUR193SF / Z	43
DUR194SFX2	43
DUR368LZ	42
DUR369LZ	42
DUS054Z	47
DUS108Z <b>NEW</b>	47
DUS158Z <b>NEW</b>	47
DUX18Z	33
DUX60Z	33
DVC150LZ	11
DVC153LZ	11
DVC154LZ	11



# Li-ion Battery & Charger Time Reference, Compatibility Chart

40Vmax		18V		DC40RC (191M92-9)	DC40RA + ADP10 (191C11-5) Compatible with LXT Li-Ion batteries	DC40RC + ADP10 (191C11-5) Compatible with LXT Li-Ion batteries	DC18RC (195586-8) 110V - (195582-6) DC18RD* (196934-4) DC18RE** (198446-3)	DC18SD (194534-4) DC18SH* DC18SE (Automotive) (194621-9)
40Vmax Lithium-ion <b>XGT</b>	8.0Ah BL4080F (191X65-8)	76min.	170min.	-	-	-	-	
	5.0Ah BL4050F (191L47-8)	50min.	85min.	-	-	-	-	
	4.0Ah BL4040F (191N06-8) BL4040 (191B26-6)	45min.	67min.	-	-	-	-	
	2.5Ah BL4025 (191B36-3)	28min.	38min.	-	-	-	-	
	2.0Ah BL4020 (191L29-0)	22min.	30min.	-	-	-	-	
18V Lithium-ion <b>LXT</b>	6.0Ah BL1860B (197422-4)	-	-	40min.	85min.	55min.	130min.	
	5.0Ah BL1850B (197280-8)	-	-	35min.	70min.	45min.	110min.	
	4.0Ah BL1840B (197265-4)	-	-	29min.	58min.	36min.	90min.	
	3.0Ah BL1830B (197599-5)	-	-	22min.	42min.	22min.	60min.	
	2.0Ah BL1820B (197254-9)	-	-	24min.	33min.	24min.	45min.	
	1.5Ah BL1815N (196449-1)	-	-	15min.	22min.	15min.	30min.	
12Vmax Lithium-ion <b>CXT</b>	4.0Ah BL1041B (197406-2)	60min.	130min.	PDC1200	360min.	PDC01	Powered by up to four 18V LXT Batteries	
	2.0Ah BL1021B (197396-9)	30min.	70min.					
	1.5Ah BL1016 (197393-5)	22min.	50min.					
64Vmax Lithium-ion	10.0Ah BL64100 (191Y69-6)	300min.	10.8V Lithium-ion	1.3Ah BL1013 (196066-7)	50min.	18V Lithium-ion	1.5Ah BL1815G (198186-3)   BL1415G (198192-8)	70min.
	4.0Ah BL6440 (191R06-8)	120min.	7.2V Lithium-ion	1.5Ah BL0715 (198000-3)	35min.	14.4V Lithium-ion	2.0Ah BL1820G (191N69-0)	90min.

\* DC40RB / DC18RD / DC18SH: Two Port Multi Fast Charger \*\* DC18RE: CXT & LXT Dual port Fast Charger

## Makita Cordless Part Number Breakdown

<b>DSE</b>	Charger (DC10WA), 2X7.2V - 1.0Ah Batteries (BL7010)	
<b>DW</b>	Charger (DC10WA), 1X10.8V - 1.3Ah Battery (BL1013)	
<b>DWE</b>	Charger (DC10WA), 2X10.8V - 1.3Ah Batteries (BL1013)	
<b>DWYE</b>	Standard Charger (DC10WD), 2X12Vmax - 1.5Ah Batteries (BL1016)	
<b>DSYE</b>	Fast Charger (DC10SB), 2X12Vmax - 1.5Ah Batteries (BL1016)	
<b>DSAE</b>	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B)	
<b>DSAJ</b>	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B), Makpac	
<b>DSME</b>	Fast Charger (DC10SB), 2X12Vmax - 4.0Ah Batteries (BL1041B)	
<b>SYE</b>	Standard Charger (DC18SD), 2X18V - 1.5Ah Batteries (BL1815B)	
<b>RYE</b>	Rapid Charger (DC18RC), 2X18V - 1.5Ah Batteries (BL1815B)	
<b>SF</b>	Standard Charger (DC18SD), 1X18V - 3.0Ah Battery (BL1830B)	
<b>RF</b>	Rapid Charger (DC18RC), 1X18V - 3.0Ah Battery (BL1830B)	
<b>RFE/RF2</b>	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B)	
<b>RFJ</b>	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B), Makpac	
<b>RME</b>	Rapid Charger (DC18RC), 2X18V - 4.0Ah Batteries (BL1840B)	
<b>RTE/RT2</b>	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B)	
<b>RTJ</b>	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
<b>PT2</b>	Dual Port Rapid Charger (DC18RD), 2X18V - 5.0Ah Batteries (BL1850B)	
<b>PG2J</b>	Dual Port Rapid Charger (DC18RD), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
<b>G2</b>	2X18V - 6.0Ah Batteries (BL1860B)	

### Makita Coding System - Ending Alphabet

**DDF484 R T E**

#### Charger

**S** - Standard Charger  
**R** - Rapid (Fast) Charger  
**P** - Two Port Charger

#### Come with Battery

**H** - 1.3Ah    **M** - 4.0Ah  
**Y** - 1.5Ah    **T** - 5.0Ah  
**A** - 2.0Ah    **G** - 6.0Ah  
**D** - 2.5Ah    **L** - 8.0Ah  
**F** - 3.0Ah

Comes with  
2 batteries

**Other:**  
**B** - Double Insulation  
**C** - Electronic Control  
**F** - LED Light  
**K** - Carrying Case  
**2** - 18V x 2 Tools

**Z**

Tool come with  
carton box only

**XGT**

# 40V Li-ion max

High Power

Durability

Digital Communication



**XGT**  
40V Li-ion max

**XGT X2**  
80V max



Rotary Hammer



Demolition Hammer



Power Cutter



Grass Trimmer



Vacuum Cleaner

## Battery

BL4020  
2.0Ah

BL4025 /  
BL4025F  
2.5Ah

BL4040 /  
BL4040F  
4.0Ah





Impact Driver

Driver Drill

Hammer Driver Drill

Rotary Hammer

Demolition Hammer

Combination Hammer

Brad Nailer

Air Compressor

Angle Drill

Mixer

Concrete Vibrator

Impact Wrench

Rear Handle Saw

Polisher

180+ TOOLS

Angle Grinder

Circular Saw

Plunge Cut Saw

Slide Compound Miter Saw



Backpack Vacuum Cleaner

Recipro Saw

Metal Cutter

Jig Saw

Planer

Portable Band Saw

Trimmer

Vacuum Cleaner

Cleaner

Charger

BL4050F 5.0Ah

BL4080F 8.0Ah

DC40RA

DC40RB

DC40WA

DC40RC

ADP10



Adapter for LXT Battery

# 18V LITHIUM-ION



18V Lithium-ion

# LXT

18V  
LITHIUM-ION

Vacuum Pump

Worklight

Flashlight

Fan Jacket

Fan Vest

Hedge Trimmer

Wheelbarrow

Heat Gun

Rebar Tying Tool

Worklight

Area Worklight

Heated Vest

Heated Base Layer Shirt

Heated Jacket

Hedge Trimmer

Hedge Trimmer

Hedge Trimmer

Hedge Trimmer

Hedge Trimmer

Hedge Trimmer

Hedge Trimmer

Caulking Gun

Rivet Gun

LED Flashlight

Radio with Lantern

Coffee Maker

Job Site Radio

Lawn Mower

Heated Blanket

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Wall Scanner

Stapler

Concrete Vibrator

Hole Puncher

Grease Gun

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Slide Compound Miter Saw

Pin Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower

Pruning Saw

String Trimmer

Multi Function Power Head

Grass Trimmer

Cleaner

Rotary Hammer

Combination Hammer

Pin Nailer

Finish Nailer

Hole Puncher

LED Worklight

Radio with Lantern

Job Site Radio

Lawn Mower

Garden Sprayer

Dust Blower





Chain Saw

Pole Saw

Grass Trimmer

Pruning Shears

Lawn Mower

Earth Auger

Vacuum Pump

High Pressure Washer

Wheelbarrow

Portable Power Pack

Impact Wrench

Blower

Hedge Trimmer

Screwdriver

Vacuum Cleaner

Kettle

4 Mode Impact Driver

Multi Function Power Head

Auto Feed Screwdriver

Mixer

Driver Drill

18V x2

Angle Drill

Angle Impact Wrench

Oil-Pulse Driver

Impact Driver

420+ TOOLS

6.0Ah 5.0Ah 4.0Ah 3.0Ah 2.0Ah 1.5Ah

Angle Impact Driver

Ratchet Wrench

Hammer Driver Drill

Rotary Hammer

Multi Tool

Steel Rod Cutter

Power Scraper

Combination Hammer

Recipro Saw

Metal Shear

Compact Cut Off

Metal Cutter

Circular Saw

Die Grinder

Nibbler

Threaded Rod Cutter

Cutter

Slide Compound Miter Saw

Sander Polisher

Finishing Sander

Random Orbit Sander

Random Orbit Polisher

Portable Band Saw

Jig Saw

Drywall Sander

Angle Grinder

Compound Miter Saw

Expand Your Lithium Line Up



**Makita**<sup>®</sup>

**CLEANING EQUIPMENT**

**VC006GMZ03 (Wet & Dry) Cordless Vacuum Cleaner** **New**

80Vmax XGT BL AWS Cordless 40L Dust Class M GYUPPA Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dust/Water: 40/30L
Max Air Flow	w/Hose 28-3.5: 2.0 m³/min w/Hose 38-2.5: 3.7 m³/min
Max Sealed Suction	18 kPa
Suction Power	350 W
Dimensions (L x W x H)	586 x 385 x 598 mm (23 x 15-1/8 x 23-1/2")
Net weight	18.4 - 20.8 kg (40.6 - 45.9 lbs.)

40Vmax x2



Floor nozzle, Straight pipe, Bent pipe, Hose, Dust bag, Corner nozzle, Front cuffs (22, 24), Wireless unit, Cap, Joint, Battery, Charger, Z: Battery and Charger are sold separately



**VC003GLZ (Wet & Dry) Cordless Vacuum Cleaner**

40Vmax BL Cordless 15L Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dust/Water: 15/12L
Continuous Use (min.)	BL4050F x2: 220
Max Air Flow	3.2 m³/min
Max Sealed Suction	23 kPa
Suction Power	310 W
Dimensions (L x W x H)	366 x 334 x 475 mm (14-3/8 x 13-1/8 x 18-3/4")
Net weight	8.3 - 10.2 kg (18.3 - 22.5 lbs.)

40Vmax



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

**VC004GLZ (Dry) Cordless Vacuum Cleaner**

40Vmax BL AWS Cordless 15L HEPA GYUPPA Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dust: 15L
Continuous Use (min.)	BL4050F x2: 220
Max Air Flow	1.8 m³/min
Max Sealed Suction	23 kPa
Suction Power	205 W
Dimensions (L x W x H)	366 x 334 x 475 mm (14-3/8 x 13-1/8 x 18-3/4")
Net weight	8.5 - 10.4 kg (18.7 - 22.9 lbs.)

40Vmax



Powder Filter H Set, Damper Set, Pre Filter Set, Hose (38mm-2.5m), Cuff Lock, Stopper, Sleeve, Front cuffs (38, 22, 24) Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

**DVC153LZ (Dry) Cordless Vacuum Cleaner**

HEPA Filter is used to capture very fine particles effectively

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust/Water: 15/N/AL
Max Air Flow	2.1 m³/min
Max Sealed Suction	9.8 kPa
Suction Power	90 W
Vibration Level	2.5 m/s² or less
Sound Pressure Level	66 dB(A)
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	8.0 - 8.6 kg (17.6 - 19.0 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Hose (28mm-3.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

**DVC154LZ (Dry) Cordless Vacuum Cleaner**

Auto-Start Wireless System (AWS) Connects to Power Tool with Bluetooth

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust/Water: 15/N/AL
Max Air Flow	2.1 m³/min
Max Sealed Suction	9.8 kPa
Suction Power	90 W
Vibration Level	2.5 m/s² or less
Sound Pressure Level	66 dB(A)
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	8.0 - 8.6 kg (17.6 - 19.0 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

**DVC150LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner**

Powered by AC and Two 18V Li-Ion Batteries in Series

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust/Water: 15/12L
Max Air Flow	AC/DC: 3.6/2.1 m³/min
Max Sealed Suction	AC/DC: 24/9 kPa
Suction Power	AC/DC: 320/25 - 70 W
Vibration Level	2.5 m/s² or less
Sound Pressure Level	75 dB(A)
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	8.9 - 9.6 kg (19.7 - 21.1 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DVC155LZX2 (Wet & Dry) Cordless Vacuum Cleaner**

18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust/Water: 15/12L
Max Air Flow	2.1 m³/min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	7.2 - 7.9 kg (16.1 - 17.4 lbs.)

18V x2



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

### DVC860LZ (Wet & Dry)

Corded and Cordless Vacuum Cleaner

8L Large dust bag capacity enables continuous cleaning work

353

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust/Water: 8 / 6 L
Continuous Use (min.)	With BL1850B x 2: 65
Max Air Flow	AC / DC: 3.6 / 2.1 m <sup>3</sup> / min
Max Sealed Suction	AC / DC: 24 / 9 kPa
Suction Power	AC / DC: 320 / 25 - 70 W
Dimensions (L x W x H)	366x334x368mm (14-3/8"x13-1/8"x14-1/2")
Net weight	8.6 kg (19.0 lbs)

18V x2



DVC860L: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), Z: Battery and Charger are sold separately

### DVC865LZX2 (Wet & Dry)

Cordless Vacuum Cleaner

18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust/Water: 8 / 6 L
Max Air Flow	2.1 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	7.0 - 7.7 kg (15.7 - 17.0 lbs)

18V x2



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

### DVC867LZX4 (Dry) Cordless Vacuum Cleaner

18V X2 (36V) LXT BL AWS Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Dry only)

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust/Water: 8 / - L
Max Air Flow	2.4 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	110 W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	7.7 - 8.4 kg (17.2 - 18.5 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

### DVC560PG2 / Z Cordless Upright Cleaner

18V X2 (36V) LXT BL Brushless Cordless 5 L HEPA Upright Cleaner

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust: 5 L
Continuous Use (min.)	w/ BL1860B x2 Max / Normal / Low Noise: 30 / 60 / 120
Max Air Flow	1.9 m <sup>3</sup> /min
Max Sealed Suction	12 kPa
Suction Power	Max / Normal / Low Noise: 85 / 50 / 25 W
Cleaning Width	318 mm
Brushroll Rotation Speed	Max / Normal / Low Noise: 3,500 / 2,500 / 1,000 RPM
Dimensions (L x W x H)	326 x 318 x 1,146 mm (12-7/8" x 12-1/2" x 45")
Net weight	8.3 - 9.0 kg (18.3 - 19.8 lbs.)

18V x2



Long Sash Nozzle, Round Brush, Filter Bag, Filter H, Filter Bag Set, Z: Battery and Charger are sold separately

## Cordless Upright Cleaner

DVC560

## Ideal for carpet cleaning

Max air flow

1.9 m<sup>3</sup>/min

Max Sealed Suction

12 kPa

Continuous use on a full battery charge\*

Max about  
30 min

High about  
60 min


Low noise about  
120 min

\*with BL1860B x2

18v + 18v → 36V




## High dust pick-up rate



4 rows of V-shaped bristle increase dust pick-up rate.



Suction power is even across the entire cleaning width due to the suction port located at the center.



vacuuming dust

rotating brushroll

## Two different BL motors

- One for vacuuming dust and the other for rotating brushroll
- Two motors are separately controlled according to the selected suction mode.

+

allows for use in noise-sensitive environments such as office, hospital and more.

Low noise mode

57 dB(A)

Max mode: 67dB(A) / Normal mode: 64dB(A)

## 4-stage brushroll height adjustment

4-stage manually adjustable to carpet pile length



Stage 4  
Long pile carpet

Stage 1  
Hard floor, Short pile carpet

Stage*	Application (length as a rough guide, depending on conditions)
4	Long pile carpet (10mm or longer)
3	Standard carpet (approx 7mm)
2	Modular carpet (approx 3mm)
1	Hard floor, Short pile carpet

\* Brief description

- The lower the brushroll position, the higher the dust removal performance.
- The higher the brushroll position, the less the force required to move the cleaner head. (The height should be adjusted so that the brushroll error lamp is not activated.)

## Main body able to tilt up to 90 degrees

enables to clean in tight spaces under furniture, sofa, bed and more.





**For Cleaning** VC008G



**For Dust Collecting** VC009G



**HEPA filter**

HEPA Filter is used as the main filter to capture very fine particles effectively.

**Able to capture 99.97% of particles as small as 0.3-1 μm**



**Loop**

The loop on the lower belt can be used for carrying nozzles as illustrated.



**Anti-forgetting mechanism for paper dust bag installation**

When the filter bag/dust bag is not installed in the cleaner, the front cover does not close completely.



**Carrying hook**

With a handle convenient for carrying



**Comfortable harness designed to reduce stiffness of shoulders, back and waist**

Mesh material is used for the back surfaces that touch shoulders, back and waist, reducing stuffy feeling.



	<b>Max Air Flow</b>	
VC008G	VC009G	
<b>2.4 / 1.9 m<sup>3</sup>/min</b>		

<b>Max Sealed Suction</b>
<b>18 kPa</b>

**VC008GZ04 Cordless Backpack Vacuum Cleaner**

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner



40Vmax Floor Nozzle, Hose, Hose Band, Nozzle, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuff (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

Capacity	Paper Dust Bag: 2.0L Cloth Dust Bag: 1.5L
Max Air Flow	2.4 m <sup>3</sup> /min
Max Sealed Suction	18 kPa
Suction Power	w/ Hose 32-1.0 (Max): 180 W
Dimensions (L x W x H)	233 x 151 x 376 mm (9-1/8 x 5-15/16 x 14-3/4")
Net weight	4.3 - 4.7 kg (9.5 - 10.4 lbs.)

**VC009GZ Cordless Backpack Vacuum Cleaner**

40Vmax XGT BL AWS Cordless HEPA Backpack Vacuum Cleaner



40Vmax Hose, Hose Band, Dust Bag, Front Cuff (country-specific), Wireless Unit, Battery, Charger, Z: Battery and Charger are sold separately

Capacity	Paper Dust Bag: 2.0L Cloth Dust Bag: 1.5L
Max Air Flow	1.9 m <sup>3</sup> /min
Max Sealed Suction	18 kPa
Suction Power	w/ Hose 28-1.5, Max / High / Normal: 165 / 85 / 45
Dimensions (L x W x H)	233 x 151 x 376 mm (9-1/8 x 5-15/16 x 14-3/4")
Net weight	4.3 - 4.7 kg (9.5 - 10.4 lbs.)

**DVC660ZX7 Cordless Backpack Vacuum Cleaner**

18V X2 (36V) LXT BL Brushless HEPA Cordless Backpack Vacuum Cleaner



18V x2 Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger, Z: Battery and Charger are sold separately

Capacity	Paper Dust Bag: 6.0L Cloth Dust Bag: 5.5L
Max Air Flow	w/ Hose complete 32-1.0: 2.2 m <sup>3</sup> /min w/ Hose Complete 28-1.0: 2.0 m <sup>3</sup> /min
Suction Power	Max / High / Normal w/ Hose 32-1.0: 95 / 50 / 25 W Max / High / Normal w/ Hose 28-1.0: 90 / 45 / 25 W
Vibration Level	Operation w/o Load: 2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	297x174x523 mm (11-3/4"x6-7/8"x20-5/8")
Net weight	6.1 - 6.7 kg (13.4 - 14.8 lbs.)

**DVC665Z Cordless Backpack Vacuum Cleaner**


18V X2 (36V) LXT BL AWS HEPA Cordless Backpack Vacuum Cleaner



18V x2 Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger, Z: Battery and Charger are sold separately

Capacity	Paper Dust Bag: 6.0L Cloth Dust Bag: 5.5L
Max Air Flow	w/ Hose Complete 28-1.5: 1.8 m <sup>3</sup> /min
Suction Power	High / Normal w/ Hose 28-1.5: 85 / 45 W
Vibration Level	Operation w/o Load: 2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	297x174x523 mm (11-3/4"x6-7/8"x20-5/8")
Net weight	6.1 - 6.7 kg (13.5 - 14.9 lbs.)

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

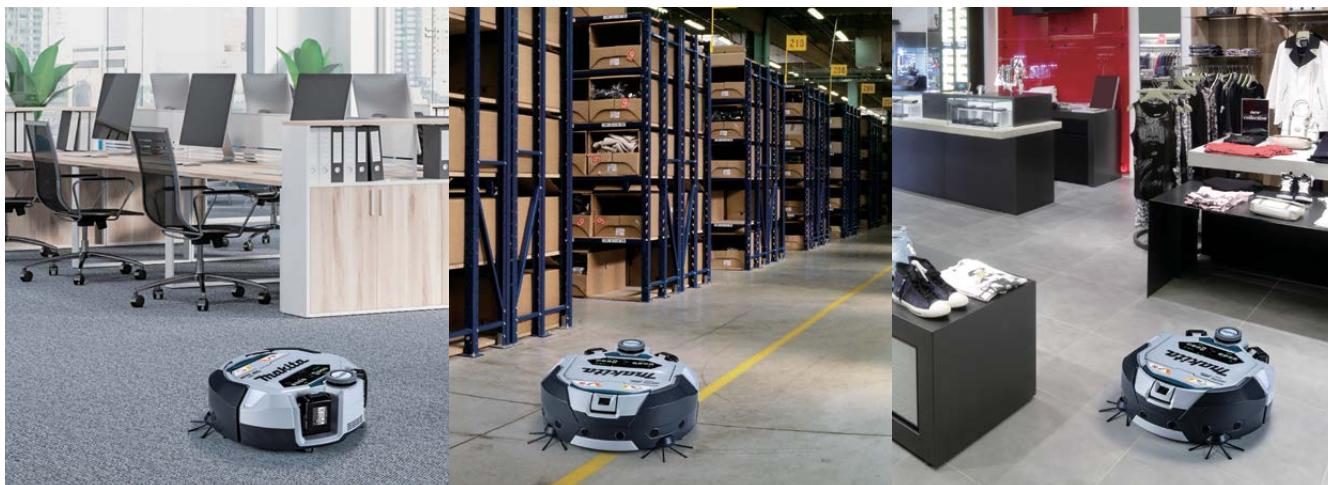

Equipped with LiDAR sensor (2D) and Camera sensor, the cleaner can map and memorize the rooms to clean.


LiDAR sensor



Camera sensor



Maximum cleaning area 600m<sup>2</sup> with mapping feature

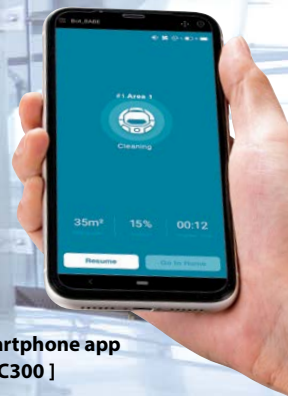

Compatible with Smartphone app [ Makita RoboPro DRC300 ]



Photo: DRC300

**BL MOTOR**  
**HEPA filter**

Continuous run time (approx.) on a full battery charge

**240 min**

[with two BL1860B batteries]

**DRC300Z** Robotic Cleaner

New

18 V LXT BL Brushless Robotic Cleaner w/ Mapping Function

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Continuous Use (min.)	w/ BL1860B x2: 240
Max cleaning area	w/ BL1860B x2: 600 m <sup>2</sup>
Max running speed	0.3 m/sec
Dust Box Capacity	3.0 L
Dimensions (L x W x H)	500 x 500 x 204 mm (19-3/4 x 19-3/4 x 8")
Net weight	9.6 - 10.6 kg (21.2 - 23.4 lbs.)

18V x2



Wireless remote controller (including two AAA alkaline batteries), Side Brush, Z: Battery and Charger are sold separately

**DRC200Z** Robotic Cleaner

Provides easy maneuverability anywhere you need cleaning

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Continuous use (minutes)	BL1850Bx2: 200
	BL1830Bx2: 120
Max. cleaning area	BL1850Bx2: 500m <sup>2</sup>
	BL1830Bx2: 300m <sup>2</sup>
Max. running speed	0.3 m/sec
Dust box capacity	2.5L
Dimensions (L x W x H)	460x460x180mm (18-1/8" x 18-1/8" x 7-1/8")
Net weight	7.8kg (16.1lbs)

18V x2



Wireless remote controller (including two AAA alkaline batteries), Side brush, Boundary tape (15m roll), Z: Battery and Charger are sold separately

**DVC750LZX1** Cordless Portable Vacuum Cleaner

Compact, portable and easy-to-use

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water : 7.5 / 4.5 L
Continuous Use (min.)	w/ BL1850B (High) : 30
	w/ BL1850B (Normal) : 60
Max Air Flow	1.3 m <sup>3</sup> /min
Max Sealed Suction	6.7 / 4.2 kPa
Suction Power	High / Low : 50 / 25 W
Dimensions (L x W x H)	418x251x278 mm (16-1/2"x9-7/8"x11")
Net weight	4.3 - 4.6 kg (9.4 - 10.1 lbs.)

18V



Hose, Floor Nozzle, Sash Nozzle, Z: Battery and Charger are sold separately

**DCL184Z Cordless Cleaner**

18V LXT Li-Ion Cordless 3-Speed Cleaner

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Cloth / Paper Dust Bag: 500 / 330 mL
Continuous Use (min.)	Max / High / Normal: 33 / 50 / 133
Max Air Flow	Cleaning: 1.4 m <sup>3</sup> /min Blowing: 0.8 m <sup>3</sup> /min
Max Air Velocity	Blowing: 7.2 m/s
Max Sealed Suction (water column)	5.4 kPa (550 mmH <sub>2</sub> O)
Noise Level	Max / High / Normal: 68 / 65 / 58 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 365x138x202 mm (14-3/8"x5-7/16"x8")
Net weight	1.8 - 2.2 kg (4.0 - 4.9 lbs.)

18V

Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately




**Automatic self-cleaning filter**

VC2510L, VC3210L

obtained by Triple filter structure composed of:  
**Powder filter + Damper + Prefilter**

- When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power
- When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter

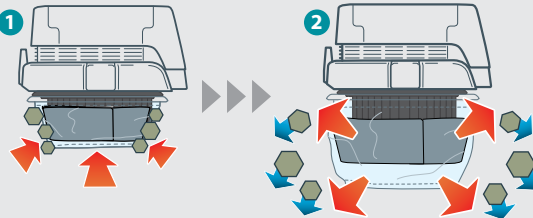

Allows for: **Constantly high suction power** **Easy filter cleaning simply by tapping dust off of Prefilter** **Quiet cleaning because Damper and Prefilter make no noise**

**VC3210L Vacuum Cleaner (Wet & Dry)**

Complying with dust class L

173

110V   
**VC3210L/B**



Continuous Rating Input	1,050W
Max Peak Air Ow	2.0m <sup>3</sup> / min
Max Sealed Suction (Water Column)	22.0 kPa (2,240 mmH <sub>2</sub> O)
Tank Capacity	Dust: 32 L Water: 27 L
Dimensions (L x W x H)	552x398x685mm (21-3/4"x15-5/8"x27")
Net Weight	14.5kg (32.0lbs)
Power Supply Cord	5.0m (16.4ft)

Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Poly Bag Set

**VC2510L Vacuum Cleaner (Wet & Dry)**

Complying with dust class L

173



Continuous Rating Input	1,050W
Max Peak Air Ow	2.0m <sup>3</sup> / min
Max Sealed Suction (Water Column)	22.0 kPa (2,240 mmH <sub>2</sub> O)
Tank Capacity	Dust: 25 L Water: 14 L
Dimensions (L x W x H)	432x416x451mm (17"x16-3/8"x17-3/4")
Net Weight	10.5kg (23.2lbs)
Power Supply Cord	5.0m (16.4ft)

Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Plastic Dust Bag Set

**VC2000L Vacuum Cleaner (Wet & Dry)**

Wet & Dry L-class Vacuum Cleaner



Continuous rating Input	1,000W
Max. peak air flow	216 m <sup>3</sup> / h
Max. sealed suction	21kPa
Tank capacity	Dust: 20L Water: 13L
Dimensions (L x W x H)	375x 385 x 505mm (14-7/6" x 15-1/5" x 19-8/8")
Net Weight	7.5kg (16.5lbs)
Power supply cord	5.0m (16.4ft)

Filter Bag - Fleece, Disposal Bag - Plastic, Suction Hose, Suction Tube, Hand tube, Floor Nozzle, Nozzle Universal, Crevice Nozzle

**CL001GD115(RD/T+B) / GD126(RD/T+W) / GZ04(Z/T+B) / GZ12(Z/T+W) Cordless Cleaner**

40Vmax XGT BL Brushless Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	730 mL
Continuous Use (min.)	w/ BL4040, 1 / 2 / 3 / 4: 128 / 64 / 40 / 25
Max Air Flow	1.2 m <sup>3</sup> /min
Max Sealed Suction (water column)	21 kPa (2,100 mmH <sub>2</sub> O)
Suction Power	w/ Easy Shake Off Filter, 1 / 2 / 3 / 4: 20 / 45 / 70 / 125 W
Dimensions (L x W x H)	w/ BL4020 / BL4025: 1,066 x 113 x 152 mm w/ BL4040: 1,081 x 113 x 152 mm
Net weight	1.7 - 2.3 kg (3.5 - 5.1 lbs.)

40Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Battery, Charger, Z: Battery and Charger are sold separately

**CL002GZ03(ZB) / GZ07(ZW) Cordless Cleaner**

40Vmax XGT BL Brushless Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dust Bag: 500 mL Paper Pack: 330 mL
Continuous Use (min.)	w/BL4025, 1/2/3/4: 80/40/25/16
Max Air Flow	1.2 m <sup>3</sup> /min
Max Sealed Suction (water column)	21 kPa (2,100 mmH <sub>2</sub> O)
Suction Power	125 W w/Easy Shake Off Filter, 1/ 2/3/4: 20/45/70/125 W
Dimensions (L x W x H)	505 x 114 x 152 mm (19-7/8 x 4-1/2 x 6")
Net weight	1.8 - 3.0 kg (4.0 - 6.6 lbs.)

40Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Easy Shake Off Dust Bag, Paper Dust Bag, Hand Strap, Battery, Charger, Z: Battery and Charger are sold separately

**CL003GD115(RDB) / GD114(RDW) / GZ09(ZB) / GZ14(ZW) Cordless Cleaner**

40Vmax XGT BL Brushless Cordless Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	250 mL
Continuous use	w/BL4025, Mode 1/2/3/ 4: 80/40/25/16 min
Max air flow	1.0 m <sup>3</sup> /min
Max sealed suction	20 kPa (2,000 mmH <sub>2</sub> O)
Suction power	w/Easy shake off filter EX, Mode 1/2/3/4: 15/35/60/100 W
Noise level	Mode 1/2/3/4: 54/59/62/65 dB(A)
Dimensions (L x W x H)	w/Pipe & Nozzle, w/ BL4040: 1,121 x 113 x 177 mm (44-1/4 x 4-7/16 x 7")
Net weight	1.9 - 2.5 kg (4.2 - 5.5 lbs.)

40Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Z: Battery and Charger are sold separately




Low noise  
**54** [Mode 1] dB(A)  
[Mode 4: 65 dB(A)]

Photo: CL003G

**New cyclone unit**

Filter clogging is suppressed by separating fine dust particles from the air with centrifugal force in the cyclone unit. Thus, the decrease in suction power of the cleaner is minimized.

**4-mode suction power selection with mode memory function**



**Easy disposal of the fine dust collected in dust case**



Dust capacity  
**250 mL**



**DCL286FRTB / FZB Cordless Cleaner**

New

18V LXT BL Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Dust collecting type	Cyclone
Capacity	250 mL
Max Air Flow	1.0 m <sup>3</sup> /min
Max Sealed Suction	18 kPa
Suction power	w/ High performance filter, Mode 1/2/3/4: 15W/35W/60W/100W
Dimensions (L x W x H)	543 x 113 x 177 mm (21-3/8 x 4-7/16 x 7")
Net weight	1.6 - 1.9 kg (3.5 - 4.2 lbs.)

18V

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, High performance filter (country-specific), Z: Battery and Charger are sold separately

**DCL283FRTB / FZB Cordless Cleaner**

New

18V LXT BL Cordless Cleaner with LED Light

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	730 mL
Max Air Flow	1.1 m <sup>3</sup> /min
Max Sealed Suction	17.5 kPa
Suction power	90 W
Dimensions (L x W x H)	503 x 113 x 154 mm (19-3/4 x 4-7/16 x 6-1/8")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance dust bag, Battery, Charger, Z: Battery and Charger are sold separately

**DCL284FRTB / FZB Cordless Cleaner**

New

18V LXT BL Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	730 mL
Max Air Flow	1.2 m <sup>3</sup> /min
Max Sealed Suction	18 kPa
Suction power	w/ High performance filter, Mode 1/2/3/4: 20W/45W/70W/125W
Dimensions (L x W x H)	503 x 113 x 153 mm (19-3/4 x 4-7/16 x 6-1/16")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance filter, Battery, Charger, Z: Battery and Charger are sold separately





**CL106FDSA / FDZ Cordless Cleaner**

12Vmax CXT Li-Ion Cordless Cleaner

Li-ion Ah 4.0 2.0 1.5



Capacity	600 mL
Continuous Use (min.)	with BL1041B: 42
Max Air Flow	1.3 m <sup>3</sup> /min
Max Sealed Suction (water column)	3.1 kPa (316 mmH <sub>2</sub> O)
Dimensions (L x W x H)	958x100x150 mm (37-3/4"x3-15/16"x5-7/8")
Net weight	1 - 1.1 kg (2.1 - 2.5 lbs.)

12Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Filter, Prefilter, DZ: Battery and Charger are sold separately

**CL108FDSA / FDZW Cordless Cleaner**

Lightweight and High Power

Li-ion Ah 4.0 2.0 1.5



Capacity	600 mL
Continuous Use (min.)	with BL1016B: Max / High / Normal: 10 / 12 / 25
Max Air Flow	1.2 m <sup>3</sup> /min
Max Sealed Suction (water column)	4.4 kPa (445mmH <sub>2</sub> O)
Dimensions (L x W x H)	956x110x150 mm (37-5/8"x4-5/16"x5-7/8")
Net weight	1.0 - 1.2kg (2.3 - 2.7 lbs.)

12Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter, Battery, Charger, DZ: Battery and Charger are sold separately

**CL117FDX2 Cordless Cleaner**

New

12Vmax Li-Ion Cordless 3-Speed Cleaner with LED Light, Built-In Battery

Li-ion Ah 2.0



Dust collecting type	Capsule
Capacity	650 mL
Continuous Use (min.)	Powerful / High / Normal: 10 / 18 / 55
Max air flow	1.0 m <sup>3</sup> /min
Max sealed suction	5.0 kPa (510 mmH <sub>2</sub> O)
Suction Power	Powerful / High / Normal: 29 / 15 / 3
Dimensions (L x W x H)	w/o Pipe & Nozzle: 457 x 110 x 136 mm (18 x 4-5/16 x 5-3/8")
Net weight	1.0 kg (2.2 lbs.)

12Vmax Built-in

Floor/Carpet T-nozzle, Sash nozzle, Sash nozzle holder, Straight pipe, Charger (country-specific), Easy Shake Off Filter

**CL100DW / DZX Cordless Cleaner**

Lightweight but with strong suction power (14W)

Li-ion Ah 1.3



Capacity	600 mL
Continuous Use (min.)	12
Max Air Flow	1.2m <sup>3</sup> /min
Max Sealed Suction (water column)	2.3kPa (235 mmH <sub>2</sub> O)
Dimensions (L x W x H)	966 x 103 x 150mm (38-1/32"x4-1/16"x5-7/8")
Net weight	0.88kg (1.94lbs)

10.8V

Battery Charger, Battery Cartridge, Nozzle Assembly, Sash Nozzle, Pipe, Filter (factory-mounted), Pre-filter (factory-mounted), DZ: Battery and Charger are sold separately

**CL102DWX Cordless Cleaner**

20W High suction power in Turbo mode

Li-ion Ah 1.3



Capacity	Cloth dust bag: 500mL Paper dust bag: 330mL
Continuous Use (min.)	High: 13, Low: 21 (with BL1013)
Max Air Flow	1.1m <sup>3</sup> /min
Max Sealed Suction (water column)	2.7kPa (270mmH <sub>2</sub> O)
Dimensions (L x W x H)	984 x 113 x 150mm (38-3/4"x4-7/16"x5-7/8")
Net weight	1.1 kg (2.4lbs) (with BL 1013)

10.8V

Nozzle Assembly (T-nozzle), Sash Nozzle, Pipe (Extension Pipe), Sash Nozzle Holder, Cloth Dust Bag, Paper Dust Bag 5 Units

**CL104DWYX Cordless Cleaner**

20W High suction power in Turbo mode

Li-ion Ah 1.5



Capacity	Dust Bag: 500 mL Paper Pack: 330 mL
Continuous Use (min.)	Turbo / High / Low: 7 / 10 / 20
Max Air Flow	1.3 m <sup>3</sup> /min
Max Sealed Suction (water column)	3.2 kPa (326 mmH <sub>2</sub> O)
Dimensions (L x W x H)	983x113x136 mm (38-3/4"x4-7/16"x5-3/8")
Net weight	1.1 kg (2.3 lbs)

10.8V

Charger DC1001 (Charging time: 180 min. [approx]), Nozzle Assembly, Sash Nozzle, Sash Nozzle Holder, Pipe, Cloth Dust Bag, Paper Dust Bag

**CL105DWR / DWX Cordless Cleaner**

20W High suction power in Turbo mode

Li-ion Ah 1.3



Capacity	Dust Bag: 500 mL Paper Pack: 330 mL
Continuous Use (min.)	Turbo / High / Low: 7 / 10 / 20
Max Air Flow	1.3 m <sup>3</sup> /min
Max Sealed Suction (water column)	3.2 kPa (326 mmH <sub>2</sub> O)
Dimensions (L x W x H)	983x113x136 mm (38-3/4"x4-7/16"x5-3/8")
Net weight	1.1 kg (2.3 lbs)

10.8V

Charger DC1001 (Charging time: 180 min. [approx]), Nozzle Assembly, Sash Nozzle, Sash Nozzle Holder, Pipe, Cloth Dust Bag, Paper Dust Bag

**DVC350Z Cordless Vacuum Cleaner**

Limited Qty

Cordless design for high portability

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Flow	1.4 m <sup>3</sup> /min
Max Sealed Suction (water column)	6.0 kPa (612 mmH <sub>2</sub> O)
Recoverable capacity	Dust: 3.0 L (0.8 gal)
Dimensions (L x W x H)	273x195x226 mm (10-3/4"x7-5/8"x8-7/8")
Net weight	2.2 - 2.4 kg (4.8 - 5.3 lbs)

18V

Nozzle Assembly, Dust Bag Assembly, Hose Complete, Shoulder Belt, Z: Battery and Charger are sold separately

Capsule type



One touch switch



**CL001G** **40Vmax**

Easy shake off dust filter

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.2m³/min** **21 kPa**

**DCL284F** **18V**

Easy shake off dust filter

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.2m³/min** **18 kPa**

**CL108FD** **12Vmax**

**Max Air Flow** **Max Sealed Suction**  
**1.2m³/min** **4.4 kPa**

Paper bag type



One touch switch



**CL002G** **40Vmax**

Easy shake off dust bag

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.2m³/min** **21 kPa**

**CL107FD** **12Vmax**

**Max Air Flow** **Max Sealed Suction**  
**1.4m³/min** **5.0 kPa**

**CL102D** **10.8V**

**Max Air Flow** **Max Sealed Suction**  
**1.1m³/min** **2.7 kPa**

Capsule type



Trigger switch



**DCL283F** **18V**

Easy shake off dust filter


Lock on button

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.1m³/min** **17.5 kPa**

**CL106FD** **12Vmax**

**Max Air Flow** **Max Sealed Suction**  
**1.3m³/min** **3.1 kPa**

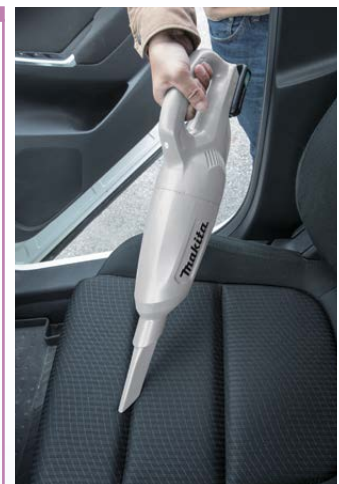

Cyclone unit



One touch switch



**CL003G** **40Vmax**

High performance filter set

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.0m³/min** **20 kPa**

**DCL286F** **18V**

High performance filter set

**BL** **HEPA** filter

**Max Air Flow** **Max Sealed Suction**  
**1.0m³/min** **18 kPa**





- Home
- Building
- Built-in Job Light
- Electronic 2-Speed
- Electronic 3-Speed
- Electronic 4-Speed

**Cyclone attachment**

**Easy dust disposal**



Cyclone pre-separation system separates dust from air.



Easy disposal of the fine dust collected in dust case



The main unit of the cleaner requires much less frequent dust disposal.



\* When used with DCL182 / wood dust

**Dust classes in accordance with the EU standard**

Since 1997, hazardous dusts have been categorized into 3 ( three ) classes, namely, Class L, Class M and Class H, which is regulated by IEC60335-2-69 ( world wide ) and by EN 60335-2-69. The vacuum cleaners suitable for each of dust class have been also defined by these regulations as follows :

Dust class	Model No.	Definition Of Dust	Major requirement	Dust permeability %
H	VC3211H	*OEL values >0.1mg/m <sup>3</sup> all kinds of dusts caused cancer, disease.	<ul style="list-style-type: none"> <li>• Air flow sensor</li> <li>• Filter protection structure *1</li> <li>• Structure that requires a tool for filter removal/installation *2</li> <li>• Structure that protects users from exposure to dust when emptying dust bag *3</li> </ul>	less than 0.005%
M	VC3211M, VC2211M, VC4210M, VC3012M,	*OEL values >0.1mg/m <sup>3</sup> as well as saw dust	<ul style="list-style-type: none"> <li>• Air flow sensor</li> <li>• Filter protection structure *1</li> </ul>	less than 0.1%
L	VC1310L, VC2510L, VC3210L, DVC860L, DVC861L, DVC865L, DVC866L, DVC867L, DVC750L, DVC150L, DVC151L, DVC155L, DVC156L, DVC157L, VC4210L, VC2012L, VC2512L, VC3011L, VC3012L	*OEL values >1mg/m <sup>3</sup>		less than 1%

**HEPA filter**

Apart from the above standard regulated by IEC/EN 60335-2-69, "HEPA" is widely recognized as one of famous guidelines of the filtration efficiency.

According to this standard, the filter of "HEPA" should remove more than 99.75% of airborne particles of 0.3µm in diameter.

Thus, it stipulates only a filtration efficiency of the filter itself, while IEC/EN60335-2-69 defines the vacuum machine suitable for each dust class (construction, mechanical strength of machine) as well as its dust permeability. In this sense, Dust Class H vacuum cleaner does not always have to be equipped with HEPA filter as long as it meets the requirements of IEC/EN60335-2-69.

Another difference between HEPA testing methods and the IEC/EN60335-2-69 is the dust loading.

Filter elements for dust classes M and H are to be tested with the limestone dust particles in large quantities for checking the physical strength of filter, while HEPA tests are done with very small liquid droplets.

\* OEL : Occupation Exposure Limit

In dirty indoor environment with high activity, such as schools, the average values of OEL are measured 0.5mg/m<sup>3</sup>. In case of "non-activity place", 0.15mg/m<sup>3</sup> in office and 0.2mg/m<sup>3</sup> in school are measured in average.

\*1 Filters should be protected from sharp objects such as nails when they are accidentally sucked up. The solution for VC3211M/ VC3211H is a protector for the filter units.

\*2 Filters loaded with dust should not be easily removed. The solution for VC3211H is a screw that locks the filter unit lock lever to the lock plate.

\*3 Dust should be prevented from flying around when emptying dust bags or replacing filters. The solution for VC3211H is the filter bag already available as an optional accessory of VC3211M.

\*4 Permeability of limestone (marble) particles having a diameter of 5 microns or less, in accordance with the EU standard

For Cleaning

\*for Model DVC261, DVC265, DVC660, DVC665 only

with front sleeve

Hose connection 28

Hose connection 38

Hose connection 32

Model

VC006GM DVC860L  
VC003GL DVC861L  
DVC150L DVC865L  
DVC151L DVC866L  
DVC155L DVC867L



Model

VC3211H  
VC3211M  
VC2211M  
VC3210L  
VC2510L  
VC1310L




Model

VC008G  
DVC261  
DVC265  
DVC660  
DVC665  
DVC350



Cleaning set

- Hose complete 38-2.5
- Straight pipe
- Bending pipe
- Nozzle assembly
- Corner nozzle



Hose 38mm

with front sleeve  
(front cuffs 32A)  
1.5m 199388-4



Hose 32mm with front sleeve

(front cuffs 32A)  
1.0m\*199453-9 1.7m 199493-7



Hose 28mm

1.0m \*143787-2 5.0m A-34229  
1.5m 144408-9  
1.5m 152992-0  
2.5m 195437-5  
3.5m 195433-3  
5.0m 195436-7



Hose 38mm

1.5m 198757-6  
2.5m 195434-1  
5m 195435-9



Bent pipe

192562-3

Straight pipe

192563-1



Bending pipe assembly with pipe lock

without sleeve  
(front cuffs 32A)

140G26-3



Bending pipe assembly with pipe lock

with sleeve

127093-3



Bending pipe assembly without sleeve

(front cuffs 32A) 458184-2



Bending pipe assembly with sleeve

126756-8



Front cuffs 22

195547-8



Cyclone attachment set with pipe lock\*

- 191D71-3
- 191D73-9



Cyclone attachment set\*

- 199491-1
- 191D75-5



Straight pipe with pipe lock

Aluminum Telescopic pipe 28L  
(L=590-942mm) 140G19-0  
Bending pipe assembly with pipe lock (140G26-3) set 191B15-1

Plastic Telescopic pipe 28L

(L=590-950mm) 127605-2

Plastic straight pipe 28L with pipe lock

(L=479mm)

- 459353-8
- 459356-2
- 458942-6

Plastic straight pipe 28L with pipe lock

(L=340mm)

- 191D76-3
- 191D78-9
- 191D77-1

Straight pipe

Plastic Telescopic pipe 28  
(L=500-850mm)  
123584-2

Plastic straight pipe 28

(L=465mm)

- 451424-7
- 451241-5
- 451244-9
- 456587-4

Plastic straight pipe 28

(L=320mm)

- 191D79-7
- 191D81-0
- 191D80-2

Aluminum joint pipe (L=465mm)

199844-4

Aluminum straight pipe 32 (L=465mm)

199843-6

for others vacuum cleaner nozzles 32mm (1-1/4")

Tapered nozzle set

192236-6

38mm Tip attachments

Nozzle assembly

Flat type (Dry)  
199455-5

F/C switching t-nozzle

Flooring & carpet (Dry)  
198184-7

Universal type

(Dry/ Wet)  
195551-7

Compact type A (Dry)

195549-4

Compact type B

(Wet model only)  
195550-9

Wide Type

(Wet model only)  
A-47846

Round brush

191657-9

Corner nozzle

410306-2



28mm Tip attachments

Nozzle assembly

Flat type  
199454-7



F/C switching t-nozzle 28

Flooring & carpet  
191G86-8



F/C switching t-nozzle 28

Flooring & carpet  
○ 198183-9 / 198532-0  
● 199431-9



Nozzle assembly

Floor t-nozzle 28  
○ 123485-4  
○ 123486-2  
● 123488-8  
● 123539-7



Floor/carpet t-nozzle

For rug / carpet  
○ 198150-4 / 198149-9  
○ 198525-7 / 198528-1  
○ 198523-1 / 198527-3  
● 198526-5 / 198529-9



Nozzle assembly

For rug / carpet  
122291-4



Seat nozzle 28

For automobile  
○ 199038-1  
○ 199041-2  
● 199039-9



Seat nozzle 120 set

For automobile  
140H95-0



Mat nozzle 120

For automobile  
459056-4



Brush brush set

191M30-1



Sash nozzle

○ 416041-0  
○ 451240-7  
● 451243-1  
● 456586-6



Corner nozzle 330

○ 198919-6  
○ 198990-0  
● 198992-6



Crevice nozzle 415

199439-3



Round brush

- 198552-4
- 198877-6 / 198878-4
- 198549-3 / 198553-2
- 198551-6 / 198555-8



Shelf brush

- 198537-0
- 198873-4
- 198538-8
- 198540-1



Soft brush 360 complete set

140H94-2



Rubber nozzle 330 set

\*422437-5



Flexible rubber nozzle 28

\*197900-4 / 197901-2



\*These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.

Model VC2000L



Hose 32mm

2.5m  
P-81739



Extension tubes

ø35x520mm black 2 pcs  
P-72942



Floor nozzle

D36x260  
(Dry/ Wet)  
W107402706



Floor nozzle

Universal Typ4(Wet)  
W000014295

Corner nozzle

ø35x200  
Use with P-81745  
W000029541





**for Dust (Powder)**

- Powder Filter Set
- Damper set
- Pre-filter set
- Dust paper filter or Poly bag set

**for Wet & Dry**

Cloth filter or Water filter (Water only)

**Compatible with usual Poly bags or Paper filters, allowing for:**




- Quick and easy dust disposal
- Lower-running cost compared with paper dust bag



	VC006GM (Wet & Dry)	VC003GL (Wet & Dry)	VC004GL (Dry)	DVC155L, DVC865L, DVC860L (Wet & Dry)	VC3211H, VC3211M, VC2211M, VC2201M (Wet & Dry)	VC3210L, VC2510L (Wet & Dry)	VC1310L (Wet & Dry)
<b>Use as a set</b>							
<b>Powder filter set</b> Dry only	1911B6-0	*191V70-3	*191V70-3	*197166-6	VC3211H: *196251-2 VC3211M, VC2211M, VC2201M: *196252-0	195441-4 *191F82-0	195438-3
<b>Damper set</b>	1911B4-4	191V68-0	191V68-0	195552-5	196254-6	195552-5	195552-5
<b>Pre-filter set</b>	1911B5-2	191V69-8	191V69-8	195553-3	196253-8	195612-3	195553-3
<b>Cloth filter</b> Wet & Dry		144625-1	144625-1	140248-3			
<b>Water filter</b> Wet only It is recommended using water filter when picking up large amount of water repeatedly.	1910N0-0	191V67-2		195555-9 DVC155L, DVC865L, DVC860L only		VC3210L: 195611-5 VC2510L: 195556-7	195555-9
<b>Dust paper filter 7L (5pcs)</b> for dry powder				A-49541			A-49541
<b>Filter bag set 10L/15L/25L/35L (5pcs)</b> for dry dust	35L: 1910Y4-9	10L: 1912R3-4 VC001GL, VC002GL, VC005GL, DVC860L, DVC861, DVC865L, DVC866L, DVC867L 15L: 195557-5 VC003GL, VC004GL, DVC155L, DVC156L, DVC157L			25L: 195558-3	25L: 195558-3 VC3210L only 15L: 195557-5 VC2510L only	15L: 195557-5
<b>Poly bag set (10pcs)</b>	1910R3-2	195432-5	195432-5	195432-5	195440-6	195440-6	195432-5


To use powder filter, remove the float cage and float by removing the bolts.



**Capacity up tank set**

DVC860L, DVC861L, DVC865L, DVC866L, DVC867L

\* "HEPA filter" Mark on tank



**With pipe lock Model:**

- CL001G
- CL002G
- CL003G
- DCL283F
- DCL284F
- DCL286F
- CL117FD



**Model:**

- DCL180
- DCL181F
- DCL182
- CL183D
- DCL106D
- CL107FD



**Model:**

- CL070D
- CL072D



**Model:**

- DCL184, CL121D



**Cyclone attachment set with pipe lock**

- 191D71-3
- 191D73-9



**Flexible hose set**

191E30-3



**Cyclone attachment set**

- 199491-1
- 191D75-5



\*Included sensormatic


**Flexible hose set**

- 191496-7
- 198867-9
- 198541-9
- 198542-7
- 198870-0
- 198543-5




**Blower nozzle complete**

140J64-3



**Flexible rubber nozzle 28**

197900-4



**Straight pipe with pipe lock**

**Aluminum Telescopic pipe 28L**  
(L=590-942mm) 140G19-0  
Bending pipe assembly with pipe lock (140G26-3) set 191B15-1

**Plastic Telescopic pipe 28L**  
(L=590-950mm) Gray 127605-2  
(L=479-719mm) ○ 1910Y3-1

Compatible model: CL001G, CL002G, CL003G, DCL283F, DCL284F, DCL286F

**Plastic straight pipe 28L with pipe lock**  
(L=479mm)

- 459353-8
- 459356-2
- 458942-6

**Plastic straight pipe 28L with pipe lock**  
(L=340mm)

- 191D76-3
- 191D78-9
- 191D77-1

**Straight pipe**

**Plastic Telescopic pipe 28**  
(L=500-850mm)

- 123584-2

**Plastic straight pipe 28 (L=465mm)**

- 451424-7
- 451241-5
- 451244-9
- 451425-5
- 457231-6
- 456587-4

**Plastic straight pipe 28 (L=320mm) for Cyclone attachment set**

- 191D79-7
- 191D81-0
- 191D80-2

**28mm Tip attachments**

**Nozzle assembly**

Floor t-nozzle 28

- 123485-4
- 123486-2
- 123488-8
- 123489-6
- 123843-4
- 123539-7



**F/C switching t-nozzle 28**

Flooring & carpet

- 198183-9 / 198532-0
- 199431-9



**F/C switching t-nozzle 28**

Flooring & carpet

191G86-8



**Sash nozzle**

- 416041-0
- 451240-7
- 451243-1
- 416225-0
- 457228-5
- 456586-6



**Round brush**

- 198552-4
- 198878-4
- 198553-2
- 198554-0
- 198881-5
- 198555-8
- Gray 191D67-4



**\*\*Rubber nozzle 330 set**

422437-5



**\*These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.**

**Floor/carpet t-nozzle**

For rug / carpet

- 198150-4 / 198149-9
- 198525-7 / 198528-1
- 198523-1 / 198527-3
- 198524-9 / 198522-3
- 198882-3 / 198883-1
- 198526-5 / 198529-9



**Nozzle assembly**

For rug / carpet

122291-4



**Brush brush set**

191M30-1



**Corner nozzle 330**

- 198919-6
- 198990-0
- 198992-6



**Shelf brush**

- 198537-0
- 198873-4
- 198538-8
- 198539-6
- 198876-8
- 198540-1



**Holder set**

Part No. 199971-7

Model: CL001G, CL002G, DCL283F, DCL284F, DCL180, DCL180F, DCL181F, DCL182, DCL182F, CL114FD, CL107FD, CL072D



**Seat nozzle 28**

For automobile

- 199038-1
- 199041-2
- 199039-9



**Seat nozzle 120 set**

For automobile

140H95-0



**Mat nozzle 120**

For automobile

459056-4



**Crevice nozzle 415**

199439-3



**Soft brush 360 complete set**


140H94-2



**Sash nozzle holder 28**

For Plastic straight pipe

Model: CL001G, CL002G, CL003G, DCL283F, DCL284F, DCL286F, CL114FD, CL117FD



- White 459354-6
- Blue 459355-4
- Black 459038-6
- Ivory 459036-0

- Others Model
- Ivory 416043-6
- White 451242-3
- Blue 451245-7
- Red 416227-6
- Pink 457229-3
- Black 456585-8

**Capsule type cleaner** Model: CL001G, DCL283F, DCL284F, DCL181F, DCL180F, DCL180, CL183D, CL108FD, CL106FD, CL070D

<p><b>HEPA filter</b> 199989-8 <b>HEPA filter</b> Except Model: CL183D</p>	<p><b>HEPA filter + Pre filter</b> <b>HEPA filter + Easy shake off dust filter</b> <b>Filter + Pre filter</b></p>	<p><b>Pre filter</b> 451208-3</p>
<p><b>Stay (Filter flame)</b> 458467-0</p>	<p><b>Filter</b> 443060-3</p>	<p><b>Easy shake off dust filter (High performance filter)</b> 199966-0 455176-2</p>
<p><b>Valve</b> 424208-6</p>	<p><b>Sponge sheet 57</b> 422268-2 Except Model: CL070D, CL183D</p>	<p><b>Easy shake off dust filter</b></p>

**Paper bag type cleaner** Model: CL002G, DCL182, DCL182F, CL114FD, CL121D, CL107FD, CL072D, DCL184, CL121D

<p><b>Cordless Cleaner</b></p>	<p><b>Sponge sheet 76-110 (Recessed wall)</b> 424804-0</p>	<p><b>Guard</b> 413J77-0 CL002G only</p>	<p><b>Paper filter Anti-bacterial type (High performance filter)</b> 10per pkg. 198744-5 (EU) 5per pkg. 198745-3</p>
<p><b>DCL184, CL121D</b></p>	<p><b>Valve stay complete (Dust stopper)</b> 143677-9 DCL184, DCL182, DCL182F, CL114FD, CL121D, CL107FD, CL072D 140K23-3 CL002G</p>	<p><b>Dust bag</b> 198746-1 166084-9 (w/o pkg)</p>	<p><b>Easy shake off dust bag</b> 198748-7 Except Model: CL002G only</p>
	<p><b>Sponge sheet 90</b> 422440-6</p>	<p><b>High performance dust bag set</b> 1910M4-5 CL002G only</p>	

**New cyclone unit** Model: CL001G, CL003G, DCL283F, DCL284F, DCL286F, DCL180, DCL181F

Compatible model: CL001G, DCL283F, DCL284F, DCL180, DCL181F

CL003G, DCL286F (Standard Equipment) Part No. 1910D3-4

CL001G, DCL283F, DCL284F, DCL180, DCL181F Part No. 1910D5-0

<p><b>Cyclone unit</b></p>	<p><b>Sponge sheet 62</b> 422909-0 (Standard Equipment)</p>
<p><b>Sponge filter</b> 422908-2 (Standard Equipment)</p>	<p><b>HEPA filter</b> <b>HEPA filter</b> 1910C9-5</p>
	<p><b>High performance filter set</b> 1910C7-9 (Standard Equipment)</p>

**Cleaner carrying bag**

Cleaner body, battery, charger and accessories can be stored together.



Except Model: CL003G, DCL286F, DCL184, CL121D (LxWxH: 600x210x190mm) Part No. 199901-8



Model: DCL184, CL121D (LxWxH: 490x210x230mm) Part No. 199900-0

**Blue dust capsule**

Transparent blue dust capsule. You can see the accumulated dust.

Model: DCL280F, DCL281F Part No. 136106-9



**Cordless Upright Cleaner** Model: DVC560

Color

**28mm Tip attachments**

**Seat nozzle 28**

For automobile  
 ○ 199038-1  
 ● 199041-2  
 ● 199039-9



**Long sash nozzle 330**

● 191D65-8  
 ○ 198919-6  
 ● 198990-0  
 ● 198992-6



**Seat nozzle 120 set**

For automobile  
 140H95-0



**Crevice nozzle 415**

199439-3



**Mat nozzle 120**

For automobile  
 459056-4



**Round brush**

● 191D67-4  
 ● 198552-4  
 ○ 198878-4  
 ● 198553-2  
 ● 198555-8



**Brush nozzle set**

191M30-1



**Shelf brush**

● 198537-0  
 ○ 198873-4  
 ● 198538-8  
 ● 198540-1



**Sash nozzle**

● 416041-0  
 ○ 451240-7  
 ● 456586-6



**Soft brush 360 complete set**

140H94-2



**Filter bag set**

10pcs. set  
 191T96-3




**Main filter h set**

191E39-5



**Brush complete set**

1910T8-6




**Cordless Portable Vacuum Cleaner** Model: DVC750L

**For Cleaning Hose Complete**

28-2.0m with  
 Front cuffs 38  
 140G04-3



**Dry only**



**Filter complete (HEPA filter)**

Dry  
 162518-0



**Pre filter and Damper set**

Dry only 199827-4



**Wet only**



**Wet filter set**

191M39-3



**Shoulder Belt Set**

199486-4



**38mm Tip attachments**

**Wide Nozzle**

458891-7



**Sash Nozzle**

458919-1



**Round brush**

191657-9



**Corner nozzle**

410306-2



**Joint 22-38**

195548-6



**Tapered nozzle set**

192236-6



**Joint 38**

418500-0




**28mm Tip attachments**




**Backpack Vacuum Cleaner** Model: VC008G, VC009G, DVC660, DVC665, DVC261, DVC265

DVC660, DVC665



- Dust bag assembly**  
191C30-1
- Filter bag set** (Paper dust bag)  
10 per pkg.  
191C26-2
- Main filter H set**  
(HEPA filter)  
191D12-9



VC008G, VC009G, DVC261, DVC265



- Dust bag assembly**  
197898-5
- Filter bag set** (Paper dust bag)  
10 per pkg.  
197903-8
- Filter set assembly** **HEPA filter**  
(HEPA filter)  
191Y27-2 (VC008G, VC009G)  
127725-2 (DVC261, DVC265)


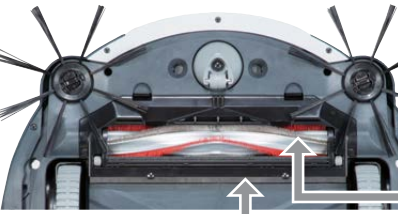
**Robotic Cleaner** Model: DRC200, DRC300

DRC200






- Boundary line tape**  
(15m roll)  
SH00000231
- Turn brush cover**  
SH00000064
- Side brushes**  
SH00000065 (Standard)
- Power brush**  
SH00000063 (Standard)
- Filter**  
SH00000213

DRC300

- Magnet tape set**  
191P18-9  
5m long,  
with double-sided tape
- Bottom plate assembly set**  
191P24-4
- Side brush assembly set**  
191P26-0 (Soft) for tatami mats, etc.  
191P28-6 (Standard)
- Main brush complete set**  
191P20-2 (Soft) for tatami mats, etc.  
191P22-8 (Standard)
- Filter H complete set**  
191P31-7 **HEPA filter**
- Sponge sheet set**  
191X35-7  
Sponge part to be attached to Bumper for protection of surrounding objects from damage

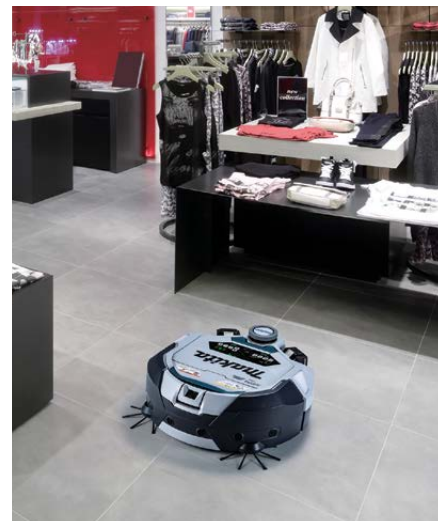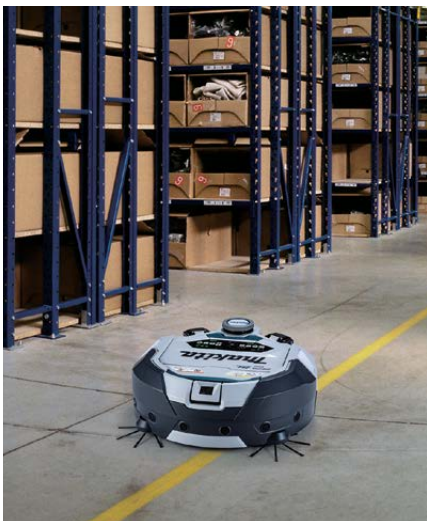

## 28mm Hose



Length (m)	Hose type	Front cuffs	Included Items	Part No.
1.0	Antistatic hose	without cuffs	---	143787-2
1.5	Antistatic hose	without cuffs	---	144408-9
1.5	Antistatic hose	Front cuffs 38	---	152992-0
1.5	Antistatic hose	Front cuffs 38	Front cuffs 22	A-34235
2.5	Antistatic hose	Front cuffs 22	Front cuffs 38 Front cuffs 24	195437-5
3.5	Antistatic hose	Front cuffs 38	Front cuffs 22 Front cuffs 24	195433-3

## Front Cuffs for 28mm hose or joint

Type	Hose Side	Cuff Type	Part No.
Front cuffs 22	28mm hose w/o cuffs	cuffs 22	195547-8
Front cuffs 38	28mm hose w/o cuffs	cuffs 38	195545-2
Front cuffs 24	Cuffs 22 or Cuffs 38	cuffs 24	195546-0
Joint 25 set	Cuffs 24	cuffs 22	192349-3
Rubber sleeve 18-21	Cuffs 22	For 18-21mm pipe	192202-3

## Hose band



Hose Size	Part No.
28/32/38	166116-2

## 28mm Bending pipe



Matching hose set / Matching cuffs	Matching pipe	Part No.
28mm hose w/o cuffs	28L	127093-3
	28	126756-8


## 28mm Bending pipe &amp; Aluminum Telescopic pipe set



Matching cuffs	Matching nozzle	Part No.
Front cuffs 32A	28	191B15-1


## Straight pipe 28L &amp; 28

Straight pipe 28L &amp; 28



Joint type	Part No.	Third party vacuum cleaner nozzles
C38	191M79-1	Proteam Side Winder
B35	191M78-3	KARCHER Nilfisk
A32	191M77-5	PACVAC SHOPVAC Proteam

## Aluminum pipe 32

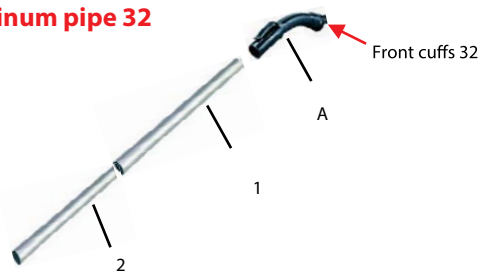

Item	Description	Material	Part No.
1	Aluminum joint pipe 32 (L=465mm)	Aluminum	199844-4
2	Aluminum straight pipe 32 (L=465mm)	Aluminum	199843-6

## Hose 38mm



Length (m)	Hose type	Front cuffs	Part No.
1.5	Antistatic hose	Front cuffs 38	198757-6
2.5	Antistatic hose	Front cuffs 38	195434-1
5	Antistatic hose	Front cuffs 38	195435-9

## Joint 38mm hose

Type	Hose Side	Nozzle side	Part No.
Front cuffs 24	Cuffs 22 or Cuffs 38	Cuffs 24	195546-0
Joint 22-38	Cuffs 38	Cuffs 22	195548-6
Joint 38	Cuffs 38	Nozzle 28	418500-0
Joint 25 set	Cuffs 38	70mm pipe with O-ring	181575-9

## Nozzle assembly for vacuum &amp; blow



Model	Size (mm)	Part No.
DUB182, DVC350	220	132025-7
UB100D, UB101D, DUB185, DUB186 UB1102, UB1103	220	123245-4
	430	123246-2

## Dust box assembly



Model	Part No.
LS0714, LS0714F, LS0714FL, LS0814FL, LS1216, LS1216FL, LS1216L	194175-6

## For DRC200




Description	Part No.
Side brushes	SH00000065
Power brush	SH00000063
Turn brush cover	SH00000064
Filter	SH00000213



***Makita***<sup>®</sup>

**OUTDOOR POWER EQUIPMENT**

# A wide variety of Lithium-ion Garden Tools

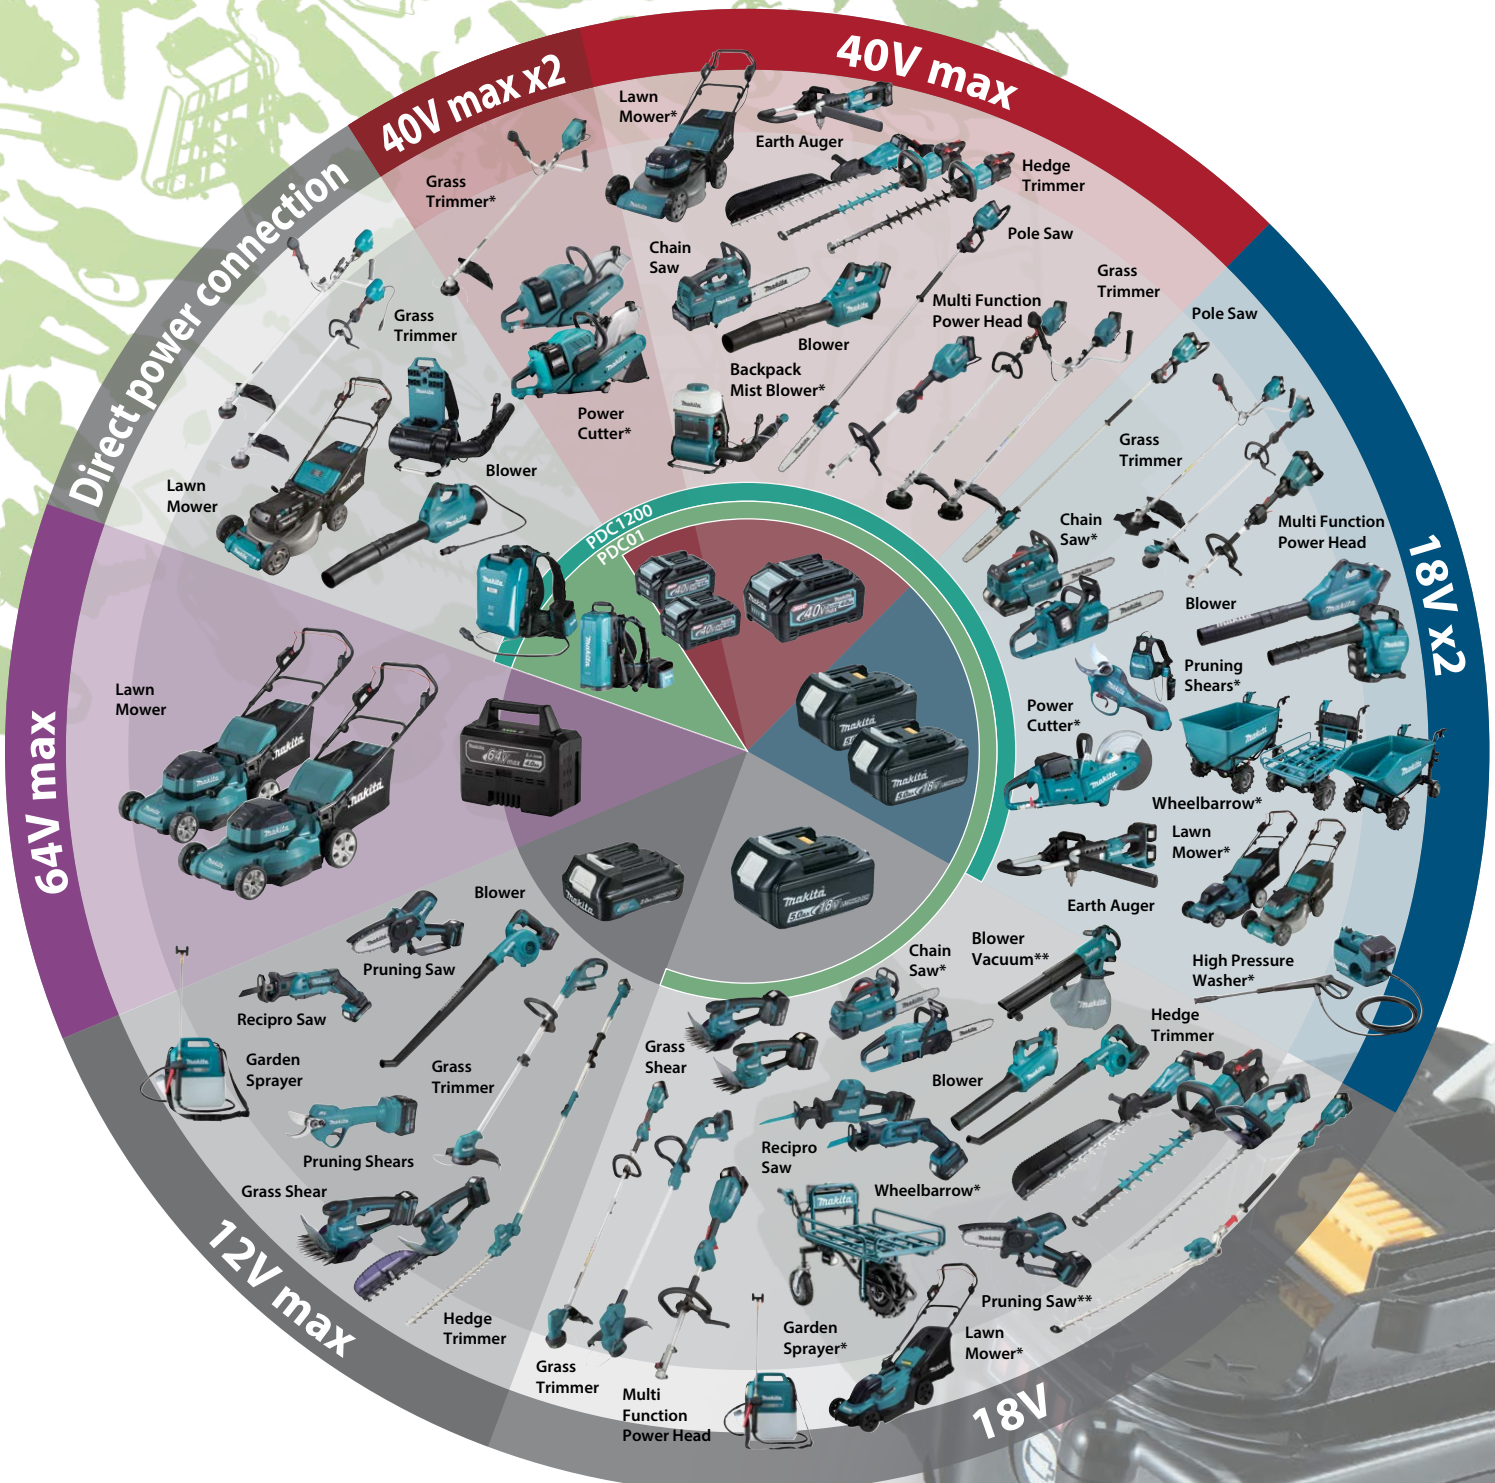

\* These models are not compatible with Portable Power Pack (PDC1200, PDC01)

Only rear handle type chainsaws are compatible

\*\* These models are not compatible with Portable Power Pack (PDC1200)



Portable Power Pack Compatible with Multiple Products

PDC1200

Powered by 36V-40Vmax built-in battery

1,200 Wh high capacity

(Approx. 6 times more capacity than BL1860B x 2)

IPX4

Charger: DC4001  
Charging time: 6 hours  
Part No. 191L01-2



**Height-adjustable waist belt**  
The position of the waist belt can be adjusted for personal fit and comfort.



**Quickly removable harness**  
can be attached/ removed from the main unit with a single action.



**Reflectors**  
keep operator visible from a distance even in the dark.

PDC01

Powered by up to four 18V LXT batteries

432 Wh high capacity

(with 4 pcs. of BL1860B)

(Batteries sold separately)

IPX4



Battery Powered Models



Adapter set  
Part No. 191N62-4



Adapter set  
Part No. 191J51-5



Adapter set  
Part No. 191J50-7



PDC1200A01 / A02 Portable Power Pack

1,200 Wh high capacity



Capacity	33.5 Ah
Energy Capacity	1,206 Wh
Number of Cells	100
Charging Time (hours)	6
Power Supply Cord	Battery Side: 1.1 m (3.6 ft) Adapter Side: 0.6 m (2.0 ft)
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")
Net weight	8.8 kg (19.4 lbs.)



Harness, Adapter for 36V (18V x2) [countries-specific], Charger. \* PDC1200A01 (1x 18V+18V Adaptor)

PDC01 (191A62-6 / 191A67-6) Portable Power Pack

Powered by up to four 18V LXT batteries



Capacity	24 / 12 Ah
Energy Capacity	432 Wh
Dimensions (L x W x H)	400 x 195 x 132 mm (15-3/4 x 7-5/8 x 5-3/16")
Net weight	1.7 kg (5.6 lbs.)



Harness, Adapter. \* 191A62-6 (18V+18V and 18V Adaptor), 191A67-6 (18V + 18V Adaptor only)

**UB001GM201(RMX) / GZ Cordless Blower**

Powerful blowing force (Max 17N)

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Max Air Volume	15.8 m <sup>3</sup> /min (554 CFM)
Max Air Velocity	62 m/s (140 MPH)
No Load Speed (RPM)	0 - 23,000
Dimensions (L x W x H)	850 - 950 x 167 x 297 mm (33-1/2 - 37-1/2 x 6-9/16 x 11-3/4")
Net weight	3.1 - 3.9 kg (6.8 - 8.6 lbs.)



40Vmax



Shoulder Belt, End Nozzle, Flat Nozzle, Extension Nozzle (country-spec), Adapter Pipe (country-spec), Battery, Charger, Z: Battery and Charger are sold separately

**UB002CZ01 Battery Powered Backpack Blower**

New

BL Brushless Battery Powered Variable Speed Blower

Max Air Volume	w/ End nozzle: 0 - 19.0 m <sup>3</sup> /min w/ Flat nozzle: 0 - 17.9 m <sup>3</sup> /min
Max Air Velocity	w/ End nozzle: 0 - 71.7 m/s w/ Flat nozzle: 0 - 76.0 m/s
Blowing Force	0 - 22.0 N
No load speed (RPM)	0 - 22,000
Continuous run time on a full battery charge	78 min
Sound power level	95.5 dB(A)
Dimensions (L x W x H)	w/o Nozzle: 267 x 565 x 715 mm (10-1/2 x 22-1/4 x 28-1/8") w/ Nozzle: 1,368 x 694 x 715 mm (54 x 27-1/4 x 28-1/8")
Net Weight	15.9 - 16.1 kg (35.1 - 35.4 lbs.)



Adapter Pipe, Flat Nozzle, Extension Nozzle

Cleaning Equipment

Outdoor Power Equipment

General Equipment



High blower performance similar to 50cm<sup>3</sup> class engine backpack blower



**1,200Wh high capacity**

Portable Power Pack  
**PDC1200**

**Quickly removable harness**  
can be attached/removed from the main unit with a single action.

**Reflectors**  
keep operator visible from a distance even in the dark.

**4-LED fuel gauge**  
indicates the battery status by four green LEDs.

**Battery fuel gauge**  
3-LED gauge (green)

**3-stage telescopic long nozzle**  
(End nozzle 82)

Battery Powered Backpack Blower  
**UB002C**

**High power**

Max blowing force

**22.0 N**

Max air volume

**\*19.0 m<sup>3</sup>/min**

Max air velocity

**\*71.7 m/sec**

\*With End nozzle 82




**WG WETGUARD** IPX4 compatible



Reduced user's arm fatigue from long continuous operation, due to the weights of the battery and the tool body transferred from the arm to back.



Variable speed control by trigger plus Cruise control lever



Position adjustable grip



**UB001CZ Battery Powered Blower**

Powerful blowing force (Max 20N)



Max Air Volume	Cruise Control Mode: 0 - 15.0 m <sup>3</sup> /min Boost Mode: 17.6 m <sup>3</sup> /min
Max Air Velocity	Cruise Control Mode: 0 - 60 m/s Boost Mode: 70
Avg. Air Velocity	Cruise Control Mode: 0 - 50 m/s Boost Mode: 58
Blowing Force	Cruise Control Mode: 0 - 15.0 Boost Mode: 20.0
No Load Speed (RPM)	Cruise Control Mode: 0 - 21,000 Boost Mode: 24,000
Dimensions (L x W x H)	960 - 1,060 x 295 x 180 mm
Net weight	2.6 - 2.9 kg (5.7 - 6.5 lbs.)



Shoulder Belt, End Nozzle, Flat Nozzle (country-specific), Extension Nozzle (country-specific), Adapter Pipe (country-specific)

**DUB363ZV Cordless Blower**

Able to use both in Blower and Vacuuming applications

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Volume	13.4 m <sup>3</sup> /min (473 CFM)
Max Air Velocity	65 m/s
No Load Speed (RPM)	0 - 7,850
Dimensions (L x W x H)	w/ 3-Stage Telescopic Long Nozzle: 737/786/836x200x415 mm (7-7/16"/31") 33"x7-7/8"x16-3/8"
Net weight	4.3 - 6.6 kg (9.4 - 14.6 lbs.)

18V x2



Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**DUB362Z Cordless Blower**

Brushless Cordless Variable 6-Speed Blower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity (Ah)	5.0 / 6.0
Energy Capacity (Wh)	90x2 / 108x2
Max Air Volume	13.4 m <sup>3</sup> /min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
No Load Speed (RPM)	11,400 - 21,500
Sound Power Level	93.5 dB(A)
Dimensions (L x W x H)	830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8" x8-1/8"x11-5/8")
Net weight	3.5 kg (7.7 lbs)

18V x2



Fast charger, Battery cartridge, Nozzle, Shoulder belt, Z: Battery and Charger are sold separately

**DUB361Z Cordless Blower**

Cordless blower powered by two 18V Li-ion batteries in series

430 mm

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Volume	High: 4.4 m <sup>3</sup> /min (155 CFM) Low: 2.6 m <sup>3</sup> /min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed (RPM)	High: 17,000 Low: 10,000
Sound Power Level	94.7 dB(A)
Dimensions (L x W x H)	905x141x194 mm (35-5/8"x5-5/8"x7-5/8")
Net weight	2.6 kg (5.9 lbs)

18V x2



Nozzle, Shoulder Belt, Z: Battery and Charger are sold separately

**DUB184Z Cordless Blower**

18V LXT BL Brushless Cordless Variable Speed Blower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Volume	13.0 m <sup>3</sup> /min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
No Load Speed (RPM)	0 - 18,000
Continuous Use (min.)	w/ BL1860B: 12, w/ BL1850B: 10
Sound Pressure Level	86.6 dB(A)
Sound Power Level	93.5 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 825x160x285mm (32-1/2"x6-5/16"x11-1/4")
Net weight	2.5 - 3.0 kg (5.4 - 6.7 lbs.)

18V



Shoulder Belt, Nozzle, Battery, Charger, Hex Wrench, Z: Battery and Charger are sold separately

**DUB187Z Cordless Blower Vacuum**

New

18V LXT BL Cordless Variable Speed Blower Vacuum

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



No load speed (RPM)	9,000-13,500
Max air volume (Vacuum)	6.1 m <sup>3</sup> /min
Max sealed suction	3.3 kPa
Dust bag capacity	25 L
Max air volume	Blower: 4.2 m <sup>3</sup> /min Vacuum: 6.1 m <sup>3</sup> /min
Max air velocity	Blower: 64.0 m/s
Max sealed suction	Vacuum: 3.3 kPa
Dimensions (L x W x H)	1,168 x 164 x 416 mm (46 x 6-1/2 x 16-3/8")
Net weight	3.7 - 4.0 kg (8.2 - 8.8 lbs.)

18V



Dust bag, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

**DUB186Z Cordless Blower**

18V LXT Cordless Variable 3-Speed Blower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Volume	3.2 m <sup>3</sup> /min
Max Air Velocity	68 m/s
No Load Speed (RPM)	0 - 18,000
Blowing Force	2.5 N
Sound Power Level	92.4 dB(A)
Dimensions (L x W x H)	w/ BL1815N: 859x156x195 mm (33-3/4"x6-1/8"x7-5/8") w/ BL1830B / BL1850B / BL1860B: 861x156x210 mm (34"x6-1/8"x8-1/4")
Net weight	1.6 - 2.1 kg (3.5 - 4.6 lbs.)

18V



Garden Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

**UB101DZ Cordless Blower**

12Vmax CXT Cordless Variable 3-Speed Blower

Li-ion Ah 4.0 | 2.0 | 1.5



Max Air Volume	2.6 m <sup>3</sup> /min
Max Air Velocity	56 m/s
Max Sealed Suction	N/A kPa
No Load Speed (RPM)	0 - 15,800
Blowing Force	1.6 N
Run Time (min)	w/ BL1016, High / Mid / Low: 7 / 20 / 45
Dimensions (L x W x H)	w/ BL1016/BL1021B: 849 x 155 x 184 mm (33-1/2 x 6-1/8 x 7-1/4") w/ BL1041B: 852 x 155 x 202 mm (33-1/2 x 6-1/8 x 8")
Net weight	1.4 - 1.9 kg (3.1 - 4.2 lbs.)

12Vmax



Garden Nozzle, Flexible Hose (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately

## DUB187 Cordless Blower Vacuum powered by 18V LXT Li-Ion battery



### Variable speed control by trigger + Cruise control

Cruise control lever allows user to lock the variable speed control trigger at the desired power level.

### Dust bag capacity

# 25L

dust bag with a large inlet opening

### Vacuum Mode

Max air volume  
**6.1** m<sup>3</sup>/min

Max sealed suction  
**3.3** kPa



### Vacuum / Blower

Single action lever  
for blower / vacuum  
mode selection

### Continuous run time (approx.) on a full battery charge: minutes

### Vacuum Mode / Blower Mode

# 14 min

With BL1860B battery

### Blower Mode

Max air volume  
**4.2** m<sup>3</sup>/min

Max air velocity  
**64** m/s



Vacuum

Photo: DUB187



Blower

Two casters

### DUB185Z Cordless Blower

18V LXT Cordless Variable 3-Speed Blower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Volume	3.2 m <sup>3</sup> /min
Max Air Velocity	98 m/s
Max Sealed Suction	5.8 kPa
No Load Speed (RPM)	0 - 18,000
Blowing Force	3.1 N
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	w/ BL1815N: 515x156x195 mm (20-1/4"x6-1/8"x7-5/8") w/ BL1830B / BL1850B / BL1860B: 517x156x210 mm (20-3/8"x6-1/8"x8-1/4")
Net weight	1.6 - 2.1 kg (3.5 - 4.6 lbs.)

18V



Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

### UB100DZ Cordless Blower

12Vmax CXT Cordless Variable 3-Speed Blower

Li-ion Ah 4.0 | 2.0 | 1.5



Max Air Volume	2.6 m <sup>3</sup> /min
Max Air Velocity	75 m/s
Max Sealed Suction	4.0 kPa
No Load Speed (RPM)	0 - 15,800
Blowing Force	1.8 N
Run Time (min)	w/ BL1016, High / Mid / Low: 8 / 20 / 45
Dimensions (L x W x H)	w/ BL1016/BL1021B: 505 x 155 x 184 mm (19-7/8 x 6-1/8 x 7-1/4") w/ BL1041B: 508 x 155 x 202 mm (20 x 6-1/8 x 8")
Net weight	1.4 - 1.9 kg (3.1 - 4.2 lbs.)

12Vmax



Nozzle, Dust Bag (country-specific), Flexible Hose (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately

### UB1102 Blower

High output air volume

303



Continuous Rating Input	600W
Air Volume	4.1 m <sup>3</sup> /min
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	479x185x178 mm (18-7/8"x7-1/4"x7")
Net Weight	1.9 - 2.2 kg (4.3 - 4.8 lbs.)
Power Supply Cord	2.5 m (8.2 ft.)



Nozzle Assembly Front Cuffs 24, Poly Bag Set

### UB1103 Blower

High output air volume

303

110V  
UB1103/B



Continuous Rating Input	600W
Air Volume	0-4.1 m <sup>3</sup> /min
Air Pressure	0-5.7 kPa (0-580 mmH <sub>2</sub> O)
No Load Speed (RPM)	0-16,000
Dimensions (L x W x H)	479x185x178mm (18-7/8"x7-1/4"x7")
Net Weight	2.0kg (4.3lbs)
Power Supply Cord	2.5m (8.2ft)



Nozzle Assembly Front Cuffs 24, Poly Bag Set



**UX01GZ** Cordless Multi Function Power Head

High power BL motor enables to work under heavy load

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



No Load Speed (RPM)	High: 0-9,700 Medium: 0-8,200 Low: 0-5,700
Dimensions (L x W x H)	1,027 x 320 x 209 mm (40-1/2 x 12-5/8 x 8-1/4")
Net weight	4.1-4.7 kg (9.3-10.6 lbs.)

40Vmax



Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

**DUX60Z** Cordless Multi Function Power Head

Multi Function System

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



No Load Speed (RPM)	High: 0-9,700 Medium: 0-8,200 Low: 0-5,700
Dimensions (L x W x H)	1,011 x 320 x 216 mm (39-3/4 x 12-5/8 x 8-1/2")
Net weight	4.1-8.7 kg (8.9-19.2 lbs.)

18V x2



Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

**Cordless Multi Function Power Head**  
UX01G / DUX60 / DUX18




**BL MOTOR**  
High Power  
BL Motor



High power BL motor allows for more comfortable operation in rather heavy-duty application using an attachment such as power brush, power sweep, blower, etc.



Reverse switch for easy removal of grass clippings from the cutting tool (UX01G / DUX60 only)




Easy Change



Excellent Mobility

**AFT** Active Feedback sensing Technology

- If kickback occurs while using below attachment, brake works automatically:
  - 1) Brushcutter with metal blade attachment
  - 2) Pole saw attachment
- If the sensor detects drastically decrease of rotation, the motor stops immediately.

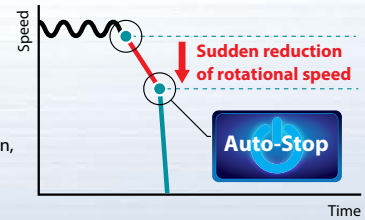

**DUX18Z** Cordless Multi Function Power Head

Multi Function System

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



No Load Speed (RPM)	High: 0-9,700 Low: 0-6,800
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 977 x 318 x 175 mm (38-3/4 x 12-1/2 x 6-7/8")
Net weight	2.8-10.3 kg (6.2-22.7 lbs.)

18V



Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

**UC003GZ01** 300mm (12") Cordless Chain Saw

New

40Vmax XGT BL Brushless Cordless 30 cm (12") Chain Saw

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0-24.8 m/s (0-1,490 m/min) (0-4,880 FPM)
Chain Oil Tank Volume	200 mL (6.8 US oz)
Dimensions (L x W x H)	w/o Guide Bar :266 x 194 x 227 mm (10-1/2 x 7-5/8 x 8-15/16")
Net weight	3.9-4.5 kg (8.6-9.9 lbs.)

40Vmax



Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**BL MOTOR**  
High operating efficiency

**Powerful & durable**  
High power Li-ion battery

**Metal handle**

**Metal frame**

**Excellent tool balance**

**Slim body**

**42cc engine tool**

**Center of gravity**

Photo: UC012G

**High Speed cutting** Compared to predecessor model

**80% up**

- $\varnothing$ 300mm cedar timber
- Guide bar / Saw chain: 400mm/ 80TXL
- Battery : BL4050F

**Cutting work amount**  
Work volume on a single full battery charge

**About 35 cuts**

**Max Chain Speed**

**25.5 m/s**

**High performance in close-to-the-ground cutting**

**Metal spike bar**

**Large oil tank cap**

### UC012GT101(RT) / GZ 400mm (16") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah	8.0   5.0   4.0   2.5   2.0
Guide Bar Length	400 mm (16")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.7 m/s (0 - 1,482 m/min) (0 - 4,862 FPM)
Chain Oil Tank Volume	230 mL (7.8 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 446 x 233 x 274 mm (17-1/2 x 9-1/8 x 10-3/4")
Net weight	6.0 - 6.5 kg (13.2 - 14.4 lbs.)

### UC015GT101(RT) / GZ 350mm (14") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah	8.0   5.0   4.0   2.5   2.0
Guide Bar Length	350 mm (14")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.7 m/s (0 - 1,482 m/min) (0 - 4,862 FPM)
Chain Oil Tank Volume	230 mL (7.8 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 446 x 233 x 274 mm (17-1/2 x 9-1/8 x 10-3/4")
Net weight	6.0 - 6.5 kg (13.2 - 14.4 lbs.)

**40Vmax**

Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**40Vmax**

Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

### UC014GT101(RT) / GZ 300mm (12") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah	8.0   5.0   4.0   2.5   2.0
Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.7 m/s (0 - 1,482 m/min) (0 - 4,862 FPM)
Chain Oil Tank Volume	230 mL (7.8 US oz)
Dimensions (L x W x H)	: 446 x 233 x 274 mm (17-1/2 x 9-1/8 x 10-3/4")
Net weight	6.0 - 6.5 kg (13.2 - 14.4 lbs.)

### DUC353ZB 350mm (14") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws

Li-ion Ah	6.0   5.0   3.0   1.5
Guide Bar Length	350 mm (14")
Chain Pitch / Chain Gauge	9.5 mm (3/8") / 1.1 / 1.3 mm (0.043" / .050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min)
Chain Oil Tank Volume	200 mL
Sound Power Level	98.7 dB(A)
Dimensions (L x W x H)	762x215x235mm (30"x8-1/2"x9-1/4")
Net weight	4.7 kg - 5.4kg (10.4 lbs - 11.8lbs)

**40Vmax**

Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**18V x2**

Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Z: Battery and Charger are sold separately

### DUC355Z 350mm (14") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws

Li-ion Ah	6.0   5.0   3.0   1.5
Guide Bar Length	350 mm (14")
Chain Pitch / Chain Gauge	9.5 mm (3/8") / 1.1 / 1.3 mm (0.043" / .050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min)
Chain Oil Tank Volume	200 mL
Sound Power Level	98.7 dB(A)
Dimensions (L x W x H)	762x215x235mm (30"x8-1/2"x9-1/4")
Net weight	4.7 kg - 5.4kg (10.4 lbs - 11.8lbs)

### DUC306ZB 300mm (12") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws

Li-ion Ah	6.0   5.0   3.0   1.5
Guide Bar Length	300 mm (12")
Chain Pitch / Chain Gauge	9.5 mm (3/8") / 1.1 or 1.3 mm (0.043" or 0.050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL (6.8 US oz)
Sound Power Level	103 dB(A)
Dimensions (L x W x H)	270-651x205x232mm (10-5/8"-25-5/8"x 8-1/8"x9-1/8")
Net weight	4.6 - 5.1 kg (10.1 - 11.1 lbs.)

**18V x2**

Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Wrench, Z: Battery and Charger are sold separately

**18V x2**

Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Wrench, Z: Battery and Charger are sold separately



**DUC357ZX4 350mm (14") Cordless Chain Saw**

New

Consistently powerful cutting action

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Guide Bar Length	350 mm (14")
Chain Pitch / Chain Gauge	3/8" / 1.1 mm (0.043") or 1.3 mm (0.050")
Chain Speed	7.7 m/s
Chain Oil Tank Volume	150mL (5.1 US oz)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	762 x 214 x 234 mm (30 x 8-3/8 x 9-1/4")
Net weight	4.2 - 4.4 kg (9.3 - 9.7 lbs.)



18V **LXT BL XPT** 1

Saw chain, Guide bar, Guide bar case, Round file (country-specific), Chain oil (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DUC254Z 250mm (10") Cordless Chain Saw**

Efficiency equivalent to 23mL class engine chain saw

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Guide Bar Length	250 mm (10")
Chain Pitch / Chain Gauge	3/8" / 1.1 mm (0.043") or 3/8" / 1.3 mm (0.050")
Chain Speed	0 - 24 m/s (0 - 1,440 m/min) (0 - 4,720 FPM)
Chain Oil Tank Volume	140 mL
Sound Power Level	103.2 dB(A)
Dimensions (L x W x H)	w/o Guide Bar: 258x184x191 mm w/ 25 cm (10") 90PX Sprocket Nose Bar: 482x184x191 mm
Net weight	2.8 - 3.2 kg (6.2 - 6.9 lbs.)



18V **LXT BL XPT** 3

Saw Chain, Guide Bar, Guide Bar Cover, Wrench, Accessory Bag, Z: Battery and Charger are sold separately

**UC100DZ 100mm (4") Cordless Pruning Saw**

New

Easy-to-use, compact product enables easy pruning of garden or orchard trees

Li-ion Ah 4.0 | 2.0 | 1.5

Guide bar length	100 mm (4")
Saw chain	Type: 80TXL Pitch: 0.325" Gauge: 1.1 mm (0.043")
Chain speed	8.0 m/s (480 m/min) (1,570 FPM)
Chain oil tank volume	55 mL (1.9 USoz)
Dimensions (L x W x H)	w/o Battery: 350 x 90 x 215 mm (13-3/4 x 3-1/2 x 8-1/2") w/ BL1041B: 398 x 90 x 226 mm (15-5/8 x 3-1/2 x 8-7/8")
Net weight	1.5 - 1.6 kg (3.3 - 3.5 lbs.)



12Vmax **CXT BL XPT**

Saw chain, Guide bar, Guide bar cover, Round file (country-specific), Chain oil (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately

**Movable guard** covers the upper side of guide bar, and opens gradually wider as saw chain cuts deeper in branch.

**Lock-off lever accessible from both sides**



Guide bar length **100mm**

**Automatic chain lubrication**



Oil tank cap Chain oil view window

**Flexible rubber guard for hand**

minimizes the chance that saw chain will stall due to forgetting to supply chain oil.



Automatic chain lubrication

**UC100D**

Work amount

**73 pcs.**

Battery: BL1021B

Test conditions: Cut ø50 cedar rod under an optimal pressing load of 20N or less on cutting edge. Saw chain: 80TXL

**UC3541A 350mm (14") / UC4041A 400mm (16") Chain Saw**

Excellent in heavy duty application

132

Continuous Rating Input	1,800W
Chain Speed Per Minute	870m (2,900ft)
Saw Chain Pitch	3/8" / 1.1mm (.043")
Saw Chain Gauge	1.3mm (.050")
Sound Power Level	101.3dB(A)
Dimensions (L x W x H)	455x245x200mm (17-7/8"x9-5/8"x7-7/8")
Net Weight	4.7kg (10.3lbs)

Dimensions: excluding blade and guide bar



1

Chain Blade, Guide Bar Cover, Hook Complete

**UC3551A 350mm (14") / UC4051A 400mm (16") Chain Saw**

Large trigger switch with soft start for smooth start-ups

153

Continuous Rating Input	2,000W
Chain Speed Per Minute	870m (2,900ft)
Guide Bar Length	UC3551A: 350mm (14")
Saw Chain Pitch	3/8"
Saw Chain Gauge	1.3mm (.050")
Sound Power Level	101.8dB(A)
Dimensions (L x W x H)	505x200x220mm (19-7/8"x7-7/8"x8-5/8")
Net Weight	5.5kg (12.1lbs)
Power Supply Cord	0.3m (0.98ft)

Dimensions: excluding blade and guide bar



1

Chain Blade, Guide Bar Cover, Hook Complete

**UC4551A 450mm (18") Electric Chain Saw**

Heavy-duty for fast and efficient cutting

153



Continuous rating input	2,000W
Chain speed per minute	870 m (2,900 ft)
Guide Bar Length	450 mm (18")
Saw chain	Pitch : 3/8" Gauge: 1.3 mm (0.050")
Sound Power Level	101.8 dB(A)
Dimensions (L x W x H)	505x200x220 mm (19-7/8"x7-7/8"x8-5/8")
Net weight	5.7 kg (12.4 lbs.)
Power supply cord	0.3 m (0.98 ft)

Dimensions: excluding blade and guide bar



Saw Chain, Guide Bar Cover, Hook complete

**UA001GM102(RM) / GZ01 250mm (10") Cordless Pole Saw**

40Vmax XGT BL AFT 25 cm (10") Cordless Pole Saw

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Guide Bar Length	250 mm (10")
Saw chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	w/o Guide Bar: 2,228 x 157 x 189 mm (87-3/4 x 6-3/16 x 7-7/16")
Net weight	6.0 - 7.3 kg (13.2 - 16.1 lbs.)



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly, Battery, Charger, Round File (country-specific), File (country-specific), Chain Oil (country-specific), Z: Battery and Charger are sold separately

**Cordless Pole Saw / Cordless Telescopic Pole Saw**  
UA001G / UA002G 250mm (10")

**BL MOTOR** High operating efficiency

High power BL motor delivers the same or higher operation efficiency than 35mL class engine models.



**AFT** Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

**XPT | WG | IPX4**



High water-resistance

\*Saw head weight  
**0.7kg**

**Excellent tool balance**

The motor is located in the battery housing at the bottom of the tool. This bottom-mounted motor reduces the saw head weight, allowing for:

- Ease to control the saw head for easy access to a desired cutting position
- Reduced user fatigue and stress

\*without guide bar, saw chain and oil

UA001G  
Total length  
**2,230mm\***  
Fixed length

\*without guide bar

UA002G  
Telescopic  
Total length  
**2,516 - 3,748mm\***

**Slim saw head**  
The same slim design as engine pole saws provides easy maneuverability into branches.



Retractable oil tank cap knob

Saw head width  
**87mm**

No load chain speed  
**20.0 m/s**

Photo: UA002G

**UA002GM102(RM) / GZ01 250mm (10") Cordless Telescopic Pole Saw**

40Vmax XGT BL AFT 25 cm (10") Cordless Telescopic Pole Saw

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Guide Bar Length	250 mm (10")
Saw chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	w/o Guide Bar: 2,515 - 3,747 x 157 x 191 mm (99 - 147-1/2 x 6-3/16 x 7-1/2")
Net weight	7.6 - 8.9 kg (16.8 - 19.6 lbs.)



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Hex Wrench, Band Assembly, Battery, Charger, Round File (country-specific), File (country-specific), Chain Oil (country-specific), Z: Battery and Charger are sold separately

**DUA301ZB 300mm (12") Cordless Telescopic Pole Saw**

High cutting efficiency

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Guide Bar Length	300 mm (12")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	2,554 - 3,789 x 155 x 193 mm (100-1/2" - 149" x 6-1/8" x 7-5/8")
Net weight	7.8 - 8.5 kg



Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

# Powered by two 18V LXT batteries in series

**Max load capacity** on flat ground (0 - 3 degrees)  
**300 kg**

on slope (3 - 12 degrees)  
**180 kg**

**Traveling distance** **7.2 km**  
with BL1860B x 4

**Traveling speed change**

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)



**Max climbing ability** **12°**

**High power Brushless motor** **BL MOTOR**

**1 Hand brake lever**

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.


**2 Electric brake plus Electromagnetic brake**

**Electric brake**

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

**Electric brake**

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.



**Driving wheels (Front wheels) touch the ground stably.**

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.



**Headlights**

- turn on/off by pressing a light button on the battery box.
- turn off automatically with no operation for 10 minutes.




Two or four batteries can be installed for a 2-series / 2-parallel connection for a secure amount of work.



**Tool-less handle height adjustment**

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.



**Wet Guard / IPX4-compatible**

High water-resistance allows to operate the machine even if it is wet with water.




**Double tires (Rear wheels only)**

Double tires, each of which rotates independently, improve swivel performance.



**Neutral mode**

shuts off the power transmission between the motor shaft and the axle in case of no battery installation, low battery capacity or broken motor, enabling to drive the wheelbarrow manually.



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

## DCU603Z Battery Powered Wheelbarrow

New


18V X2 (36V) LXT BL 4-Wheel Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,480 x 730 x 820 mm (58-1/4 x 28-3/4 x 32-1/4")
Net weight	122 - 124 kg (269 - 273 lbs.)

18V x2



Z: Battery and Charger are sold separately

## DCU604Z Battery Powered Wheelbarrow

New

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,450 x 730 x 820 mm (57 x 28-3/4 x 32-1/4")
Net weight	119 - 120 kg (262 - 265 lbs.)

18V x2



Z: Battery and Charger are sold separately

## DCU605Z Battery Powered Wheelbarrow

New

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,440 x 730 x 820 mm (56-5/8 x 28-3/4 x 32-1/4")
Net weight	104 - 106 kg (229 - 234 lbs.)

18V x2



Z: Battery and Charger are sold separately

## DCU180Z Battery Powered Wheelbarrow

Moving cart powered by one or two LXT Li-ion batteries

Li-ion Ah 6.0 5.0 3.0 1.5



Max Run Time (min)	with BL1860B: 120
Max Load Capacity	130 kg (290 lbs.)
Traveling Speed	Forward, High / Low: 0 - 3.5 / 0 - 1.5 km/h Reverse: 0 - 1 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed / During operation: 1,315 x 1,060 x 900 mm (51-3/4" x 41-3/4" x 35-1/2")
Net weight	39.3 - 44.8 kg (86.5 - 98.7 lbs.)

18V



Lock Key, Support Legs, Wrenches, Z: Battery and Charger are sold separately

UH014GM101(RM) / GZ  
750mm (29-1/2") Cordless Hedge Trimmer

40Vmax XGT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 5.0 4.0 2.5 2.0



Blade Length	750 mm (29-1/2")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	High / Mid / Low: 5,000 / 3,600 / 2,000
Dimensions (L x W x H)	w/o Battery: 1,225 x 270 x 135 mm w/ BL4020 / BL4025: 1,225 x 270 x 135 mm w/ BL4040: 1,225 x 270 x 150 mm w/ BL4050F: 1,225 x 270 x 168 mm
Net weight	4.0 - 4.7 kg (8.8 - 10.4 lbs.)

40Vmax



Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

## UH006GZ 600mm (23-5/8") Cordless Hedge Trimmer

Reliable cutting performance like engine/AC hedge trimmers

Li-ion Ah 5.0 4.0 2.5 2.0



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	25.0 mm (1")
Strokes Per Minute (SPM)	High / Mid / Low: 4,000 / 3,000 / 2,000
Sound Pressure Level	81 dB(A)
Sound Power Level	92 dB(A)
Vibration Level	Front / Rear: 3.0 / 2.5 m/s <sup>2</sup> or less w/ BL4020 / BL4025: 44-1/4 x 8-3/4 x 7-1/2")
Dimensions (L x W x H)	1,123 x 223 x 191 mm
Net weight	4.4 - 5.0 kg (9.7 - 11.0 lbs.)

40Vmax



Blade Cover, Safety goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

Cordless Hedge Trimmer  
UH014G

Same blade performance as petrol hedge trimmer.



## Easy-to-use Front handle

- Redesigned the gripping position of Front handle and place the center of gravity on the line connecting Front handle and Rear handle to reduce the force applied in the direction of twisting the wrist.

- Due to the inclination of Front handle end, it can be gripped when cutting the top surface, the angle at which the wrist is returned can be reduced, and wrist fatigue is reduced.



Twigs are caught easily and held firmly

Cutting strokes per minute  
**5,000 min<sup>-1</sup>**  
High speed modeLow noise  
**92 dB (A)**Maximum branch diameter  
Maximum cutting diameter:  
**23.5 mm**  
18mm

**DUH754SZ 750mm (29-1/2") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	750 mm (29-1/2")
Max Cutting Capacity	23.5 mm (15/16")
Sound Pressure Level	80.6 dB(A)
Sound power level	91.6 dB(A)
Vibration Level	2.5 m/s <sup>2</sup> or less
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Dimensions (L x W x H)	1,198x280x147 mm (47-1/4"x11"x5-3/4")
Net weight	4.1 kg (9.0 lbs.)

18V



Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DUH604SZ 600mm (23-5/8") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	23.5 mm (15/16")
Sound Pressure Level	79.3 dB(A)
Sound power level	90.3 dB(A)
Vibration Level	2.5 m/s <sup>2</sup> or less
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Dimensions (L x W x H)	1,057x280x147 mm (41-1/2"x11"x5-3/4")
Net weight	4.0 kg (8.8 lbs.)

18V



Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DUH651Z 650mm (25-1/2") Cordless Hedge Trimmer**

High maneuverability and environmentally-friendly

442 mm

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade length	650mm (25-1/2")
Strokes Per Minute (SPM)	2,000-3,600
Sound Power Level	91.1 dB(A)
Dimensions (L x W x H)	1,135x225x200mm (44-3/4"x8-7/8"x7-7/8")
Max Output	0.32kW
Net weight	4.7 - 5.5 kg (10.3 - 12 lbs.)

18V x2



Charger, Battery, Blade Cover, Z: Battery and Charger are sold separately

**DUH751Z 750mm (29-1/2") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	750 mm (29-1/2")
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Vibration Level	2.5 m/s <sup>2</sup>
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	1,261x225x192 mm (49-1/2"x8-7/8"x7-1/2")
Net weight	3.8 - 4.5 kg (8.4 - 9.8 lbs.)

18V



Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DUH601Z 600mm (23-5/8") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	600 mm (23-5/8")
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Vibration Level	2.5 m/s <sup>2</sup> or less
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	1,121x225x192 mm (44-1/4"x8-7/8"x7-1/2")
Net weight	3.8 - 4.5 kg (8.4 - 9.8 lbs.)

18V



Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

**DUH502Z 500mm (19-3/4") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	500 mm (19-5/8")
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Vibration Level	2.5 m/s <sup>2</sup>
Sound Power Level	86.8 dB(A)
Dimensions (L x W x H)	1,016x225x192 mm (40"x8-7/8"x7-1/2")
Net weight	3.7 - 4.4 kg (8.2 - 9.7 lbs.)

18V



Blade Cover, Safety Goggles (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**DUH606Z 600mm (23-5/8") Cordless Hedge Trimmer**

**New**

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,000
Continuous Use (min.)	w/ BL1860B: 70
Dimensions (L x W x H)	1,016 x 207 x 185 mm (40 x 8-1/8 x 7-1/4")
Net weight	2.7 - 3.0 kg (6.0 - 6.6 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

**DUH506Z 500mm (19-3/4") Cordless Hedge Trimmer**

**New**

18V LXT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	500 mm (19-5/8")
Max Cutting Capacity	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,000
Continuous Use (min.)	w/ BL1860B: 75
Dimensions (L x W x H)	897 x 207 x 185 mm (35-1/4 x 8-1/8 x 7-1/4")
Net weight	2.5 - 2.9 kg (5.5 - 6.4 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

**DUH507F001 / Z** 500mm (19-3/4") Cordless Hedge Trimmer

New

Large main switch lever for improved switch operation

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	500 mm (19-5/8")
Effective cutting length	498 mm (19-5/8")
Max branch dia.	15 mm (9/16")
Tooth spacing	28 mm (1-1/8")
Strokes Per Minute (SPM)	2,700
Continuous Use (min.)	w/ BL1830B: 77
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 925 x 209 x 188 mm (36-1/2 x 8-1/4 x 7-3/8")
Net weight	2.7 - 3.0 kg (6.0 - 6.6 lbs.)

18V



LXT XPT

1

Blade cover, Battery, Charger, Z: Battery and Charger are sold separately

**DUH523Z** 520mm (20-1/2") Cordless Hedge Trimmer

User-replaceable blade

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade length	520mm (20-1/2")
Strokes Per Minute (SPM)	2,700
Tooth spacing	26mm (1")
Sound Power Level	84.3 dB(A)
Dimensions (L x W x H)	938x195x193mm (37"x7-5/8"x7-5/8")
Max Output	210W
Net weight	3 - 3.4kg (6.7 - 7.5lbs)

18V



LXT XPT

1

Fast Charger, Battery Cartridge, Blade Cover, Z: Battery and Charger are sold separately

**UH353DSA / DWA / DZ**  
350mm (13-3/4") Cordless Hedge Trimmer

Lightweight, Low Vibration, Low Noise

Li-ion Ah 4.0 | 2.0 | 1.5



Max Output Power	170W
Cycles Per Minute (cpm)	1,650
Strokes Per Minute (SPM)	3,300
Cutting width	350 mm (13-3/4")
Max Cutting Capacity	15mm (9/16)
Dimensions (L x W x H)	693 x 175 x 165mm (27-1/4 x 6-7/8 x 6-1/2)
Net weight	2 - 2.1 kg (4.3 - 4.7 lbs.)

12Vmax



CXT XPT

2

Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

**DUN600LZ** 600mm (23-5/8") Cordless Pole Hedge Trimmer

18V LXT BL Brushless Cordless Pole Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	23.5 mm (15/16")
Sound Pressure Level	82.5 dB(A)
Sound Power Level	93.5 dB (A)
Vibration Level	
Left hand (Front grip / Handle)	3.8 m/s2
Right hand (Rear grip)	2.7 m/s2
Strokes Per Minute (SPM)	High / Med / Low: 4,400 / 3,600 / 2,000
Overall length	2,050 mm
Net weight	4.4 kg (9.7 lbs.)

18V



LXT BL XPT

1

Blade Cover, Harness, Battery, Charger, Z: Battery and Charger are sold separately

**DUN500WZ** 500mm (19-3/4") Cordless Pole Hedge Trimmer

18V LXT BL Brushless Cordless Pole Hedge Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	500 mm (19-3/4")
Max Cutting Capacity	23.5 mm (15/16")
Sound Pressure Level	81.5 dB(A)
Sound Power Level	92.5 dB (A)
Vibration Level	
Left hand (Front grip / Handle)	4.7 m/s2
Right hand (Rear grip)	2.5 m/s2 or less
Strokes Per Minute (SPM)	High / Med / Low: 4,400 / 3,600 / 2,000
Overall length	2,115 mm
Net weight	4.5 kg (9.9 lbs.)

18V



LXT BL XPT

1

Blade Cover, Harness, Battery, Charger, Z: Battery and Charger are sold separately

**DUN461WSF / WZ**  
460mm (18-1/8") Cordless Pole Hedge Trimmer

Telescopic pipe for no need of stepladders

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Continuous Use (min.)	w/ BL1830B: 60
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 - 99 x 3-7/16 x 5-1/4")
Net weight	w/ BL1860B: 3.4 kg (7.5 lbs.)

18V



LXT XPT

1

Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

**UN460WDA / WDZ**  
460mm (18-1/8") Cordless Pole Hedge Trimmer

12Vmax LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer

Li-ion Ah 4.0 | 2.0 | 1.5



Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 x 99 x 3-7/16 x 5-1/4")
Net weight	3.0 kg (6.6 lbs.)

12Vmax



CXT XPT

1

Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately



**UH201DWA / DZ**  
200mm (7-7/8") Cordless Hedge Trimmer

12Vmax CXT Li-Ion Cordless 20 cm (7-7/8") Hedge Trimmer

Li-ion Ah 4.0 2.0 1.5

Blade Length	200 mm (7-7/8")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	504 x 120 x 131 mm (19-7/8"x4-3/4"x5-1/8")
Net Weight	1.3 - 1.5 kg (2.8 - 3.3 lbs)



12Vmax



Base Frame, Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

**DUM604SF / Z** 160mm (6-5/16") Cordless Grass Shear

18V LXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear

Li-ion Ah 6.0 5.0 3.0 1.5

Cutting Width	160 mm (6-5/16")
Depth Adjustment	15, 20, 25 mm (9/16", 13/16", 1")
Strokes Per Minute (SPM)	2,500
Continuous Use (min.)	with BL1860B / BL1850B / BL1840B / BL1830B / BL1820B / BL1815N: 250 / 200 / 160 / 125 / 80 / 60
Dimensions (L x W x H)	337x177x131 mm (13-1/4"x7"x5-1/8")
Net weight	1.4 - 1.8 kg (3.2 - 4.0 lbs)



18V



Grass Receiver, Blade Cover, Z: Battery and Charger are sold separately

**Tool-less blade change system**

- Grass shear blade can be removed / installed without tool.
- Hedge trimmer blade can be removed / installed by using a coin to loosen / tighten two screws.



**DUM111SYX** 110mm Cordless Grass Shear

11 cm cutting width for optimum performance

Li-ion Ah 6.0 5.0 3.0 1.5

Cutting Width	110 mm
Strokes Per Minute (SPM)	2,500
Continuous Use (min.)	with BL1860B / BL1850B / BL1830B / BL1820B / BL1815N: - / - / - / - / 45
Dimensions (L x W x H)	333 x 120 x 131 mm
Net weight	1.4 - 1.7 kg (3.2 - 3.8 lbs)



18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

**UM600DSYEX / DWA / DZ** 160mm (6-5/16") Cordless Grass Shear

12Vmax CXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear

Li-ion Ah 4.0 2.0 1.5

Cutting Width	160 mm (6-5/16")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	329x177x131 mm (13"x7"x5-1/8")
Net Weight	1.3 - 1.5 kg (2.8 - 3.3 lbs)



UM600DSYEX



12Vmax



Base Frame, Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

**UR012GZ04** Cordless Grass Trimmer

80Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

Cutting Width	Metal Blade: 305 mm
	TCT Saw Blade: 255 mm
No Load Speed (RPM)	Chisel Blade: 225 mm
	Nylon Cutting Head: 480 mm
Spindle Size	Shredder Blade: 270 mm
	Plastic Blade: 305 mm
Net weight	Metal Blade (3/2/1): 0 - 6,800 / 0 - 5,000 / 0 - 3,500
	Nylon Cutting Head (3/2/1): 0 - 5,000 / 0 - 4,200 / 0 - 3,500
	Plastic Blade (3/2/1): 0 - 6,800 / 0 - 5,000 / 0 - 3,500
	M10 x 1.25 LH
	8.0 - 9.3 kg (17.6 - 20.5 lbs)



40Vmax x2



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

**UR013GZ03** Cordless Grass Trimmer

40Vmax XGT BL AFT Cordless Grass Trimmer, Bike Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

Cutting Width	Metal Blade: 255 mm
	Chisel Blade: 225 mm
No Load Speed (RPM)	Nylon Cutting Head: 450 mm
	Shredder Blade: 270 mm
Spindle Size	Plastic Blade: 305 mm
	M10 x 1.25 LH
Net weight	Dimensions 1,905 x 688 x 574 mm (75" x 27" x 22-5/8")
	5.9 - 7.3 kg (13.0 - 16.1 lbs)



40Vmax



Metal blade / Nylon cutting head / Plastic blade (country-specific), Tool cover (country-specific), Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

## UR008GM101(RM) / GZ01 Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



<b>Cutting Width</b>	Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
<b>No Load Speed (RPM)</b>	Nylon Cutting Head (3/2/1): 0 - 5,000 / 0 - 4,600 / 0 - 4,000 Plastic Blade (3/2/1): 0 - 6,000 / 0 - 4,600 / 0 - 4,000
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	w/o Cutting Tool, w/o Battery: 1,803 x 224 x 300 mm (71 x 8-7/8 x 11-3/4")
<b>Net weight</b>	5.0 - 5.7 kg (11.0 - 12.6 lbs.)

40Vmax



Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench, Battery, Charger,  
Z: Battery and Charger are sold separately

## UR003GZ Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



<b>Cutting Width</b>	Metal Blade: 230 mm (9") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
<b>No Load Speed (RPM)</b>	High / Mid / Low: 0 - 6,500 / 5,300 / 3,500
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	w/o Cutting Tool, w/BL4020 /BL4025 / BL4040: 1,735 x 355 x 230 mm (68-1/4 x 14 x 9")
<b>Net weight</b>	4.1 - 4.7 kg (9.0 - 10.4 lbs.)

40Vmax



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

## UR017GZ Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 5.0 4.0 2.5 2.0



<b>Cutting Width</b>	Metal blade: 230 mm (9") Nylon cutting head: 330 mm (13") Plastic Blade: 230 mm (9")
<b>No Load Speed (RPM)</b>	High / Med. / Low: 6,500 / 5,300 / 3,500
<b>Dimensions (L x W x H)</b>	1,890 x 362 x 265 mm (74-1/2 x 14-1/4 x 10-3/8")
<b>Net weight</b>	3.9 kg

40Vmax



Nylon cutting head, Plastic blade, Shoulder belt, Box driver, Hex wrench, Accessory bag, Battery, Charger,  
Z: Battery and Charger are sold separately



## UR202CZ Battery Powered Grass Trimmer

BL ADT AFT Battery Powered 3-Speed Grass Trimmer



<b>Cutting Width</b>	Nylon cutting head: 430 mm (17") Plastic blade: 305 mm (12")
<b>No Load Speed (RPM)</b>	Nylon cutting head (3 / 2 / 1): 0 - 5,000 / 0 - 4,600 / 0 - 4,000
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	1,783 x 226 x 300 mm (70-1/4 x 8-15/16 x 11-7/8")
<b>Net weight</b>	5.5 - 6.1 kg (12.1 - 13.5 lbs.)

40Vmax



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

## DUR369LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Metal Blade: 255 mm (10") Trimmer Head: 430 mm (17") Plastic Blade: 305 mm (12")
<b>No Load Speed (RPM)</b>	High / Med / Low: 3,300 / 2,000 / 5,500 / 4,600
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	1,846 x 400 x 269 mm (72-1/2 x 15-3/4 x 10-5/8")
<b>Net weight</b>	5.8 - 6.4 kg (12.8 - 14.1 lbs.)

18V x2



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Shoulder Belt, Battery, Charger

## DUR368LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Metal Blade: 255 mm (10") Trimmer Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
<b>No Load Speed (RPM)</b>	High / Med / Low: 6,500 / 5,300 / 3,500
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Sound Power Level</b>	4-Tooth Blade: 89.2 dB(A) Nylon Cutting Head: 89 dB(A)
<b>Dimensions (L x W x H)</b>	1,758 x 362 x 231 mm (69-1/4 x 14-1/4 x 9-1/8")
<b>Net weight</b>	3.9 - 4.5 kg (8.6 - 10.0 lbs.)

18V x2



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

## DUR190LZX3 Cordless Grass Trimmer

One protector for metal blade / plastic blade / trimmer head

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Nylon Cutting Head: 300 mm (11-3/4") Metal Blade: 230 mm (9") Plastic Blade: 255 mm (10")
<b>No Load Speed (RPM)</b>	3,500 - 6,000
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	1,836 x 348 x 236 mm (72-1/4 x 13-3/4 x 9-1/4")
<b>Net weight</b>	2.9 - 3.2 kg (6.4 - 7.1 lbs.)

18V



Safety Goggles, Band Assembly, Tipped Saw, Accessory Bag, Box Driver, Hex Wrench, Cap. Tool Cover, Battery,  
Z: Battery and Charger are sold separately

**DUR189Z Cordless Grass Trimmer**

18V LXT BL ADT Cordless Grass Trimmer, Short Telescopic Pipe, Loop Handle

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Trimmer Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
<b>No Load Speed (RPM)</b>	High / Mid / Low / ADT Mode: 6,000 / 5,000 / 4,000 / 4,000 - 6,000
<b>Spindle Size</b>	M8 x 1.25 RH
<b>Max Run Time (min)</b>	Nylon Cutting Head, BL1860B: 168 Plastic Blade, BL1860B: 219
<b>Net weight</b>	3 - 3.3 kg (6.6 - 7.3 lbs.)

18V



LXT BL ADT XPT



Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately



Photo: DUR193

**Angle adjustment of motor head**  
Angle adjustment button  
Can be adjusted in 5 steps.

**30% improvement in nylon cord durability**

**DUR194SFX2 Cordless Grass Trimmer**

18V LXT Li-Ion Cordless 2-Speed Grass Trimmer, Loop Handle

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Metal Blade: 200 mm (7-7/8") Trimmer Head: 280 mm (11") Plastic Blade: 230 mm (9")
<b>No Load Speed (RPM)</b>	High / Low: 6,000 / 4,500
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Dimensions (L x W x H)</b>	1,630 x 288 x 236 mm (64 x 11-3/8 x 9-1/4")
<b>Net weight</b>	2.6 - 2.9 kg (5.7 - 6.4 lbs.)

18V



LXT XPT



Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Hex Wrench, Box Driver, Accessory Bag, Battery, Charger, Z: Battery and Charger are sold separately

**DUR193SF / Z Cordless Grass Trimmer**

18V LXT Li-Ion Cordless Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Trimmer Head: 260 mm (10-1/4")
<b>No Load Speed (RPM)</b>	7,800
<b>Max Run Time (min)</b>	w/ BL1830B: 45
<b>Dimensions (L x W x H)</b>	1,194 - 1,384 x 271 x 372 mm (47 - 54-1/2 x 10-5/8 x 14-5/8")
<b>Net weight</b>	2.4 - 2.7 kg (5.3 - 6.0 lbs.)

18V

LXT XPT



Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Hex Wrench, Box Driver, Accessory Bag, Battery, Charger, Z: Battery and Charger are sold separately

**DUR181Z Cordless String Trimmer**

18V LXT Li-Ion Cordless String Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



<b>Cutting Width</b>	Trimmer Head: 260 mm (10-1/4")
<b>No Load Speed (RPM)</b>	7,800
<b>Sound Power Level</b>	88.5 dB(A)
<b>Dimensions (L x W x H)</b>	1,229 - 1,433 x 267 x 186 - 257 mm (48-1/2 - 56-1/2" x 10-1/2" x 7-3/8 - 10-1/8")
<b>Max Run Time (min)</b>	with BL1830B: 45
<b>Net weight</b>	2.8 - 3.1 kg (6.2 - 6.9 lbs)

18V

LXT



Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Battery, Fast Charger, Z: Battery and Charger are sold separately

**UR100DWA / DZ Cordless Grass Trimmer**

Compact size is ideal for trimming and precise edging

Li-ion Ah 4.0 2.0 1.5



<b>Cutting Width</b>	Nylon Cutting Head: 260 mm (10") Plastic Blade: 230 mm (9")
<b>No Load Speed (RPM)</b>	10,000
<b>Spindle Size</b>	M8 x 1.25 RH
<b>Dimensions (L x W x H)</b>	835-1,195 x 267 x 210-315
<b>Net weight</b>	1.9 - 2.1 kg (4.3 - 4.6 lbs.)

12Vmax



CX1 XPT



Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charger, DZ: Battery and Charger are sold separately

**UR3000 300mm (11-3/4") String Trimmer**

Lightweight AC string trimmers for do-it-yourselfers



<b>Continuous Rating Input</b>	450W
<b>Cutting Width</b>	300 mm (11-3/4")
<b>No Load Speed (RPM)</b>	9,000
<b>Sound Power Level</b>	96 dB(A)
<b>Dimensions (L x W x H)</b>	1,016 - 1,256 x 301 x 262 mm (40 - 49-1/2" x 11-7/8" x 10-3/8")
<b>Net Weight</b>	2.6kg (5.7lbs)
<b>Power Supply Cord</b>	10m



Extension Cord with Lock, Shoulder Strap, Safety Goggles, Nylon Cord

**LM004JZ** 530mm (21") Cordless Lawn Mower

**New**

3 cutting modes (Normal/ Soft no-load/ Noise reduction)

Li-ion Ah 10.0 4.0



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	2,300 - 2,800
Propelling speed	1.5 - 6.5 km/h39
Wheel diameter	230 / 230 mm (9 / 9")
Dimensions (L x W x H)	1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
Net weight	31.5 - 34.6 kg (69.5 - 76.3 lbs.)

64Vmax



Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

**LM002JM101** 530mm (21") Cordless Lawn Mower

High power cordless lawn mower powered by 64Vmax (57.6V) Li-Ion battery

Li-ion Ah 10.0 4.0



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	2,300 - 2,800
Actual Mowing Area	1,600 m <sup>2</sup>
Continuous Use (min.)	39
Vibration Level	2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	1,710 - 1,800 x 585 x 985 - 1,115 mm (67-1/2 - 71 x 23 x 38-3/4 - 44")
Net weight	25.7 - 27.6 kg

64Vmax



Blade, Mulching Plug, Socket Wrench, Rod, Battery, Charger

**BL6440**

Powerful battery optimized for the Makita battery powered lawn mower



Powered by 64Vmax Li-Ion battery

**64Vmax** Li-ion

Handle height adjustment



Grass level indicator



Control panel

3 cutting modes

- (No load speed)
- Normal mode  
LM001J: 3,200  
LM002J: 2,800
- Soft no-load mode  
LM001J: 2,500 / 3,200  
LM002J: 2,300 / 2,800
- Noise reduction mode  
LM001J: 2,500  
LM002J: 2,300

Main switch



Tool-less foldable handle



Can be stored vertically




Plastics Deck



photo: LM002J

Higher mowing performance



The blade is designed so that it tilts towards the front side of the mower when attached, preventing double-cutting for reduced current consumption.



Optimum blade design for less rotational speed reduction of the blade

BL MOTOR



XPT



IPX4-rated water-resistance

LM001J  
Mowing area  
**1,400 m<sup>2</sup>**

LM002J  
Mowing area  
**1,600 m<sup>2</sup>**

Cutting width  
LM001J: **480mm**  
LM002J: **534mm**

10 cutting height settings from 20mm to 100mm



Collecting	Mulching	Rear discharge	Side discharge
✓	✓	✓	-

**LM001JM101** 480mm (18-7/8") Cordless Lawn Mower


High power cordless lawn mower powered by 64Vmax (57.6V) Li-Ion battery

Li-ion Ah 10.0 4.0



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	62 L
No Load Speed (RPM)	2,500 - 3,200
Actual Mowing Area	1,400 m <sup>2</sup>
Continuous Use (min.)	34
Vibration Level	2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	1,600 - 1,680 x 540 x 955 - 1,080 mm (63 - 66 x 21-1/4 x 37-1/2 - 42-1/2")
Net weight	24.4 - 26.1 kg

64Vmax



Blade, Mulching Plug, Socket Wrench, Rod, Battery, Charger

**LM002GZ** 530mm (21") Cordless Lawn Mower

**New**

40Vmax XGT BL Cordless 53 cm (21") Self-Propelled Lawn Mower

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	2,300 - 2,800
Propelling speed	1.5 - 5.0 km/h
Wheel diameter	230 / 230 mm (9 / 9")
Dimensions (L x W x H)	During operation: 1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
Net weight	29.5 - 34.7 kg (65.0 - 76.5 lbs.)

40Vmax



Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

**LM001GZ** 480mm (18-7/8") Cordless Lawn Mower **New**

40Vmax XGT BL Cordless 48 cm (18-7/8") Self-Propelled Lawn Mower

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	62 L
No Load Speed (RPM)	2,500 - 3,200
Propelling speed	1.5 - 5.0 km/h
Wheel diameter	230 / 230 mm (9 / 9")
Dimensions (L x W x H)	During operation: 1,670 - 1,745 x 550 x 965 - 1,075 mm (65-3/4 - 68-3/4 x 21-5/8 x 38 - 42-1/4")
Net weight	28.0 - 33.0 kg (61.7 - 72.8 lbs.)

40Vmax



Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

**LM001CZ** 534mm (21") Battery Powered Lawn Mower

Mows 5,700 m<sup>2</sup> with PDC1200



Cutting Width	534mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ PDC01, Self-Propelled: 1,700 m <sup>2</sup> w/ PDC01, push-drive: 2,300 m <sup>2</sup> w/ PDC1200, Self-Propelled: 4,200 m <sup>2</sup> w/ PDC1200, push-drive: 5,700 m <sup>2</sup>
Continuous Use (min.)	w/ PDC01, Self-Propelled: 40 w/ PDC01, push-drive: 50 w/ PDC1200, Self-Propelled: 100 w/ PDC1200, push-drive: 130
Dimensions (L x W x H)	1,630 - 1,715 x 590 x 990 - 1,095 mm
Net weight	41.9 - 49.2 kg (92.4 - 108.5 lbs.)

40Vmax



Blade, Mulching plug, Side discharge mouth, Socket wrench, Rod

**DLM539Z** 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,000
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ BL1860B x2, Self-Propelled: 700 m <sup>2</sup> w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use (min.)	w/ BL1860B x2, Self-Propelled: 22 w/ BL1860B x2, Push-Drive: 25
Dimensions (L x W x H)	During Operation: 1,810 - 1,870 x 580 x 920 - 1,040 mm
Net weight	28.0 - 30.5 kg

18V x2



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM538Z** 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,000
Actual Mowing Area	w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use (min.)	w/ BL1860B x2, Push-Drive: 25
Dimensions (L x W x H)	During Operation: 1,810 - 1,870 x 580 x 920 - 1,040 mm
Net weight	25.6 - 28.1 kg (56.4 - 61.9 lbs.)

18V x2



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM533Z** 534mm (21") Cordless Lawn Mower

18V X2 (36V) LXT BL Cordless 53 cm (21") Self-Propelled Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Dimensions (L x W x H)	1,655 - 1,740 x 590 x 990 - 1,100 mm (65"-68-1/2" x 23-1/4" x 39"-43-1/4")
Net weight	42.8 - 46.7 kg (94.4 - 103 lbs.)

18V x2



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM532Z / DLM530Z** 534mm (21") Cordless Lawn Mower

18V X2 LXT BL Brushless Cordless Self-Propelled Lawn Mower (DLM532 only)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Dimensions (L x W x H)	1,630 - 1,715 x 590 x 990 - 1,190 mm (64"-67-1/2" x 23-1/4" x 39"-46-3/4")
Net weight	DLM530Z: 35.5 - 39.3 kg (78.3 - 86.6 lbs.) DLM532Z: 39.0 - 42.8 kg (86.0 - 94.4 lbs.)

18V x2



Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM481Z** 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,100
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ BL1860B x2, Self-Propelled: 650 m <sup>2</sup> w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use (min.)	w/ BL1860B x2, Self-Propelled: 23 w/ BL1860B x2, Push-Drive: 28
Dimensions (L x W x H)	During Operation: 1,690 - 1,740 x 530 x 930 - 1,060 mm
Net weight	27.1 - 29.3 kg

18V x2



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM480Z** 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,100
Actual Mowing Area	w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use (min.)	w/ BL1860B x2, Push-Drive: 28
Dimensions (L x W x H)	During Operation: 1,690 - 1,740 x 530 x 930 - 1,060 mm
Net weight	24.5 - 26.8 kg (54.0 - 59.1 lbs.)

18V x2



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM462Z** 460mm (18") Cordless Lawn Mower

18V X2 LXT BL Brushless Cordless 46 cm (18") Self-Propelled Lawn Mower

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	460 mm (18")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,500 - 3,300
Propelling speed	2.5 - 5.0 km/h
Dimensions (L x W x H)	1,610-1,690x535x 980-1,095 mm (63-1/2"-66-1/2"x 21"x38-1/2"-43")
Net weight	35.3 - 39.0 kg (77.8 - 86.0 lbs.)

18V x2



LXT BL XPT 1

Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**DLM460Z** 460mm (18") Cordless Lawn Mower

Brushless Cordless 46 cm (18") 3-in-1 Mower

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Type	2 Tooth
Hole Diameter	10.0 mm (3/8")
Cutting Width	460 mm (18")
Cutting Height	20-75 mm (13/16"-2-5/16")
No Load Speed (RPM)	2,500 - 3,300
Recommended mowing area	w/ BL1860B x2: 800 - 1,600 m <sup>2</sup>
Continuous Use (min.)	w/ BL1860B / BL1850B / BL1840B/BL1830B/BL1820B/ BL1815N21/18/14/10/8/6
Sound Power Level	91 dB(A)
Dimensions (L x W x H)	1,319-1,518x532x 879-1,138 mm
Net weight	25.3 - 27.6 kg (55.8 - 60.8 lbs.)

18V x2



LXT BL XPT 1

Blade, Socket Wrench, Battery, Fast Charger, Z: Battery and Charger are sold separately

**DLM432Z** 430mm (17") Cordless Lawn Mower

2-in-1 Mower

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	430 mm (17")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	1,435-1,490x460x 1,005-1,045 mm (56-1/2"-58-3/4"x18- 1/8"x39-1/2"-41-1/4")
Net weight	16.8 - 17.5 kg (36.6 - 38.6 lbs.)

18V x2



LXT XPT 1

Blade, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**DLM382CF2 / Z** 380mm (15") Cordless Lawn Mower

2-in-1 Mower

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	1,380-1,410x450x 985-1,005 mm (54-1/4"-55-1/2"x17- 3/4"x38-3/4"-39-1/2")
Net weight	16.2 - 16.9 kg (35.7 - 37.3 lbs.)

18V x2



LXT XPT 1

Blade, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**DLM330RG / Z** 330mm (13") Cordless Lawn Mower

18V LXT Li-Ion Cordless 330 mm (13") 3 in 1 Lawn Mower

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	330 mm (13")
Cutting Height	20 - 75 mm (13/16" - 2-15/16")
Grass Box Capacity	30 L
No Load Speed (RPM)	4,300
Actual Mowing Area	w/ BL1840B: 270 m <sup>2</sup>
Continuous Use (min.)	w/ BL1840B: 14
Wheel Size	Front / Rear: 140 / 180 mm (5-1/2" / 7-1/8")
Dimensions (L x W x H)	During Operation: 1,285 - 1,350 x 375 x 935 - 975 mm, When Stored (w/o Grass Box): 520 x 375 x 775 mm
Net weight	11.6 - 12.5 kg

18V



LXT XPT 1

Blade, Mulching Plug, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

**DLM230RG / Z** 230mm (9") Cordless Lawn Mower

18V LXT Cordless 23 cm (9") 2-in-1 Lawn Mower

Li-ion 6.0 5.0 3.0 1.5



Cutting Width	230 mm (9")
Cutting Height	10 - 55 mm
Grass Box Capacity	20 L
No Load Speed (RPM)	7,000
Actual Mowing Area	w/ BL1830B: 90 m <sup>2</sup>
Continuous Use (min.)	w/ BL1830B: 6 min
Wheel Diameter	130 / 55 mm
Dimensions (L x W x H)	During Operation: 860 - 1,105 x 256 x 680 - 920 mm, When Stored (w/o Grass Box): 264 x 363 x 780 mm
Net weight	8.6 - 8.9 kg

18V



LXT XPT 1

Blade, Hex wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

**ELM4620** 460mm (18-1/8") Electric Lawn Mower

1,800N 4-in-1 Electric Mower



Continuous rating input	1,800W
Cutting Width	460 mm (18-1/8")
Cutting Height	20-75mm (13/16"-2-15/16")
No Load Speed (RPM)	2,950
Recommended mowing area up to	800 m <sup>2</sup>



1

Blade, Wrench, Mulch Plug

**ELM4121** 410mm (16-1/8") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input	1,600W
Cutting Width	410 mm (16-1/8")
Cutting Height	20-75mm (13/16"-2-15/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	600 m <sup>2</sup>



1

Blade, Wrench, Mulch Plug, Side Discharge Mouth

**ELM3720 370mm (14-1/2") Electric Lawn Mower**

Stays upright for easy maintenance and cleaning



Continuous rating input	1,400W
Cutting Width	370 mm (14-1/2")
Cutting Height	20-55mm(13/16"-2-3/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	500 m <sup>2</sup>



Blade, Wrench

**ELM3320 330mm (13") Electric Lawn Mower**

Stays upright for easy maintenance and cleaning



Continuous rating input	1,200W
Cutting Width	330 mm (13")
Cutting Height	20-55mm(13/16"-2-3/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	400 m <sup>2</sup>



Blade, Wrench

**DUP361ZN 33mm (1-5/16") Cordless Powered Pruning Shears**

Smooth cutting similar to that of a hand pruner



Li-ion Ah 6.0 5.0 3.0 1.5

Max Output	200W
Capacity	Max cutting : 33mm Max blade opening: 54mm
Dimensions (L x W x H)	305x43x106mm (12"x1-11/16"x4-3/16")
Net weight	0.8 kg (1.8 lbs.)

18V x2 **LXT XPT**

Oil supply, Wrench set, Diamond file, Cord holder complete (for waist belt), Holster, Harness, Arm band, Tool bag, Shear blade (U), Battery, Fast Charger, Z: Battery and Charger are sold separately



**DUS158Z 15L Cordless Garden Sprayer**

**New**

WetGuard; Excellent water-resistant performance

Li-ion Ah 6.0 5.0 3.0 1.5



Max Pressure	0.5 MPa
Chemical tank	15 L
Hose Length	1.7 m
Continuous Use (min.)	Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180
Dimensions (L x W x H)	325 x 237 x 517 mm (12-3/4 x 9-3/8 x 20-3/8")
Net weight	4.6 kg (10.1 lbs.)

18V **LXT WG**

Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger, Z: Battery and Charger are sold separately

**DUS108Z 10L Cordless Garden Sprayer**

**New**

WetGuard; Excellent water-resistant performance

Li-ion Ah 6.0 5.0 3.0 1.5



Max Pressure	0.5 MPa
Chemical tank	10 L
Hose Length	1.7 m
Continuous Use (min.)	Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180
Dimensions (L x W x H)	325 x 237 x 439 mm (12-3/4 x 9-3/8 x 17-1/4")
Net weight	4.6 kg (10.1 lbs.)

18V **LXT WG**

Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger, Z: Battery and Charger are sold separately

**DUS054Z 5L Cordless Garden Sprayer**

Two head nozzles for a wide range of spray

Li-ion Ah 6.0 5.0 3.0 1.5



Max Pressure	0.3 MPa (3 kgf/cm <sup>2</sup> )
Chemical tank	5 L
Hose Length	1.7 m
Continuous Use (min.)	Spray Single: w/ BL1860B: 530 min
Dimensions (L x W x H)	340 x 183 x 360 mm (13-3/8 x 7-1/4 x 14-1/8")
Net weight	2.1 kg (4.6 lbs.)

18V **LXT XPT**

Shoulder Harness, Holder, Battery, Charger, Z: Battery and Charger are sold separately

**US053DZ 5L Cordless Garden Sprayer**

12Vmax CXT Li-Ion Cordless 5 L Garden Sprayer

Li-ion Ah 4.0 2.0 1.5



Max Pressure	0.3 MPa (3 kgf/cm <sup>2</sup> )
Chemical tank	5 L
Hose Length	1.7 m
Continuous Use (min.)	Spray Single: w/ BL1041B : 250
Dimensions (L x W x H)	340 x 183 x 335 mm (13-3/8 x 7-1/4 x 13-1/4")
Net weight	2.0 kg

12Vmax **CXT XPT**

Shoulder Harness, Holder, Battery, Charger, DZ: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

**DVF154Z 15L Cordless Garden Sprayer**

Environmentally-friendly with no emission and extremely low noise

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Max pressure	0.3Mpa (3kgf/cm <sup>2</sup> )
Chemical tank	15L
Dimensions (L x W x H)	345x235x525mm (13-5/8"x9-1/4"x20-3/4")
Net weight	4.1 - 4.5kg (9.1 - 9.7lbs)



18V LXT

Y-shaped Double Nozzle, Wide Angle Nozzle, Spray Pipe Holder, Shoulder Harness, Z: Battery and Charger are sold separately

**DVF104Z 10L Cordless Garden Sprayer**

Environmentally-friendly with no emission and extremely low noise

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Max pressure	0.3Mpa (3kgf/cm <sup>2</sup> )
Chemical tank	10L
Dimensions (L x W x H)	315x225x415mm (12-3/8"x8-7/8"x16-3/8")
Net weight	3.8 - 4.1kg (8.4 - 9.1lbs)



18V LXT

Y-shaped Double Nozzle, Wide Angle Nozzle, Spray Pipe Holder, Shoulder Harness, Z: Battery and Charger are sold separately

**DG001GZ02 Cordless Earth Auger**

Lightweight design for reduced operator fatigue

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Dimensions (L x W x H)	836 x 605 x 199 mm (33 x 23-3/4 x 7-7/8")
Net weight	7.2 - 8.1 kg (15.9 - 17.9 lbs.)



40Vmax



BL ADT XPT

Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately

**DDG460ZX4 Cordless Earth Auger**

Battery powered and powerful

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 350
Max Fastening Torque	High: 48 N·m (430 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Vibration Level	2.5 m/s <sup>2</sup> or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
Net weight	7.3 - 8.2 kg (16.1 - 18.1 lbs.)



18V x2



LXT BL ADT XPT

Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately



photo: DG001G



**Reversing switch**

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



**Torque limiter**

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.


Work amount  
depth 600mm / BL4040 / on full battery charge / low speed mode

ø150mm

about **100** holes  
ø200mm

about **65** holes

**For larger holes**



**High power  
Brushless motor**



**No power outlet required,  
No water source required.**

Cars, walls, steps, etc. can be cleaned anywhere at any time.

**Storage example**



**Working Pressure**  
**5.5 / 3.0**  
(High / Low) MPa

Cyclone jet nozzle set  
Wash brush set

Variospray lance set

Foam nozzle set

Variable nozzle set

Pipe cleaning hose

Under body spray lance set

Rotating brush set


Max tank capacity about **50L**

Photo: DHW080

Free from cord



Supplying water from a tank/reservoir



Optional accessories can be purchased separately.

**DHW080ZK Cordless High Pressure Washer**

18V X2 LXT BL Cordless 8 MPa High Pressure Washer

Li-ion 6.0 5.0 3.0 1.5



Max Pressure	8.0 MPa (N/A bars)
Max Flow Rate	380 L/h (6.3 L/min)
Pump Speed (RPM)	High / Low: 3,450 / 2,390
Max Feed Temperature	40 °C (N/A °F)
Max Suction Height	1 m (3.3 ft.)
High Pressure Hose Length	5 m (16 ft.)
Sound Power Level	70.9 dB(A)
Dimensions (L x W x H)	438x218x269 mm (17-1/4"x8-5/8"x10-5/8")
Net weight	7.1 - 7.7 kg (15.6 - 17.0 lbs.)

18V x2



Trigger Gun, High Pressure Hose 5 m, Suction Hose, Cleaner Pin, Storage Box, Variable nozzle, Connector, One touch joint, Battery, Charger, Z: Battery and Charger are sold separately



**HW102 High Pressure Washer**

Lightweight and compact power washer for home use



Continuous Rating Input	1,300W
Max Pressure	100bar (1,450 PSI)
Max Flow Rate	360 L/hr
Motor Type	Universal
Sound Power Level	94dB(A)
Max Input Temperature	50°C
High Pressure Hose Length	5m
Net Weight	5.8kg (5.0lbs)



**HW1300 High Pressure Washer**

High Pressure Washer with Self-Priming Function

203



Continuous Rating Input	1,800W
Max Pressure	13MPa
Max Flow Rate	450 L/hr
Max Feed Temperature	40 °C (104 °F)
Sound Pressure Level	76 dB(A)
High Pressure Hose Length	10m
Dimensions (L x W x H)	292x358x830 mm (11-1/2"x14-1/8"x32-3/4")
Net Weight	12.7 kg (28.0 lbs.)
Cord Length	5m



Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

**HW132 High Pressure Washer**

Steel reinforced spray gun



Continuous rating input	2,100W
Max Pressure	14 MPa (140 bar, 2,030 PSI)
Net weight	18.8 kg (41.4 lbs)



**HW151 High Pressure Washer**

Compact design, large operating range and efficient cleaning performance



Continuous Rating Input	2,500W
Max Pressure	150MPa (2,175 PSI)
Max Flow Rate	500 L/hr
Motor Type	Induction
Sound Power Level	88dB(A)
Max Input Temperature	50°C
High Pressure Hose Length	10m(32.8ft)
Net Weight	26.9kg (23.3lbs)




## Earth auger drill bit with adapter D shank



Suitable for drilling sandy soil and soil which contains grassroots and pebbles. Used for topdressing · tree planting to fruit trees and also for drilling prepared hole which needs for hammering in various types of pile.


## Earth auger drill bit

Diameter	Length	Working Length	Part No.
ø100 mm	800 mm	550 mm	E-07294
ø150 mm			E-07303
ø200 mm			E-07319

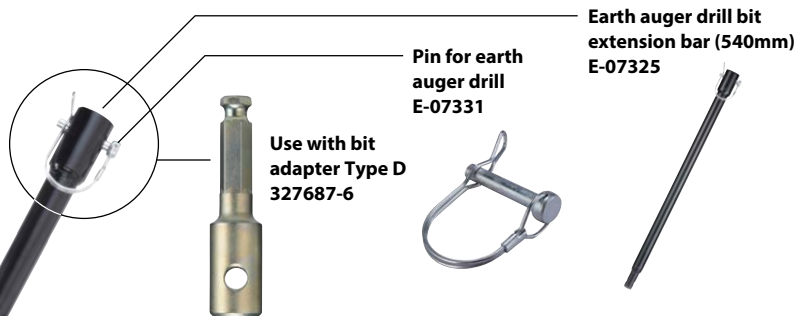

Compared to our conventional product which only has one spiral groove, this new product has two spiral groove which make drilling more stable. It also leads to 10% increase on drilling speed compared to the conventional product.

**Two different types of cutting edge shape (flat cutter and sharp cutter) makes it possible to deal with various soil.**

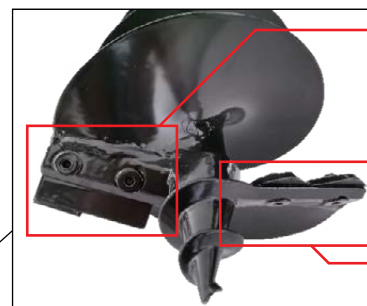

## Flat cutter



Flat cutter is suitable for soil with grassroots

## Sharp cutter



Sharp cutter is suitable for soil with pebbles.














## Blade for earth auger drill bit


(Changing cutter blade set)


Diameter	Part No.
For 100 mm	E-07630
For 150 mm	E-07646
For 200 mm	E-07652

\*Diameter 200mm is used only for sandy soil.

### Blade selection guide

Blade type / Image					
		Short and soft grass	Tall and hard grass	Bush including tree beginning to grow	
Nylon cord		←→			
Plastic blade		←→			
Metal blade		←→			
		←→			
			←→		
Brushcutter blade			←→		
Shredder blade			←→		
Saw blade				←→	
Chisel blade				←→	
T.C.T. saw blade		←→			

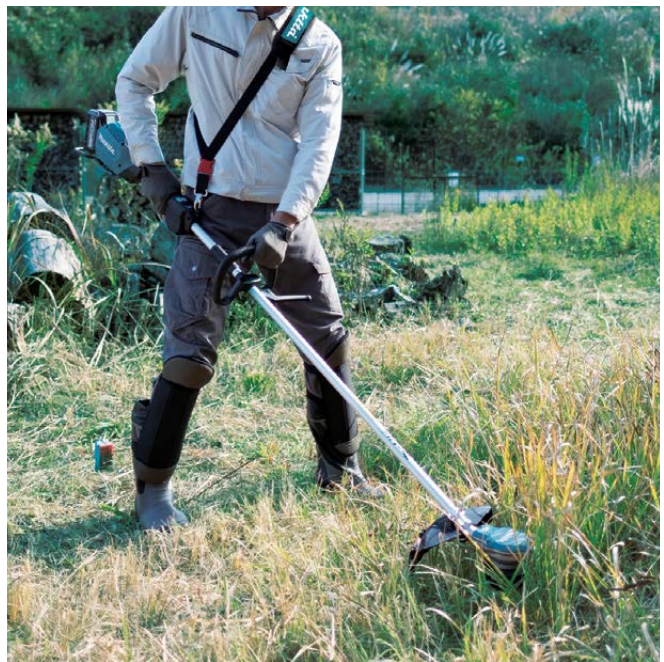

Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
<b>80-tooth blade</b>					
	for bushes and thin tree trunks Not available in some countries due to local regulation	230mm / 80	1.8mm	DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14152
		255mm / 80	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14168

**TCT Saw blade**




Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
	for gnarled bushes and thin tree trunks Not available in some countries due to local regulation	230mm / 36	1.25mm	EBH252U, EBH253U, EBH340U/R, EBH341U/L, EBH341R, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/U, EM2651L/U, EM2653LH, EM2654LH, EM4340L	D-65981
		250mm / 40	1.25mm	EBH340U/R, EBH341L/U/R, EM2901LH/UH, EM2904LH, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	A-48337 A-53958
		255mm / 4	2.0mm	EBH340U/R, EBH341L/U/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14124

**Edger blade**

Blade Dia. / No. of Teeth	Thickness	Model No.	Part No.
203mm / 2	2.5mm	EE2650H, EE400MP	196745-7

**Brushcutter blades**

Hole Dia.: 25.4mm

Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
<b>2-tooth blade</b>					
	for tall grass and scrub	230mm / 2	2.0mm	EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	197808-2 D-66058
<b>4-tooth blade</b>					
	for tall grass and scrub	230mm / 4	1.8mm	DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14118
		230mm / 4	1.8mm	DUR365U, DUR368A/L, DUR369A/L, UR101C, UR201C, EM401MP, EM402MP	D-66008
		255mm / 4	2.0mm	EBH340U/R, EBH341L/U/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14124
<b>8-tooth blade</b>					
	for thick grass and scrub	255mm / 8	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14146

Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.
<b>Quick loading Bump &amp; Feed</b>							
	96-M8L	4"	M8x1.25LH	DUR142L, DUR142U, DUR143U, DUR182L, DUR182U, DUR183L, DUR183U, DUR187L, DUR187U, DUR188L, DUR188U	2.0mm x 4m	Carton box	191D91-7
	96-M8R		M8x1.25RH	DUR189, DUR364	2.0mm x 4m	Carton box	191D92-5
	96-M10L	4"	M10x1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR201C, UR202C, DUR365, DUR366, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EM408MP, EM409MP, UR001G, UR002G, UR003G, UR004G, UR101C	2.0mm x 4m	Carton box	191D89-4
				DUR369A, DUR369L, DUR369N, EBH252L, EBH252U, EBH253L, EBH253U, EM2510L, EM2511L, EM2650U, EM2651L, EM2651U, EM2653L, EM2654L, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, UR101C, UR201C, UR202C	2.4mm x 3m	Carton box	191D90-9
21-M10L	5"	M10x1.25LH	EBH341L, EBH341U, EM4350L, EM4350R, EM4350U, EM4351U, MS335C, RBC411, RBC412U, RBC413U, RBC414U	2.4mm x 4m	Carton box	191D93-3	
<b>Bump &amp; Feed</b>							
	76-M8R	3"	M8x1.25RH	UR100D	1.65mm x 8m	Poly bag with header	198853-0
	95-M10L	4"	M10x1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR002G, UR003G, UR101C, UR201C, UR202C EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, EM408MP, EM409MP	2.0mm 3m	Poly bag with header	198892-0
2.4mm x 3m				Poly bag with header	197804-0		
<b>Bump &amp; Feed</b>							
	B & F ECO 4R	4" Low profile	M8x1.25RH	DUR189, DUR364L	2.0mm x 3m	Poly bag with header	197297-1
	B & F ECO 4L	4" Low profile	M10x1.25LH	DUR192L, DUR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, UR002G, UR003G, UR101C, UR201C, UR202C, EM408MP, EM409MP		Poly bag with header	197296-3
	B & F Z5L	5"	M10x1.25LH	EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Blister pack	B-05131
<b>Automatic feed and Bump &amp; Feed</b>							
	Ultra Auto 4R	4"	M8x1.25RH	ER2550L, ER2650L, ER2600L, ER400MP	2.4mm x 3m	Carton box	B-03006
	Ultra Auto 4L	4"	M8&10x1.25 LH	DUR187U/L, DU188U/L, EM2500U/L, EM2600U/L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Carton box	*B-02945

### String trimmer head

(for grass, light weeds)

\* with adapter (Poly bag with header)

#### Quick loading Trimmer Head (UN-74L, UN-72L, 96-M8L/R, 96-M10L, 121-M10L)

Nylon cord can be feded without opening the head




0 85(sec.)



0 35(sec.)



Up to **58%**  
less feeding time!


Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.
Quick loading Bump & Feed							
	UN-74L	4.4"	M10x1.25LH	DUR190L, DUR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EBH252U/L, EBH253U/L, EBH341U, EM3400L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR002G, UR003G, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3.6m	-	196324-1

### Cordless string trimmer







Model No.	Spindle Size	Receive Washer		Grass Guard for Receive Washer
		Size (mm)	Part No.	
DUR184L	M8x1.25RH	36.5	326683-1 144512-4	346857-8
DUR187L	M10x1.25LH	36.5	144512-4	346857-8
DUR189	M8x1.25RH	36.5	144512-4	346857-8
DUR192L, DUR190	M10X1.25LH	36.5	140W47-1	346857-8

Model No.	Spindle Size	Receive Washer		Grass Guard for Receive Washer
		Size (mm)	Part No.	
DUR364L	M8x1.25RH	44	319245-2	346857-8
DUR365U, DUR366L	M10x1.25LH	42	326518-6 140L84-9	346622-5
DUR368L	M8x1.25RH	-	140L84-9	-
DUR369L	M10X1.25LH	64.5	144312-2	-
UR202C	M10X1.25LH	65	140N88-3	-

**Line character**

Shape	Sharpness	Energy Saving	Quiteness
Four-leaf 	A	AA	AA

**Color chart**

Dia.	Color / Shape	Light duty		Heavy duty	
		Short grass		Tall grass	
		Low density	High density	Low density	High density
1.3mm		↔			
1.6mm - 1.65mm		↔↔			
2.0mm			↔↔↔		
2.4mm				↔↔↔↔	
2.7mm					↔↔↔↔↔
3.0mm					↔↔↔↔↔↔


**Other Nylon cord (round, natural)**



Size	Part No.
1.65mmx15m	DA00000003
2.4mmx5m	B-01971
3.0mmx4m	B-07375


**Four-Leaf Line**

Low noise and energy saving








Four-leaf shape makes small vortex and realizes low noise and energy saving feature thanks to less air resistance.

The amount of cutting per 1 charge









Noise





Color / Shape	Layer	Dia. (mm)	Length(m)	Part No.
	Single	1.65	15	E-01731
	Single	2	15	E-01769
	Single	2	30	197473-7 E-01775
	Single	2	310	E-01781
	Single	2.4	15	198501-1 E-01797
	Single	2.4	30	198502-9 E-01806
	Single	2.4	225	E-01812
	Single	2.7	15	E-01828
	Single	2.7	30	E-01834
	Single	2.7	180	E-01840

**Protection guard**

Shape	Type	Model No.	Description	Part No.
<b>Protector</b>				
	Universal	DUR369A , DUR369L, UR101C, UR201C	With protector extension	191B54-1
<b>Extension for Trimmer head</b>				
	Universal	EBH252L/U, EBH253L/U, EM2650LH/UH, EM2651LH/UH, EM2511LH, EM2653LH, EM2654LH, EBH341U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP	Toolless / With cord/line cutter	135398-7
<b>for Cutting blade</b>				
	Exclusive	EBH340R	-	XNR0000302
<b>for Trimmer head</b>				
	Exclusive	UR100D	With cord/line cutter	135950-1
		DUR189	Without cord/line cutter	456651-1
		EM405MP, EM406MP, UR101C, UR201C, UR202C, DUR369A, DUR369L, DUR369N	Narrow type / Without cord/line cutter	457273-0

## Protection guard- Plastic blade set


	Model No.	Plastic Blade Set			Replacement Plastic Blade	
		Arbore Size	Cutting Width	Part No.	Per Pkg.	Part No.
 X5	UR100D	M8x1.25RH	230mm	198848-3	5	198850-6
 x12	DUR369A, DUR369L, DUR369N, UR101C, UR201C, UR202C	M10x1.25LH	305mm	199868-0	12	199870-3

## Spool assembly



Model No.	Part No.
UR3000	DA00000001
DUR181	195858-1
DUR193	191Y39-5

## Shoulder strap assembly

Shape	Model No.	Part No.
Singlet		
	DUN500W DUN501W, DUR181, DUR184L, DUR187L, DUR188L, DUR189, DUR190L, DUR191L, DUR364L, DUR368A, DUR368L, UR100D, UR180D, DUR366L, DUX60L, EBH252L, EBH253L, EBH341L, EM2510LH, EM2511LH, EM2650LH, EM2651LH, EM2653LH, EM2654LH, EM3400L, EN4950H, EN4951SH, EY2650H ,EX2650LH, RBC411U, RBC412U	125516-5
	DUR192L, DUR194, UR002G, UR003G; UR006G, UR007G, DUR193, DUR194, UX18D	127508-0
Comfort		
	DUR369A, EBH252U, EBH253U, EBH341U, EM2650UH, EM2651UH, EM4350UH, RBC411U, RBC412U, RBC413U, RBC414U, UR002G	122906-3



**String trimmer harness for PDC01 & PDC1200**



Item	Part No.
A	191E43-4
B	197243-4

**Attachments for loop handle brushcutter**

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Shape	Model No.	Part No.
<b>Hedge trimmer</b> Blade length: 490mm	EM2650LH, EM2651LH, EM2653LH, EN2654LH	198579-4

<b>Pole saw</b> Bar length: 25cm (10") Saw chain: 91VXL-39links Motor Mount:A218	EM2650LH, EM2651LH.	A-89539
---	------------------------	---------

<b>Coffee harvester</b>	EM2651LH	B-80210
-------------------------	----------	---------

**Attachments for back pack brushcutter**

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Shape	Model No.	Part No.
<b>Coffee harvester</b>	EBH340R, EBH341R	B-80226


<b>Coffee harvester</b>	EBH340R, EBH341R	197163-2
-------------------------	------------------	----------



**Multi-tool attachments**

Shape	Model No.	Part No.
-------	-----------	----------

<b>Brushcutter</b> Cutting width: 420mm Spindle size: M10 x 1.25LH		EX2650LH	EM400MP 195658-9
---	--	----------	---------------------

<b>Grass trimmer</b> Spindle size: M10 x 1.25LH		DUX18, DUX60, EX2650LH, UX01G	EM408MP 191N35-7 EM409MP 191N48-8
---	--	----------------------------------	--

<b>String trimmer</b> Cutting width: 410mm Spindle size: M8 x 1.25RH		EX2650LH	ER400MP 195530-5
---	--	----------	---------------------

<b>Brushcutter</b> Blade size: 230mm Spindle size: M10 x 1.25LH		DUX60, EX2650LH	EM402MP 195952-9
--	--	-----------------	---------------------

<b>Rotary scissors</b> Blade size: 230mm Spindle size: M8 x 1.25 LH		DUX60, EX2650LH	EM407MP 191M60-2
--	--	-----------------	---------------------

**Blower**

Shape	Model No.	Part No.
-------	-----------	----------



	DUX18, DUX60, EX2650LH, UX01G	UB400MP 191F72-3
---	----------------------------------	---------------------

<b>Blower</b>		DUX18, DUX60, EX2650LH, UX01G	UB401MP 191P78-1
---------------	---	----------------------------------	---------------------

<b>Blower</b>		DUX18, DUX60, UX01G	UB402MP 191250-7
---------------	---	------------------------	---------------------

**Pole saw**

\*Except for European, Australian, New Zealand, Chinese &amp; Korean markets.

Shape	Model No.	Part No.
	DUX18, DUX60, EX2650LH, UX01G	EY401MP 199925-4
	DUX18, DUX60, EX2650LH, UX01G	EY403MP 191T41-8

Bar length: 25cm (10") (EY401MP), 30cm (12") (EY403MP)  
Saw chain: 91VXL-39links  
Motor Mount:A218

**Pole hedge trimmer**

Shape	Model No.	Part No.
Angle adjustment 	DUX18, DUX60, EX2650LH, UX01G	EN401MP 196341-1

Straight

	DUX18, DUX60, EX2650LH, UX01G	EN410MP 197742-6
---	----------------------------------	---------------------

Ground trimmer.25LH

	DUX18, DUX60, EX2650LH, UX01G	EN420MP 198061-3
---	----------------------------------	---------------------

**Ground Trimmer**

	DUX18, DUX60, UX01G	EN424MP 1912V6-6
---	------------------------	---------------------

**Cultivator**


Cultivating width: 160mm

	DUX18, DUX60, EX2650LH, UX01G	KR400MP 195712-9
---	----------------------------------	---------------------

**Cultivator**

Cultivating width: 220mm

\* Rotor LR set:  
P/N:199204-0

	DUX18, DUX60, EX2650LH, UX01G	KR401MP 195716-1
---	----------------------------------	---------------------

Shape	Model No.	Part No.
<b>Power brush</b> * Brush wheel (1pc) P/N: XNR0000548 	DUX18, DUX60, EX2650LH, UX01G	BR400MP 199323-2

**Power sweep**\* Sweeper wheel (1pc):  
P/N: XNR0000549

	DUX18, DUX60, EX2650LH, UX01G	SW400MP 199344-4
--	----------------------------------	---------------------

**Coffee harvester**

	DUX18, DUX60, EX2650LH, UX01G	EJ400MP 195726-8 / 197163-2
--	----------------------------------	--------------------------------

**Edger attachment**

	DUX18, DUX60, EX2650LH, UX01G	EE400MP 196750-4
--	----------------------------------	---------------------

**Pump attachment**

	DUX18, DUX60, UX01G	PF400MP A-75384
--	------------------------	--------------------


**Shaft extension attachment**

S For Pole saw, Pole hedge trimmer and Coffee harvester

	DUX18, DUX60, EX2650LH, UX01G	LE400MP 191E23-0
--	----------------------------------	---------------------



Saw Chain and Guide Bar

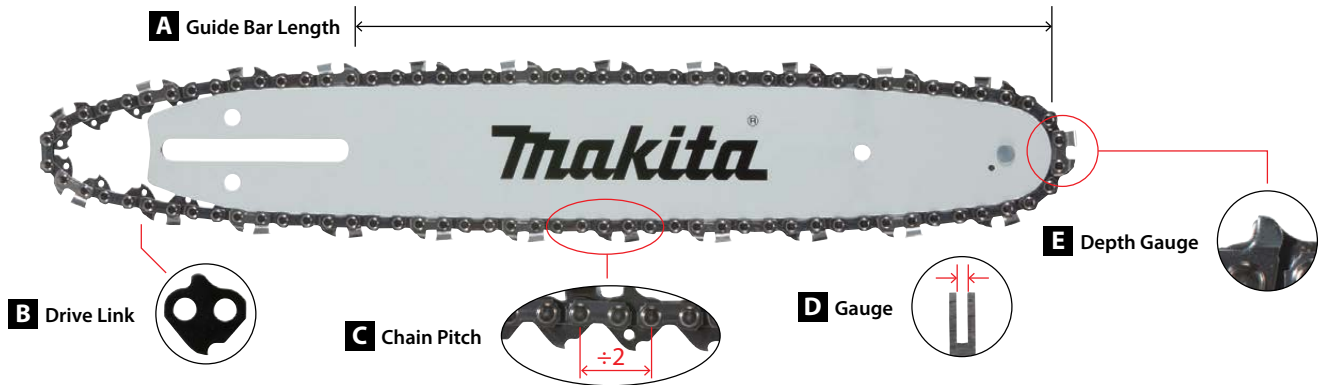


**A Guide Bar Length**

Guide bar's length is represented by cutting length, which is different from its whole length.



**B Drive Link**

The length of saw chain is determined by counting the number of drive links in the saw chain.




**C Chain Pitch**

Chain pitch is the size of the chain and it is defined by the distance between any three consecutive rivets divided by two. Pitch is important because the drive sprocket must be the same pitch as the chain.



**D Gauge**

Chain Gauge is thickness of drive link which will fit into the guide bar groove. Chain gauge must be the same as guide bar gauge.



**E Depth Gauge**

Depth gauge determines how deep the cutting teeth gets into the wood. Cutting depth can be checked by the gap between top of cutter and depth gauge.



General Saw Chain Character

D Gauge	Cutting speed			
	Fast			Slow
C Chain Pitch	.043" (1.1mm)	.050" (1.3mm)	.058" (1.5mm)	.063" (1.6mm)
Surface condition	1/4"	25AP		
	.325"LP	80TXL		
	3/8"LP	90PX	91PX 91VXL	
	.325"	20BPX 95VPX	21BPX 21LPX	22LPX
	3/8"		72V	73DPX 73LGX 73LPX
	.404"			27X

Guide Bar Type

**Sprocket Nose Bars**

Sprocket nose bars have a rotating sprocket mounted at the tip of the bar. As the chain moves along the bar, the sprocket teeth carry the chain around the tip smoothly with less friction.



**High durability sprocket nose bar**

Longer nose life thanks to larger nose sprocket than normal sprocket bars. Multiple rivets can be found on bar surface.



**Solid Carving Bars**

Carving bars are made of high-quality steel and high wear resistant stellite has been welded onto the tip. Bar tip is designed to have small radius for precision cutting. The carving bars are made for especially pruning and carving.



Guide Bar Maintenance

**Chain Tension**

Check the chain tension before use. The saw chain may become loose after many hours of use.



**File Bar Edge**

File bar edge with a flat file to keep it 90° once a week.




**Clean Guide Bar**

Clean out chips and sawdust every time when you sharpen or replace saw chain.



**Bar Nose Grease**

Lubricate a whole sprocket regularly so that the saw chain can rotate with less friction.



## Chain Saws

## Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket



## Guide Bar

Sprocket nose bar



Carving bar

Saw Chain



Bar Cover



Cutter type SC: Semi chisel FC: Full chisel

For Models	Guide Bar		Saw Chain					Bar Cover Part No.	File diameter, 1st half of top plate	File diameter 2nd half of top plate	Type	
	Bar length	Part No.	No. of drive links	gauge	pitch	Cutter type	Saw Chain Part No.					
<b>Electric Chain Saws</b>												
BUC250	25cm/10"	1911A1-3	60	1.3mm/0.050"	1/4"	25AP	SC	194098-8/ 191G96-5	-	4.0mm	4.0mm	Carving bar
	25cm/10"	168408-5/ 191G22-4	40	1.3mm/0.050"	3/8"	91VG	SC	191H08-4	-	4.0mm	4.0mm	Sprocket
UC120D, BUC121, BUC122	16cm/6-1/4"	158476-6/ 191G59-1	42	1.3mm/0.050"	1/4"	25AP	SC	791284-8	-	4.0mm	4.0mm	-
UC3510A, UC3520A	35cm/14"	165246-6/ 191G16-9	52	1.1mm 0.043"	3/8"	90SG	SC	531 291 652	-	4.5mm	4.0mm	Sprocket
UC4010A, UC4020A	40cm/16"	191G17-7	56	1.1mm 0.043"	3/8"	90SG	SC	196742-3/ 191H03-4	419242-9	4.5mm	4.0mm	Sprocket
UC3020A	30cm/12"	191G23-2	46	1.3mm/0.050"	3/8"	91VG	SC	531 492 646	-	4.0mm	4.0mm	-
UC3520A	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	-	4.0mm	4.0mm	-
UC4020A	40cm/16"	191G25-8	56	1.3mm/0.050"	3/8"	91VG	SC	191H12-3	419242-9	4.0mm	4.0mm	-
		D412 040 661										
UC3500, UC3530A	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	-	4.0mm	4.0mm	-
UC4030A	40cm/16"	191G25-8	56	1.3mm/0.050"	3/8"	91VG	SC	191H12-3	419242-9	4.0mm	4.0mm	-
5012B	30cm/12"	164533-0	45	1.3mm/0.050"	3/8"	91VG	SC	196519-6	-	4.0mm	4.0mm	-
5016B	40cm/16"	341650-5	56	1.3mm/0.050"	3/8"	91VG	SC	196521-9	-	4.0mm	4.0mm	-
DUC302	30cm/12"	165245-8/ 191G15-1	46	1.1mm/0.043"	3/8"	90SG	SC	196740-7	-	4.5mm	4.0mm	Sprocket
5014B	35cm/14"	345159-9	52	1.1mm/0.043"	3/8"	90SG	SC	191H02-6	-	-	-	Sprocket
<b>Petrol Chain Saws</b>												
DCS231T	25cm/10"	168408-5/ 191G22-4	40	1.3mm/0.050"	3/8"	91VG	SC	191H08-4	-	4.0mm	4.0mm	Sprocket
DCS330TH	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	952 100 633	4.0mm	4.0mm	-
DCS3400TH, DCS3410TH	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	-	4.0mm	4.0mm	-
DCS3400, DCS3410	35cm/14"	D412 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	-	4.0mm	4.0mm	-
EA3201S-35, DCS33, DCS34, DCS330, DCS330S, DCS340, DCS341, DCS344, DCS390, DCS400, DCS401	30cm/12"	442 030 661	46	1.3mm/0.050"	3/8"	91VG	SC	531 492 646	-	4.0mm	4.0mm	-
	35cm/14"	D412 035 661	52					191H11-5	-			
	40cm/16"	D412 040 661	56					191H12-3	-			
DCS3500, DCS3501	35cm/14"	442 035 661	52	1.3mm/0.050"	3/8"	91VG	SC	191H11-5	952 010 630	4.0mm	4.0mm	-
	40cm/16"	442 040 661	56					191H12-3	-			
DCS43, DCS52, DCS430, DCS431, DCS520	38cm/15"	443 038 651	56	1.3mm/0.050"	3/8"	91VG	SC	523 093 656	952 020 650	5.5mm	4.8mm	-
	45cm/18"	445 045 651	64					523 093 664	952 020 650			
DCS4300i, DCS5200, DCS5200i, DCS6000i, DCS6800i	38cm/15"	443 038 651	56	1.5mm/0.058"	3/8"	73DP	SC	523 093 656	-	5.5mm	4.8mm	-
	45cm/18"	445 045 651	64					523 093 664	-			
	38cm/15"	443 038 651	56					523 093 656	-			
	45cm/18"	191G51-7	64					528 099 664	-			
	60cm/24"	445 060 451 445 060 455	84					528 099 684	952 020 660			
EA6100, EA7900, DCS6400, DCS6401, DCS6400H, DCS7300, DCS7300H, DCS7301, DCS7900, DCS7900H, DCS7901, PS7300, PS7900	45cm/18"	445 045 655	72	1.3mm/0.050"	0.325"	95VP	-	512 484 772	952 020 650	5.5mm	4.8mm	-
	45cm/18"	445 045 655	68					528 099 668	952 020 650			
	50cm/20"	445 050 655	72					528 099 672	952 020 650			
	60cm/24"	445 060 455	84					528 099 684	952 020 660			
	70cm/28"	445 070 455	94					528 099 694	-			
	60cm/24"	445 060 451	80					528 099 680	-			
	60cm/24"	445 060 451 445 060 455	84					528 099 684	952 020 660			
	70cm/28"	445 070 455	94					528 099 694	-			
DCS9000, DCS9010, PS9010	76cm/30"	443 076 422	92	1.5mm/0.058"	3/8"	73LP	FC	528 099 696	-	5.5mm	4.8mm	-
								522 103 792	-			
EA4301F	45cm/18"	D412 045 661	62	1.3mm/0.050"	3/8"	95VP	SC	531 492 662	-	-	-	Sprocket
		445 045 655	72					512 484 772	-			-
DCS430, DCS460, DCS520, 109	45cm/18"	445 045 451	64	1.5mm/0.058"	3/8"	73LP	FC	528 099 664	-	-	-	Solid
		191G51-7						73DP	SC			523 093 664
DCS6000i, DCS6400, DCS6401, PS6400	50cm/20"	445 050 455	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	-
DCS520, DCS6000i, 111	53cm/21"	445 053 451	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	Solid
		443 053 651						-	Sprocket			
EA3201S	40cm/16"	191G17-7	56	1.1mm/0.043"	3/8"	90SG	SC	531 291 656	419242-9	4.5mm	4.0mm	-

Model No.	Guide Bar				Saw Chain						Bar Cover		Drive sprocket	
	Bar length	Motor Mount	Type	Part No.	No. of drive links	gauge	pitch	Type OREGON / DOLMAR	Cutter type	Part No.	Part No.	Type	Part No.	

**Cordless Chain Saws**


UC120D,	16cm/6-1/4"	-	without Sprocket	158476-6/191G59-1	42	1.3mm/ .050"	1/4"	25AP / 466	MC	791284-8	-	Sprocket	221504-1
DUC121, DUC122	16cm/6-1/4"	-	without Sprocket	158476-6/191G59-1	42	1.3mm/ .050"	1/4"	25AP / 466	MC	791284-8	-	Sprocket	221527-9
DUC204 DUC254 DUC254C	25cm/10"	-	Solid carving bar	1911A1-3	60	1.3mm/ .050"	1/4"	25AP / 466	MC	194098-8	-	-	-
		A041	Sprocket nose bar	191G14-3	40	1.1mm/ .043"	3/8" LP	90PX / 291	CC	191H00-0	-	-	1911W5-9
		A041		168408-5/191G22-4	40	1.3mm/ .050"	3/8" LP	91PX / 492	CC	191H04-8	-	-	-
BUC250, UC250D, BUC300, UC300D, DUC252, DUC302	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/ .043"	3/8" LP	90PX / 291	CC	191H01-8	-	-	-
	25cm/10"	-	-	1911A1-3	60	1.3mm/ .050"	1/4"	25AP / 466	MC	194098-8/191G96-5	-	-	-
	25cm/10"	A041	Sprocket nose bar	168408-5/191G22-4	40	1.3mm/ .050"	3/8" LP	91PX / 492	CC	191H04-8	-	Sprocket	221526-1
	30cm/12"	A041	Sprocket nose bar (Micro-Lite)	165245-8	46	1.1mm/ .043"	3/8" LP	90PX / 291	CC	196740-7	-	-	-
	25cm/10"	-	-	A-68600	60	1.1mm/ .043"	1/4"	-	-	191D60-8	-	Sprocket	221497-2
UC002G UC003G UC004G UC006G UC007G UC010G- UC020G	30cm/12"	A041	Sprocket nose bar	*191T86-6	51	1.1mm/ .043"	0.325	80TXL	MC	*191T90-5	-	-	-
	35cm/14"	A041		*191T87-4	59					*191T91-3	-	Sprocket	191V91-5
	40cm/16"	A041		*191T88-2	64					*191T92-1	-	-	-
DUC303, DUC353, DUC400	30cm/12"	A041	Sprocket nose bar (Micro-Lite)	165245-8	46	1.1mm/ .043"	3/8" LP	90PX / 291	CC	196740-7	-	Sprocket	199063-2 / 1911W5-9
	35cm/14"	A041		165246-6	52					531 291 652	-		
	40cm/16"	A041		191G17-7	56					196742-3/191H03-4	419242-9		
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	191H10-7	-	-	-				
	35cm/14"	A041	Sprocket nose bar	191G24-0	52	1.3mm/ .050"	3/8" LP	91PX / 492	CC	191H11-5	-	-	-
40cm/16"	A041	-	191G25-8	56	-	-	-	-	191H12-3	419242-9	-	-	

**Electric Chain Saws**

UC3041A, UC3541A, UC4041A	30cm/12"	A041	Sprocket nose bar (Micro-Lite)	165245-8	46	1.1mm/ .043"	3/8"	90PX / 291	CC	196740-7	-	Sprocket	-
	35cm/14"	A041		165246-6	52					191H02-6	-		
	40cm/16"	A041		191G17-7	56					191H03-4	419242-9		
	30cm/12"	A041	Sprocket nose bar	-	46	-	-	-	-	-	-	-	-
	35cm/14"	A041		442 035 661	52	1.3mm/ .050"	3/8"	91PX / 492	CC	-	-	-	-
	40cm/16"	A041		191G25-8	56	-	-	-	-	419242-9	-	-	-
UC3050A, UC3550A, UC4050A, UC4550A, UC3051A, UC3551A,	30cm/12"	A041	Sprocket nose bar	-	46	1.3mm/ .050"	3/8"	91PX / 492	CC	-	-	Sprocket	221521-1
	35cm/14"	A041		191G24-0	52					191H11-5	-		
	40cm/16"	A041		191G25-8	56					191H12-3	419242-9		
UC4051A, UC4551A	45cm/18"	A041	-	-	-	-	-	-	-	419242-9	-	-	-

**Solid Carving Bar**

Part No. 1911A1-3



Saw Chain: 25AP-60 links  
Part No. 191G96-5



Drive sprocket: 1/4" 9T  
Model No.



DUC204, DUC254, DUC254C, DUC303, DUC353, DUC400, DUC305, DUC355, DUC405  
DUC256, DUC306, DUC356, DUC406, DUC256C: 198259-2  
DUC252, DUC302, DUC352, DUC252C: 221528-7  
UC002G, UC003G, UC004G, UC006G, UC007G: 191V92-3



## Bar nut



\* Pole saw attachment (196315-2)

Model No.	Thread Size	Wrench Size	Part No.
EA4300F, EA5001P, EA5000P, EA6100P, EA6101P, EA7300P, EA7301P, EA7900P, EA7901P	Single	2	252145-2 923208004


## Round File, File holder

For Model:  
Chain saw  
\* with handle




Saw Chain Type	Size	Round File		File and File Handle and File Holder
		Part No.	Q'ty	Part No.
25F, 25AP, 91P, 91PX, 91PXL, 91VXL, M91VXL, 466, 492, 196	4mm	*744003-1	1	-
		953003090	1	953030010
		D-67365	12	D-70948
90PX, 90SG, 291	4.5mm	953003100	1	195923-6
		-	-	D-70954
		-	-	-
95VPX, 95TXL, 20BPX, 21BPX, 22BPX, 20LPX, 21LPX, 22LPX, 082, 086, 686, 484	4.8mm	953003070	1	-
		-	-	D-70960
		-	-	-
72DPX, 73DPX, 75DPX, 72LPX, 73LPX, 75LPX	5.2mm	D-67424	12	D-70976
		-	-	-
72V, 73V, 75V, 72APX, 72DPX, 73DPX, 75DPX, 72EXL, 73EXL, 75EXL, 72EXJ, 73EXJ, 75EXJ, 72LGX, 73LGX, 75LGX, 72JGX, 73JGX, 75JGX, 72JPX, 73JPX, 75JPX, 72LPX, 73LPX, 75LPX, 72RD, 73RD, 75RD, 496, 093, 099	5.5mm	953003040	1	-
		-	-	D-70982
		-	-	-

## Pruning extension set

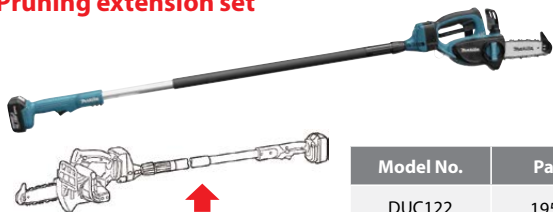

Model No.	Part No.
DUC122	195595-7

## Holster For DUC101 &amp; UC100D



Model No.	Part No.
DUC101, UC100D	1911R0-4

## Flat File, Depth gauge



Flat file		Depth Gauge		Flat File and File Handle and Depth Gauge
Part No.	Q'ty	Part No.	Part No.	Part No.
953003060	1	953003060	-	-
-	-	-	-	D-70998



## File set for in Roll Up Pouch



For all saw chain

Description	Part No.
φ4.0mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72154
φ4.8mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72176
φ5.2mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72182
φ5.5mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72198

## Chain oil

Description	Size	Part No.
Chain Oil		
 <p>With Makita chain oil, chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. (Not available in Austria)</p>	100ml	199897-3
BIOTOP Chain oil		
 <p>With BIOTOP, chain oiling is safe for environment. BIOTOP is purely vegetablebased and readily biodegradable. It meets the strict requirements of the RAL UZ48 environment mark for environmental compatibility, lubrication, and aging resistance.</p>	1L	980008610 1910U0-9

**Hook holder for extension cord**




Model No.	Description	Part No.
B	Cord holder complete set	194677-2
C	Hook complete	158024-1

**Shear blade & Blade cover for Grass Shear**



Model No.	Cutting Width	Blade Assembly	Blade cover	Grass Receiver
DUM111, DUM110	110mm	191N23-4	413885-9	454880-0
DUM168, DUM604, UM600D, UM603D	160mm	195267-4	452055-5	457426-1

**Conversion from Hedge Trimmer to Grass Shear**

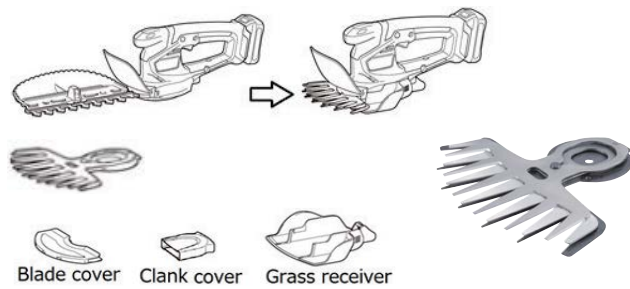

Model No.	Cutting Width	Blade assembly
UH201D	160mm	195267-4

**Grass Receiver**




\*with grass Shear blade

Model No.	Part No.
DUM604, UM600D, UM603D, *UH201D	457426-1

**Blade type**

**A: Curving blade**

Optimum blade shape for smooth cutting

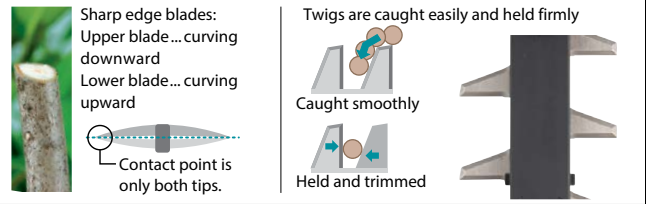

**B: High grade blade**

Upper/ Lower blade teeth with 3



**C: Stain-free blade**

Non-electrolyzed nickel plating



Model No.	Blade Assembly		Blade Cover
	Blade Type	Part No.	Part No.

Cordless Hedge Trimmer

\*for China, Hong Kong, Korea, Malaysia, Philippines, Singapore, Taiwan & Vietnam.

\*\*for Canada & Mexico

UH201D	C	EU:198408-1	458342-0
DUH551	C	196687-5	450489-6
DUH651	C	196688-3	450490-1
DUH506	C	1910H8-2	-
DUH606	C	1910H9-0	-
DUH507	C	1911J1-6	-
DUH521, DUH523U, UH520D, UH522D	C	195769-0	-
DUH501	A	-	458413-3
DUH601	A	199099-1	458414-1 *459121-9
DUH751	A	199100-2	458415-9
DUH604S	B	191D38-1	-
DUH754S	B	191D39-9	-
DUH502	B	199598-3	459120-1
DUH502	B	**199236-7	**459120-1
UH004G	A	191R53-9	-
UH005G	A	191R54-7	-
UH006G	A	191R55-5	-
UH007G	A	191R56-3	-
UH008G	B	191R57-1	-
UH009G	B	191R58-9	-
UH014G	B	191Y05-2	-

Model No.	Blade Assembly		Blade Cover
	Blade Type	Part No.	Part No.

Pole Hedge Trimmer (Cordless, Petrol, Multi-tool attachments)

\*with Blade guard

\*\*without Blade guard

DUN461W, UN460WD	A	191P00-8	-
DUN500W	A	191C14-9	458413-3
DUN600L	A	191C13-1	-
EN420MP	B	198195-2	-
EN401MP, EN410MP, EN4950H, EN4951SH	B	197763-8 EU:197768-8	-
EN5950S	B	**126281-9	-

AC Hedge Trimmer

UH5580	C	194671-4	-
UH6580	C	194673-0	-
UH6570	C	194666-7	-
UH7580	C	194675-6	-

Petrol Hedge Trimmer

\*for blade without end cover

\*\*for blade with end cover

EH5000W	B	123709-8	-
EH6000W	B	196797-8	-
EH7500W	B	125857-9	-
EH6000S	B	-	-
EH7500S	B	125773-5	-

### Chip receiver assembly set

Keeps branch or leaf debris from scattering around.

• Attachable to either side of the blade



Model No.	Description	Part No.
DUH202, *DUM111, *DUM604, UH201D, *UM110D, *UM600D, *UM603D	One-touch installation removal	198401-5
DUH483, DUH523, UH4261, UH4861, UH5261	With binding head screw M5X12 x 5pcs	195050-9
DUH501, DUH502, DUH601, DUH602, DUH751, DUH752	One-touch installation/removal	199151-5
DUH502, DUH602, DUH752	One-touch installation/removal	199152-3**
DUH604S	-	191D33-1
DUH754S	-	191D34-9
UH004G, UH006G, UH008G	-	191R51-3
UH005G, UH007G, UH009G	-	191R52-1

### Toothed edge


designed like saw teeth can catch and prevent leaf or twig debris from falling over the edge of chip receiver.



Anti-slide ribs on the bottom plate prevents leaf or twig debris from sliding and slipping out of chip receiver.

Model No.	Description	Content	Part No.
EH7500S, EN7350S	without blade guard	With binding head screw M5X12 x5pcs	196777-4
EH7500S, EN7350S	with blade guard	With binding head screw M5 x 12 x 5pcs.	195321-4

### Conversion from Grass Shear to Hedge Trimmer

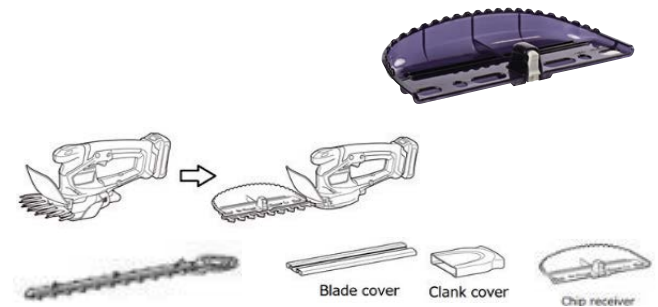

\*With clank cover

Model No.	Blade Assembly	Blade Cover	Chip Receiver
	Part No.	Part No.	Part No.
DUM604, UM600D, UM603D	198408-1	*195274-7	198401-5
DUM110, DUM111	191N24-2	458342-0 *195274-7	198401-5

### Blade guard



Model No.	Part No.
Cordless Hedge Trimmer	
DUH501, DUH502, DUH601, DUH602, DUH751, DUH752	458408-6

### Long attachment handle (Extension handle kit)

Photo:198486-1



\*with grass shear blade

Model No.	Part No.
DUM604, *DUH202, UM110D, DUM111, UM600D, UM603D, *UH201D	EU:198486-1



**Pruning Shear blade**

Shear blade (U)



Do not re-use Stop Ring E-4 when reassembling.



Stop Ring E-4

Shear blade (L)

Do not re-use Stop Ring E-4 when reassembling.  
Stop Ring E-4

\*With Stop Ring E-4 (P/N:961011-9)

\*\*Hex socket button head screw M3x6 P/N:266183-8

& Shoulder bolt M8

P/N:251573-8 are also necessary.

Model No.	Type	*ShearBlade (U)	Shear Blade (L)
		Part No.	Part No.
DUP361 DUP362	Standard	EU: 197588-0*	EU: 197367-6
	For hard branch	-	199169-6
	For thin branch	199314-3**	-

**Branch catcher set**


\*with Shear blades for thin branch

Branch catcher set



Model No.	Part No.
*DUP361, *DUP362	199311-9

**Diamond file for shear blade**



Model No.	Part No.
DUP361, DUP362	794530-8

**Wheelbarrow attachment**

**Dump unit set**

DCU603 & DCU604



**Carrier set**

DCU180



DCU604



**Bucket set**


DCU180



DCU603



DCU605

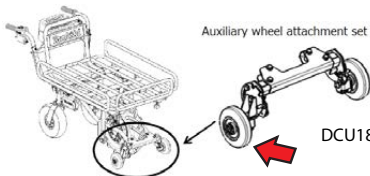

Auxiliary wheel attachment set

DCU180

Model No.	Type	Part No.
DCU180	Carrier set (Pipe deck)	199116-7
	Bucket set	198494-2
	Auxiliary wheel attachment set	191A01-6

**Wheelbarrow attachment**

Model No.	Type	Part No.
DCU603	Dump Bucket 200 Set	191B69-8
DCU604	Carrier Set	191B67-2
DCU605	Flat Bucket Set	1911B3-6
DCU603, DCU604	Dump Unit Set	191B63-0

**Tire for Wheelbarrow**



Model No.	Type	Part No.
DCU603, DCU604, DCU605	Tire 330 (Single) Set	1911K4-7
	Gray Tire 330 (Single) Set	1911K5-5
	Gray Tire 210 (Single) Set	1911K6-3

**Rotary lawn mower blade**













Model No.	Size (mm)	Part No.
<b>Cordless Lawn Mower</b>		
DLM382	380	191D41-2
DLM432	430	191D43-8
DLM460, DLM461, DLM463, DLM464	460	199367-2
DLM462, DLM465	460	191D51-9
DLM530, DLM531, DLM532, DLM536, DLM537, LM001C	530	191D52-7
<b>Electric Lawn Mower</b>		
ELM3320	330	YA00000745
ELM3720	370	YA00000746
ELM4121	410	YA00000738
ELM4620	460	YA00000741
ELM4621	460	YA00000741
<b>Petrol Lawn Mower</b>		
PLM4120N	410	671001433
PLM4620N2, PLM4621N2, PLM4622N2, PLM4626N, PLM4627N, PLM4628N, PLM4630N2, PLM4631N2, PLM4632N	460	DA00001274

**Rotary lawn mower swing back blade**




Model No.	Swing Back Blade Set		Replacement Blade Set	
	Size (mm)	Part No.	Size (mm)	Part No.
DLM462, DLM465	460	191D49-6	4	191D47-0
DLM530, DLM531, DLM532, DLM533, DLM535, DLM536, DLM537, LM001C	530	191D50-1	4	191D48-8

## Sprayer accessories for EF1550RH &amp; EVH2000

Shape	Model No.	Features/ Recommended use	Part No.	
Wide angle herbicide nozzle 	EF1550RH EVH2000	for spraying herbicides; also ideal for watering plants or spraying soil conditioner	6908031000	
Herbicide nozzle 		Hard to become mist preventing diffusion of medicine.	6958011000	
Y-shaped double nozzle 		for general pesticide applications using insecticides, fungicides, etc.	6958025000	
Long two head nozzle 		Wide spraying with wide angle outlet.	6949001000	
U-shaped double nozzle 		Wide spraying with wide angle outlet.	6958018000	
Triple concentric nozzle 		Spraying in the form of circular.	6909500100	
Quadruple concentric nozzle 		Spraying in the form of circular.	6919500000	
Compact nozzle 		Convenient for spraying in the green house by compact nozzle.	6939025000	
Jet nozzle 2 		EVH2000	Diffusion or straight is selectable with one tach	6939024000
Super jet nozzle 			Diffusion or straight is selectable.	6939028000

## Power washer accessories for DHW080, HW1200, &amp; HW1300

Shape	Model No.	Part No.
Trigger gun set 	DHW080 HW1200 HW1300	197842-2
Variable nozzle set 	DHW080 HW1200 HW1300	197822-8
Variospray lance set 	DHW080 HW1200 HW1300	197876-5
Cyclone jet nozzle set 	DHW080 HW1200 HW1300	197824-4
Cyclone guard set 	DHW080 HW1200 HW1300	197864-2
Under body spray lance set 	DHW080 HW1200* HW1300* (*for 110-127V)	197859-5
	HW1200** HW1300** (**for 220V-240V)	198909-9
Extension pipe set (0.9m / 1.3m / 1.7m) 	DHW080 HW1200 HW1300	197870-7

Shape	Model No.	Part No.
Trigger gun set 	DHW080 HW1200 HW1300	197842-2
Rotating brush set 	DHW080 HW1200 HW1300	197831-7
Wash brush set 	DHW080 HW1200 HW1300	197828-6
Foam nozzle set 	DHW080 HW1200 HW1300	197886-2
Pipe cleaning hose 	DHW080 HW1200 HW1300	10m 197837-5
		15m 197840-6
High pressure extension hose 	DHW080 HW1200 HW1300	5m 197845-6
		8m 197847-2
		10m 197850-3
Twist prevention joint set 	DHW080 HW1200 HW1300	197867-6
Self-suction hose set 	DHW080 HW1200 HW1300	197873-1
Accessory joint set 	DHW080 HW1200 HW1300	197853-7
Absorption connector set 	DHW080 HW1200 HW1300	197881-2
One touch joint set 	DHW080 HW1200 HW1300	197883-8
Cleaner pin set 	DHW080 HW1200 HW1300	197879-9
Shoulder belt 	DHW080	162523-7



**Spark plug**



Model No.	Wrench Size (mm)	Part No.
NGK CMR4A	16	168534-0
NGK CMR6A	16	168401-9
NGK CMR6H	16	168652-4
NGK CMR7A-5	16	168599-2
NGK BPMR7A	19	168648-5
NGK BPM7A	19	168588-7
NGK BPMR8Y	19	649500-1
NGK BMR7A	19	168662-1

**High-performance 2-stroke engine oil 50:1**



Model No.	Part No.
100ml	980008606
1L	980008607

**Fuel mixture**



Model No.	Part No.
1L	456236-3

**Grease vessel set**



Description	Size	Part No.
For Pole hedge trimmer and Multi-tool attachments (Cultivator, Power brush and Power sweep) (GREASE NO.0)	80ml	197439-7
For string trimmer, Brushcutter and Hedge trimmer (GREASE NO.2)	80ml	199450-5





**Makita**<sup>®</sup>  
**GENERAL EQUIPMENT**

**CF002GZ 330mm (13") Cordless Fan**

Increased max air velocity 240 m/min

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Continuous Use (min.) w/o oscillation	w/ BL4040: Low / Mid / High: 1,020 / 640 / 320
Continuous Use (min.) w/ oscillation	w/ BL4040: Low / Mid / High: 970 / 610 / 305
Max Air Velocity	High / Mid / Low: 240 / 170 / 120 m/min
Air Flow	High / Mid / Low: 21 / 15 / 10 m³/min
Noise level	52 dB(A)
Fan Diameter	330 mm (13")
Dimensions (L x W x H)	w/ BL4040: 277 x 439 x 602 mm
Net weight	3.8 - 5.1 kg (8.4 - 11.2 lbs.)

40Vmax



AC Adaptor, Z: Battery and Charger are sold separately

**CF001GZ 235 mm (9-1/4") Cordless Fan**

40Vmax XGT Automatic Swing Fan

Li-ion Ah 5.0 4.0 2.5 2.0



Continuous Use (min.) w/o oscillation	w/ BL4040 Low / Mid / High: 1,160 / 880 / 660 w/ BL4025 Low / Mid / High: 730 / 550 / 410
Continuous Use (min.) w/ oscillation	w/ BL4040 Low / Mid / High: 1,055 / 800 / 600 w/ BL4025 Low / Mid / High: 665 / 500 / 370
Max Air Velocity	High / Med / Low: 190 / 150 / 120 m/min
Air Flow	High / Med / Low: 8.2 / 6.5 / 5.2 m³/min
Dimensions (L x W x H)	143x333x463 mm (5-5/8"x13"x18-1/4")
Net weight	2.0 - 3.0 kg (4.4 - 6.6 lbs.)

40Vmax



AC Adaptor, Z: Battery and Charger are sold separately



**DCF301Z 330mm (13") Cordless Fan**

Increased max air velocity 240 m/min

Li-ion Ah 6.0 5.0 3.0 1.5



Continuous Use (min.) w/o oscillation	w/ BL1860B: Low / Mid / High: 850 / 430 / 215
Continuous Use (min.) w/ oscillation	w/ BL1860B: Low / Mid / High: 815 / 415 / 210
Max Air Velocity	High / Mid / Low: 240 / 170 / 120 m/min
Air Flow	High / Mid / Low: 21 / 15 / 10 m³/min
Noise level	52 dB(A)
Fan Diameter	330 mm (13")
Dimensions (L x W x H)	w/ BL1860B: 269 x 439 x 602 mm
Net weight	3.8 - 4.5 kg (8.4 - 9.9 lbs.)

18V

14.4V



AC Adaptor, Z: Battery and Charger are sold separately

**DCF203Z 235 mm (9-1/4") Cordless Fan**

Automatic Swing Fan

Li-ion Ah 6.0 5.0 3.0 1.5



Max Continuous Use (min.)	w/ BL1860B: Low / Medium / High: 1,010 / 650 / 410
Max Air Velocity	High / Med / Low: 190 / 150 / 120 m/min
Air Flow	High / Med / Low: 8.2 / 6.5 / 5.2 m³/min
Dimensions (L x W x H)	140x333x447 mm (5-1/2"x13"x16-1/2")
Net weight	1.9 - 2.6 kg (4.2 - 5.6 lbs.)

18V

14.4V



Z: Battery and Charger are sold separately

**DCF102ZX1 180 mm (7-1/8") Cordless Fan**

Automatic Swing Fan

Li-ion Ah 6.0 5.0 3.0 1.5



Max Continuous Use (min.)	w/ BL1860B: Low / Medium / High: 1270 / 705 / 575
Dimensions (L x W x H)	185x272x284 mm (7-1/4"x10-3/10"x11-1/8")
Net weight	1.3 - 2.0 kg (2.9 - 4.4 lbs.)

18V



Z: Battery and Charger are sold separately

**CF101DZX1 180mm (7-1/8") Cordless Fan**

Automatic Swing Fan

Li-ion Ah 4.0 2.0 1.5



Max Continuous Use (min.)	w/ BL1041B: Low / Medium / High: 630 / 380 / 275
Dimensions (L x W x H)	185x260x284 mm (7-1/4"x10-1/4"x11-1/8")
Net weight	1.3 - 1.7 kg (2.8 - 3.8 lbs.)

12Vmax



DZ: Battery and Charger are sold separately

**DCM501Z Cordless Coffee Maker**

Either CXT battery or LXT battery is used

Li-ion Ah 6.0 5.0 3.0 1.5



Water Tank Capacity	240 mL
Compatible Cafe Pod Type	60 mm
Dimensions (L x W x H)	w/ BL1041B: 243x185x218 mm (9-9/16"x7-5/16"x8-9/16") w/ BL1830B / BL1850B / BL1860B: 243x187x218 mm (9-9/16"x7-3/8"x8-9/16")
Net weight	1.9 - 2.2 kg (4.1 - 4.8 lbs.)

18V

12Vmax



Mug, Measuring Spoon, Z: Battery and Charger are sold separately

## CW002GZ Cordless Cooler &amp; Warmer Box

New

Large 50 L capacity

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	50L (13.2 gal)
Cooling Capacity	-18/-15/-10/-5/0/5/ 10°C/0/5/15/25/30/40/ /50°F
Warming System	30/35/40/45/50/55/ 60°C (85/95/105/115/ 120/130/140°F)
Run Time	w/BLBL4040, -18/5/ 60°C: 8/19.5/4.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Storage dimensions (L x W x H)	500 x 320 x 320 mm (19-3/4 x 12-5/8 x 12-5/8")
Dimensions (L x W x H)	867 x 465 x 476 mm (34-1/8 x 18-1/4 x 18-3/4")
Net weight	25.6 - 29.0 kg (56.4 - 63.9 lbs.)

40Vmax 18V

XGT LXT



Cigar Socket Cable, Z: Battery and Charger are sold separately

## CW001GZ Cordless Cooler &amp; Warmer Box

Powered by 4 sources: 40Vmax / 18V / 12V/24V DC (cigar socket) / AC

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	20L (5.3 gal)
Cooling System	Compressor type
Cooling Capacity	-18/-15/-10/-5/ 0/5/10°C
Warming System	Heater
Warming Capacity	30/35/40/45/ 50/55/60°C
Run Time	w/BL4050FX2, -18°C/5°C/60°C: 10h/28h/8.5h
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Dimensions (L x W x H)	663x341x372 mm (26-1/8x13-3/8x14-5/8")
Net weight	13.5 - 16.1 kg (29.8 - 35.5 lbs.)

40Vmax 18V

XGT LXT



Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

## CW003GZ Cordless Cooler &amp; Warmer Box

New

Compact design, 7 L capacity

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	7L (1.8 gal)
Cooling System	Compressor type
Cooling Capacity	-18/-15/-10/-5/0/ 5/10°C
Warming System	Heater
Warming Capacity	30/35/40/45/ 50/55/60°C
Run Time	w/BLBL4040, -18/5/60°C: 5.5/13.5/5.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Dimensions (L x W x H)	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")
Net weight	7.9 - 9.4 kg (17.4 - 20.7 lbs.)

40Vmax 18V

XGT LXT



Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

## DKT360Z Cordless Kettle

Powered by two 18V LXT batteries in series

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Boiling time	8 min
Water Tank Capacity	800 mL
Dimensions (L x W x H)	233 x 263 x 307 mm (9-1/8 x 10-3/8 x 12-1/8")
Net weight	2.7 - 3.4 kg (6.0 - 7.5 lbs.)

18V x2

LXT

Z: Battery and Charger are sold separately

**Keep cold, Keep hot**

CW002GZ 50L (13.2gal)

CW001GZ 20L (5.3gal)

CW003GZ 7L (1.8gal)

**-18°C ~ 60°C [0°F ~ 140°F]**

IPX4-rated water resistance




USB output port



Bottle opener



Indication lamps



## CW003GZ Cordless Cooler &amp; Warmer Box

New

Compact design, 7 L capacity

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	7L (1.8 gal)
Cooling System	Compressor type
Cooling Capacity	-18/-15/-10/-5/0/ 5/10°C
Warming System	Heater
Warming Capacity	30/35/40/45/ 50/55/60°C
Run Time	w/BLBL4040, -18/5/60°C: 5.5/13.5/5.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Dimensions (L x W x H)	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")
Net weight	7.9 - 9.4 kg (17.4 - 20.7 lbs.)

40Vmax 18V

XGT LXT



Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

## KT001GZ Cordless Kettle

Powered by two or one 40Vmax XGT Li-Ion battery or PDC1200 Portable power pack

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Boiling time	8 min
Water Tank Capacity	800 mL
Dimensions (L x W x H)	233 x 322 x 307 mm (9-1/8 x 12-5/8 x 12-1/8")
Net weight	2.8 - 5.9 kg (6.2 - 13.0 lbs.)

2

40Vmax

XGT

Z: Battery and Charger are sold separately

## DKT360Z Cordless Kettle

Powered by two 18V LXT batteries in series

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Boiling time	8 min
Water Tank Capacity	800 mL
Dimensions (L x W x H)	233 x 263 x 307 mm (9-1/8 x 10-3/8 x 12-1/8")
Net weight	2.7 - 3.4 kg (6.0 - 7.5 lbs.)

18V x2

LXT

Z: Battery and Charger are sold separately



**MR006G Job Site Radio**

12Vmax-40Vmax CXT LXT XGT Li-Ion Cordless Bluetooth Job Site Radio

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Frequency Band	FM/AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Speaker Size	Sides: Dia. 63.5 mm x2 Bottom: Dia. 101.6 mm
Max Output	40Vmax: 5W x2 + 25W / 18V: 5W x2 + 25W / 14.4V: 3W x2 + 15W / 12Vmax: 2W x2 + 10W
Bluetooth	Version: 5.0 Profile: A2DP / SCMS-T / AVRCP Supported Codec: SBC Max Transmission Range: 10 m (33 ft)
Dimensions (L x W x H)	w/ Handle in Retracted Position: 285 x 172 x 305 mm
Net weight	5.6 - 6.4 kg (12.3 - 14.1 lbs.)

Bluetooth



40Vmax 18V 14.4V 12Vmax 10.8V XGT LXT CXT DC 12V

AC Adaptor, AA Battery

**MR002G Job Site Radio**

12Vmax-40Vmax CXT LXT XGT Li-Ion Cordless Bluetooth Job Site Radio

Li-ion Ah 8.0 5.0 4.0 2.5 2.0




Frequency Band	FM/AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Speaker Size	Woofer: Dia. 89 mm x2
Max Output	40Vmax: 3.5 W x2
Bluetooth	Version: 5.0 Profile: A2DP / SCMS-T Supported Codec: SBC Max Transmission Range (Optimum): 10 m (33 ft)
Dimensions (L x W x H)	w/ Handle in Upright Position: 280 x 171 x 434 mm (11 x 6-3/4 x 17-1/8")
Net weight	4.6 - 5.4 kg (10.1 - 11.9 lbs.)

Bluetooth



40Vmax 18V 14.4V 12Vmax 10.8V XGT LXT CXT DC 12V

AC Adaptor, AA Battery

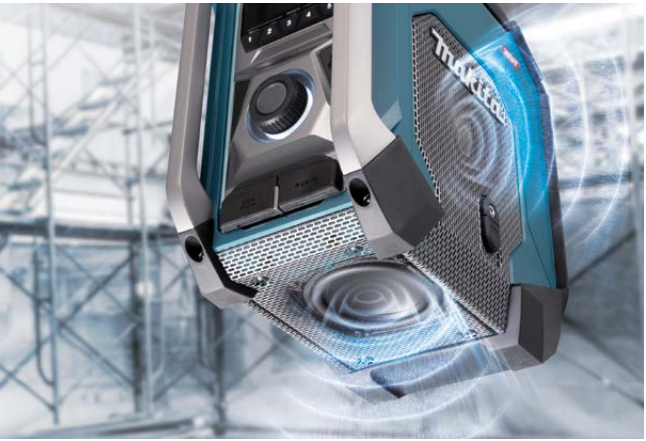

**DMR300 Job Site Radio**

12Vmax-18V CXT LXT Li-Ion Cordless Bluetooth Job Site Charger Radio

Li-ion Ah 6.0 5.0 3.0 1.5



Frequency Band	FM / AM: 87.5 - 108 MHz / 520 - 1,710 kHz
Speaker Size	Woofer: Ø89 mm x2
Bluetooth	Version: 4.2 Max Transmission Range (Optimum): 30 m (98 ft)
Dimensions (L x W x H)	285 x 185 x 305 mm (11-1/4" x 7-1/4" x 12")
Net weight	4.4 kg (9.7 lbs.)

Bluetooth



18V 14.4V 12Vmax 10.8V LXT CXT DC 12V

AC Adaptor, AA Battery

**DMR108 Job Site Radio**

7.2V-18V CXT LXT Li-Ion Cordless Bluetooth Job Site Radio

Li-ion Ah 6.0 5.0 3.0 1.5



Frequency Band	FM / AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Speaker Size	Woofer: Ø89 mm x2
Max Output	18V: 3.5 W x2 / 14.4V: 2.2 W x2 / 12Vmax: 1.2 W x2 / 7.2V: 0.5 W x2
Bluetooth	Version: 4.0 Profile: A2DP / SCMS-T Supported Codec: SBC Max Transmission Range: 10 m (33 ft)
Dimensions (L x W x H)	w/ Handle in Upright Position: 262 x 163 x 431 mm (10-3/8" x 6-3/8" x 17")
Net weight	4.4 kg (9.7 lbs.)

Bluetooth



18V 14.4V 12Vmax 10.8V 7.2V LXT CXT DC 12V

AC Adaptor, AA Battery

**DMR202 Cordless Job Site Speaker**

12Vmax / 14.4V / 18V CXT LXT Li-Ion Cordless Bluetooth Job Site Speaker

Li-ion Ah 6.0 5.0 3.0 1.5



Speaker Size	Woofer: Ø101.6 mm Tweeter: Ø36 mm
Bluetooth	Version: 4.0 Profile: A2DP / SCMS-T / AVRCP Supported Codec: SBC Max Transmission Range: 10 m (33 ft)
Dimensions (L x W x H)	w/ Handle in Retracted Position: 211 x 206 x 199 mm (8-5/16" x 8-1/8" x 7-7/8") w/ Handle in Upright Position: 211 x 206 x 286 mm (8-5/16" x 8-1/8" x 11-1/4")
Net weight	2.7 - 3.3 kg (5.9 - 7.3 lbs.)

Bluetooth



18V 14.4V 12Vmax LXT CXT DC 12V

AC Adaptor

**MR010G Cordless Radio with Lantern**

New

40Vmax XGT Cordless Bluetooth Radio with Lantern

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Frequency Band	FM: 87.5 - 108 MHz
Speaker Size	Ø57 mm
Illuminance (High/Low)*	Flashlight: 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65
Luminous flux (High/Low)	Flashlight: 200/100, Lantern: Daylight white 310/155, Neutral white 300/150, Warm white 260/130
Bluetooth	Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft)
Dimensions (L x W x H)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

Bluetooth

40Vmax XGT XPT

Strap Hook, Battery and Charger are sold separately

**DMR057 Cordless Radio with Lantern**

New

18V/14.4V LXT Cordless Radio with Lantern

Li-ion Ah 6.0 5.0 3.0 1.5



Frequency Band	FM: 87.5 - 108 MHz
Speaker Size	Ø57 mm
Illuminance (High/Low)*	Flashlight: 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65
Luminous flux (High/Low)	Flashlight: 200/100, Lantern: Daylight white 310/155, Neutral white 300/150, Warm white 260/130
Bluetooth	Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft)
Dimensions (L x W x H)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

Bluetooth

18V 14.4V LXT XPT

Strap Hook, Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



## Cordless Radio with Lantern that can be used at work, play, or anytime

### Lantern with 3 light tone settings

MR010G / DMR057 only



#### Warm white

You will feel relaxed.  
(about 2,500K)

#### Neutral white

(about 3,500K)

#### Daylight white

You can easily read what is written / printed.  
(about 5,000K)

### Switch

MR010G / DMR057    DMR055



- Brightness setting button (2 stages) (MR010G / DMR057 only)
- Lantern light tone setting button (3 tones) (MR010G / DMR057 only)
- On/off and Mode select button

### Continuous run time (approx)


On a single full battery charge

XGT 40Vmax MR010G (with BL4050F)			
Radio	Radio+Lantern	Lantern	Flashlight
51h	21h	34h	66h

### USB output port

MR010G / DMR057 only

- With USB output switch
- With Auto-off function
- Type A, 1 port, DCSV/ 2.4A



18V TEKAMPERION DMR057 (with BL1850B)			
Radio	Radio+Lantern	Lantern	Flashlight
44h	12h	16h	30h

18V TEKAMPERION DMR055 with BL1850B		
Radio	Radio+Lantern	Lantern
52h	12h	16h



### Flashlight

MR010G / DMR057 only

- Daylight white single LED
- Brightness settings (2 stages)



• Lens guard also works as an FM antenna.

• LCD digital display

Photo: MR010G



### ML009G Cordless Worklight

New

XGT LXT Li-Ion Cordless 96 LED Worklight, 10,000 Lumens

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Run Time (hrs)	w/ BL4040x2, Low/Mid/High: 14 / 6.5 / 2.4 at 1m from the light source:
Illuminance (High / Mid / Low)	4,300 / 1,900 / 1,000 lx at 3 m from the light source:
Luminous Flux	500 / 230 / 110 lx High / Mid / Low: 10,000 / 4,000 / 2,000 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 248 x 386 x 305 mm, w/ Handle in Upright Position: 248 x 386 x 430 mm
Net weight	6.4 - 9.9 kg (14.1 - 21.8 lbs.)

40Vmax 18V 14.4V XGT LXT

Anti-glare film, Battery and Charger are sold separately

### ML005GX Cordless Worklight

New

40Vmax XGT Li-Ion Cordless LED Worklight, 3,600 Lumens

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Illuminance (High / Mid / Low)	at 1m from the light source: 2,100 / 1,000 / 500 lx
Luminous Flux	High / Mid / Low: 3,600 / 1,800 / 900 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 248 x 309 x 296 mm (9-3/4 x 12-1/8 x 11-5/8")
Net weight	4.6 - 6.5 kg (10.1 - 14.3 lbs.)

40Vmax 18V 14.4V XGT LXT

Battery and Charger are sold separately





**Lighting coverage\***  
\*measured in accordance with ANSI

**Long-distance irradiation**  
**640m**  
Spot mode

**Front 2.3m**  
(side: 2.6m)

**Front 2.8m**  
(side: 3.0m)

**Front 2.8m**  
(side: 3.0m)

**Front 4.5m**  
(side: 5.3m)  
DML813

**Front 4.7m**  
(side: 5.6m)  
DML814

**Front 6.0m**  
(side: 6.0m)  
DML811

DML805    ML003G    DML812    ML007G    DML813 / DML814    DML811

**Luminous flux**

**18V**  
DML805  
**750 lm**

**18V 40V max**  
ML003G  
**1,100 lm**

**18V 40V max**  
DML812    ML007G  
**1,250 lm**  
Spot+Flood mode

**18V**  
DML813 / DML814    DML811  
**3,000 lm**

**ML007G Cordless Flashlight**

40Vmax XGT Li-Ion Flashlight Provides 500 Lumens

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Run Time (hrs)	Up to: 14 (Spot, with BL4050F)
Illuminance	Spot / Flood / Spot-Flood: 82,000 / 520 / 60,000 lx
Luminous Flux	Spot / Flood / Spot-Flood: 600 / 1,000 / 1,250 lm
Dimensions (L x W x H)	w/ BL4025: 330 x 120 x 118 mm (13 x 4-3/4 x 4-5/8")
Net weight	1.6 - 2.9 kg (3.5 - 6.4 lbs.)

**40Vmax** XGT XPT  
Battery and Charger are sold separately

**DML812 Cordless Flashlight**

LED Flashlight, 1,250 Lumens


Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Run Time (hrs)	Up to: 10 (Spot, with BL1860B)
Illuminance	at 1m from the light source Spot Mode / Flood Mode / Spot-Flood Mode: 71,000 / 520 / 51,000 lx
Luminous Flux	Spot Mode / Flood Mode / Spot-Flood Mode: 600 / 1,000 / 1,250 lm
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 313 x 119 x 115 mm (12-3/8" x 4-11/16" x 4-1/2")
Net weight	1.2 - 1.6 kg (2.6 - 3.4 lbs)

**18V 14.4V** LXT XPT 8  
Strap Hook. Battery and Charger are sold separately

Illuminance: at 1m from the light source

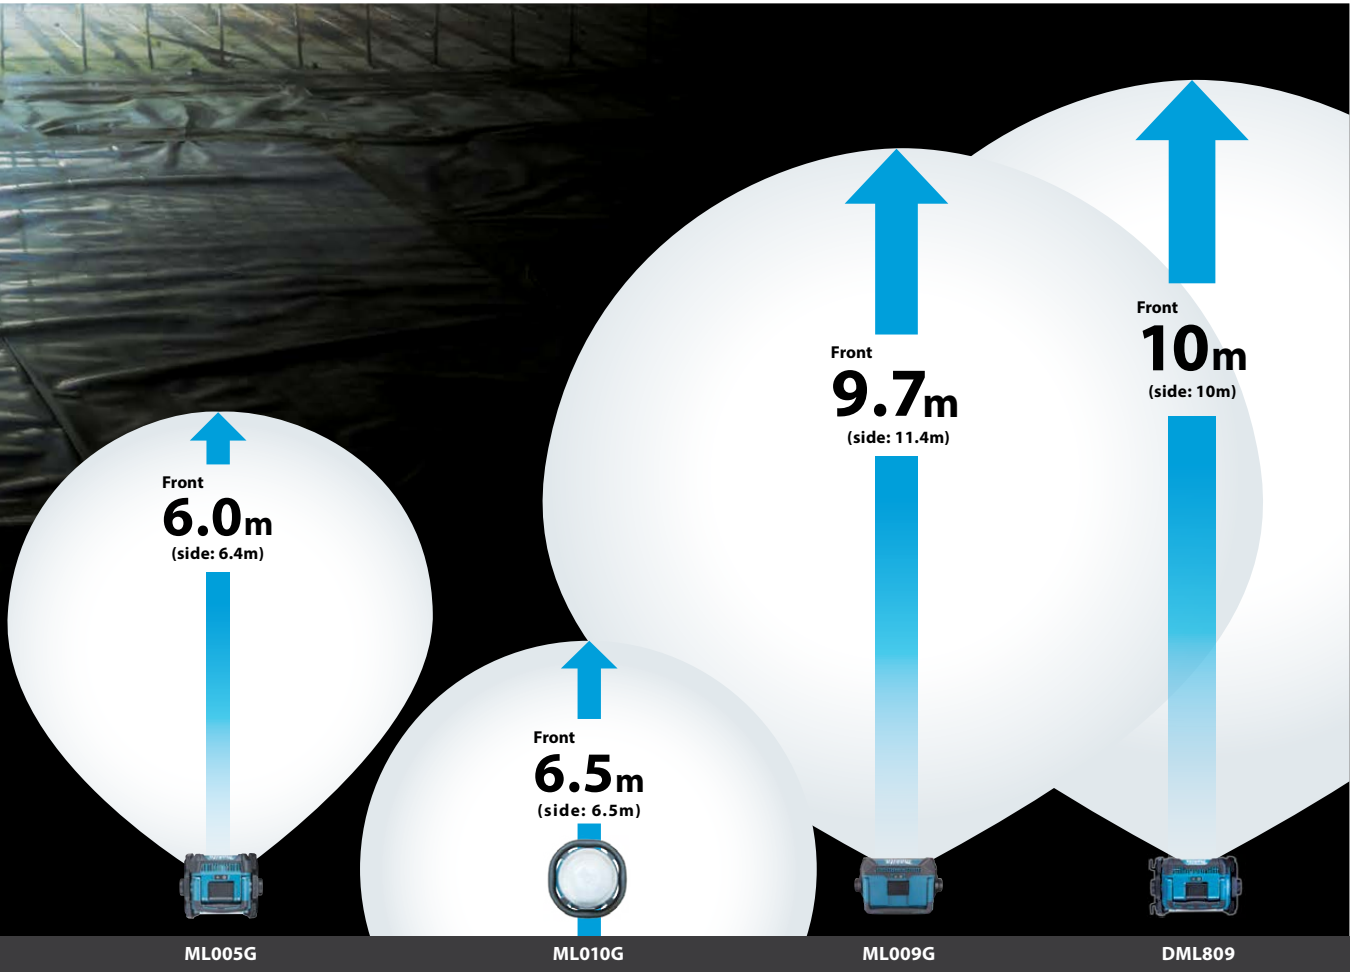

**18V 40V max**  
ML005G  
**3,600 lm**

**18V 40V max**  
ML010G  
**5,500 lm**

**18V 40V max**      **18V**  
ML009G      DML809  
**10,000 lm**

### ML001G LED Flashlight

40Vmax XGT Li-Ion LED Flashlight, 160 Lumens

Li-ion	8.0	5.0	4.0	2.5	2.0
--------	-----	-----	-----	-----	-----

Run Time (hrs)	Up to: 55
Luminous Flux	160 lm
Illuminance	at 1m from the light source: 3,000 lx
Dimensions (L x W x H)	w/ BL4025: 281 x 88 x 121 mm (11-1/8 x 3-1/2 x 4-3/4") w/ BL4040: 287 x 88 x 136 mm (11-1/4 x 3-1/2 x 5-3/8")
Net weight	1.0 - 1.3 kg (2.2 - 2.9 lbs.)

**40Vmax** **XGT** **12**

Strap Hook. Battery and Charger are sold separately

### DML815 18V, 14.4V Cordless LED Flashlight

18V / 14.4V LXT Li-Ion LED Flashlight, 160 Lumens

Li-ion	6.0	5.0	3.0	1.5
--------	-----	-----	-----	-----

Run Time (hrs)	Up to: 54
Luminous Flux	160 lm
Illuminance	at 1m from the light source: 3,000 lx
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 272x79x116 mm (10-3/4"x3-1/8"x4-9/16")
Net weight	0.26 - 0.93 kg (0.57 - 2.05 lbs.)

**18V 14.4V** **5**

Strap Hook. Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

**ML106 Cordless Flashlight**

Multifaceted Reflector Illuminates Evenly for Increased Visibility

Li-ion Ah 4.0 2.0 1.5



Run Time (hrs)	Up to: 12
Luminous Flux	190 lm
Luminous	at 1m from the light source: 170 - 4,500 lx
Dimensions (LxWxH)	w/ BL1016/BL1021B: 271 x 66 x 93 mm (10-5/8 x 2-5/8 x 3-5/8")
	w/ BL1041B: 290 x 66 x 93 mm (11-3/8 x 2-5/8 x 3-5/8")
Net weight	0.61 - 0.78 kg (1.3 - 1.7 lbs.)

12Vmax



Strap Hook. Battery and Charger are sold separately

**ML002G Cordless LED Worklight**

40Vmax XGT Li-Ion 21 LED Worklight, 710 Lumens

Li-ion Ah 5.0 4.0 2.5 2.0



Run Time (hrs)	Up to: 51
Main light (on bar side)	Luminous flux (Full brightness): 710 lm Illuminance (Full brightness): 340 lx Luminous flux (Half brightness): 340 lm Illuminance (Half brightness): 310 lx
Sub light (on top side)	Luminous flux: 130 lm Illuminance: 1,900 lx
Dimensions (L x W x H)	w/ BL4025: 376 x 86 x 126 mm w/ BL4040: 382 x 86 x 141 mm
Net weight	1.2 - 1.5 kg (2.7 - 3.3 lbs.)

40Vmax



Battery and Charger are sold separately

Length (with the hook stood). Illuminance: at 50 cm from the light source

**DML806 / DML807 Cordless LED Flashlight**

18V / 14.4V LXT Li-Ion 21 LED Flashlight

Li-ion Ah 6.0 5.0 3.0 1.5



Run Time (hrs)	DML806 / DML807:
Main Light	Up to: 21 / 23
Sub Light	Up to: 59 / 36
Luminous Flux (Max)	DML806 / DML807: 620lm / 710lm
Dimensions (LxWxH)	DML806: 365x78x119 mm DML807: 414x79x155 mm
Net weight	DML806: 0.69 - 1.1 kg DML807: 0.72 - 1.1 kg

Length (with hook retracted), Overall length (with hook in upright position)

18V 14.4V



Battery and Charger are sold separately

**ML006G Cordless Flashlight**

40Vmax XGT Li-Ion Flashlight Provides 500 Lumens

Li-ion Ah 5.0 4.0 2.5 2.0



Run Time (hrs)	Up to: 82
Illuminance (at 0.5m from the light source)	(Low mode, with BL4040) High / Medium / Low: 800 / 400 / 180 lx
Luminous Flux	High / Medium / Low: 500 / 250 / 100 lm
Dimensions (L x W x H)	w/ BL4040: 275 - 408 x 85 x 148 mm (10-7/8 - 16 x 3-3/8 x 5-7/8")
Net weight	1.1 - 1.7 kg (2.4 - 3.8 lbs.)

40Vmax



Shoulder hook set, Lamp shade, Battery and Charger are sold separately

**Rotatable and foldable light head**



**Foldable light head**



**Rotatable light head (90° right and 180° left)**



Can be used as a compact stationary lamp with the light head swivelled and folded fully.

Max luminous flux  
**500 lm**



**DML816 Cordless Flashlight**

18V LXT Li-Ion Flashlight Provides 500 Lumens

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Run Time (hrs)	Up to: 75 (Low mode, with BL1860B)
Illuminance (at 0.5m from the light source)	High / Medium / Low: 800 / 400 / 180 lx
Luminous Flux	High / Medium / Low: 500 / 250 / 100 lm
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 267 - 400 x 79 x 127 mm (10-1/2 - 15-3/4 x 3-1/8 x 5")
Net weight	0.70 - 1.1 kg (1.5 - 2.4 lbs.)

18V 14.4V **LXT XPT**

Shoulder hook set, Lamp shade, Battery and Charger are sold separately

**ML011G Cordless Worklight**

**New**

40Vmax XGT Li-Ion Cordless Worklight, 300 Lumens

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm
Run time (hrs)	w/ BL4040, at 300 lm: 37, w/ BL4040, at 150 lm: 64
Dimensions (L x W x H)	w/o Battery: 107 x 77 x 50 mm
Net weight	0.19 kg (0.42 lbs.)

40Vmax **XGT USB**

Warm color cover, Battery and Charger are sold separately

**DML817 Cordless Worklight**

**New**

18V/14.4V LXT Li-Ion Cordless Worklight, 300 Lumens

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm
Run time (hrs)	w/ BL1860B, at 300 lm: 28, w/ BL1860B, at 150 lm: 49
Dimensions (L x W x H)	107 x 77 x 50 mm
Net weight	0.21 kg (0.46 lbs.)

18V 14.4V **LXT USB**

Warm color cover, Battery and Charger are sold separately

**ML107 Cordless Worklight**

**New**

12Vmax CXT Li-Ion Cordless Worklight, 200 Lumens

Li-ion Ah 4.0 | 2.0 | 1.5



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 175 / 130 / 130 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 200 / 100 / 100 lm
Run time (hrs)	w/ BL1041B, at 300lm: 17, w/ BL1041B, at 150lm: 29
Dimensions (L x W x H)	w/o Battery: 92 x 54 x 47 mm
Net weight	0.29 kg (0.13 lbs.)

12Vmax **CXT USB**

Warm color cover, Battery and Charger are sold separately



**MP001GZ Cordless Inflator**

3 Inflation modes (High speed, Low speed or Ball modes)

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Air Discharge Amount	200 kPa: 24 L/min 700 kPa: 12 L/min 1
Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]
Hose Length	65 cm (25-1/2")
Sound Pressure	71 dB(A)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 320 x 108 x 231 mm (12-5/8 x 4-1/4 x 9-1/8"), w/ BL4040: 329 x 108 x 231 mm (13 x 4-1/4 x 9-1/8"), w/ BL4050F: 351 x 108 x 231 mm (13- 3/4 x 4-1/4 x 9-1/8")
Net Weight	2.9 - 3.5 kg (6.4 - 7.7 lbs.)

40Vmax **3** **XGT XPT** **4**

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are sold separately

**DMP181Z Cordless Inflator**

18V max LXT Li-Ion Cordless Inflator

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Air Discharge Amount	200 kPa: 22 L/min 700 kPa: 11 L/min 1
Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]
Hose Length	65 cm (25-1/2")
Sound Pressure	70 dB(A)
Dimensions (L x W x H)	w/ BL1815N / BL1820B: 297 x 108 x 231 mm (11-3/4 x 4-1/4 x 9-1/8") w/ BL1830B / BL1840B / BL1850B / BL1860B: 316 x 108 x 231 mm (12-1/2 x 4-1/4 x 9-1/8")
Net Weight	2.5 - 2.8 kg (5.5 - 6.2 lbs.)

18V **3** **LXT XPT** **4**

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

## DMP180Z Cordless Inflator

18V max LXT Li-Ion Cordless Inflator

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max Air Pressure 830 kPa (121 PSI)  
 Air Discharge amount 200 kPa: 10 L/min  
 Dimensions (L x W x H)  
 w/BL1830B / BL1850B / BL1860B:  
 270x76x175 mm  
 (10-5/8"x3"x6-7/8")  
 Net weight 1.5 - 1.8 kg (3.3 - 4.0 lbs.)

18V



LXT

4

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger,  
 Z: Battery and Charger are sold separately

## MP100DZ Cordless Inflator

12Vmax CXT Li-Ion Cordless Inflator

Li-ion Ah 4.0 | 2.0 | 1.5



Max Air Pressure 830 kPa  
 Air Discharge amount 200kPa: 10 L/min  
 Dimensions (L x W x H)  
 w/BL1016/BL1021B:  
 235x74x173 mm  
 (9-1/4"x2-15/16"x6-13/16")  
 w/BL1041B:  
 255x74x173 mm  
 (10"x2-15/16"x6-13/16")  
 Net weight 1.2 - 1.3 kg (2.6 - 3.0 lbs.)

12Vmax



CXT

4

Valve adapter, Ball adapter, Floating tube adapter,  
 DZ: Battery and Charger are sold separately

## AS001GZ02 Cordless Dust Blower

Achieves higher blowing force

Li-ion Ah 5.0 | 4.0 | 2.5 | 2.0



Max blowing force Mode:4/3/2/1:  
 2.8/2.3/1.7/1.1 N  
 Max air volume Mode:4/3/2/1:  
 1.1/1.0/0.8/0.6 m<sup>3</sup>/min  
 10.3 kPa  
 Max sealed suction 10.3 kPa  
 Continuous Use (min.) Mode:4/3/2/1:  
 13/17/25/50  
 Sound Pressure Level 79 dB(A)  
 Vibration Emission 2.5 m/s<sup>2</sup> or less  
 Dimensions (L x W x H) w/BL4020 / BL4025:  
 180 x 94 x 248 mm  
 (7-1/8 x 3-11/16 x 9-3/4")  
 Net weight 1.5 - 2.3 kg (3.3 - 5.1 lbs.)

40Vmax



4



3

Nozzle 3, Nozzle 7, Nozzle 13, Pinch valve nozzle, Wide range nozzle, Battery, Charge, Country-specific Flexible nozzle complete, Air vent  
 hose complete, Rubber attachment 20-30, Rubber attachment, Filter C complete, Belt clip, Z: Battery and Charger are sold separately

## DAS180Z Cordless Dust Blower

18V LXT BL Cordless Air Duster

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Air volume 0-1.1 m<sup>3</sup>/min  
 Air velocity 0-150 m/s  
 Air pressure 0-18.0 kPa  
 Blowing force Mode 1: 0-1.1 N  
 Mode 4: 0-2.8 N  
 Max Sealed Suction 9.3 kPa  
 Continuous Use (min.) BL1860B, Mode 1: 55  
 BL1860B, Mode 4: 15  
 Dimensions (L x W x H) w/o Battery:  
 173 x 92 x 247 mm  
 (6-13/16 x 3-5/8 x 9-3/4")  
 Net weight 1.2 - 1.7 kg (2.6 - 3.7 lbs.)

18V



LXT



Nozzle, Pinch valve nozzle, Wide range nozzle, Flexible nozzle, Air vent hose, Rubber attachment, Filter, Belt clip,  
 Battery, Charger, Z: Battery and Charger are sold separately

New



Photo: AS001G



Blowing



Inflating



Deflating

Max air velocity

200  
m/s

[with Nozzle 7 / mode: 4]

Max air volume

1.1  
m<sup>3</sup>/min

[without Nozzle / mode: 4]

## A wide range of applications

Can be used for a wide range of applications by replacing the tip nozzle

XGT  
40Vmax  
Li-ionOne-touch  
nozzle  
replacementHanging  
hole4 stage air  
volumeVariable  
speed control  
by trigger

## Safety Precautions

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

### /// KEEP WORK AREA CLEAN.

Cluttered areas and benches invite injuries.

### /// CONSIDER WORK AREA ENVIRONMENT.

Don't use power tools in damp or wet locations. Keep work area well lit. Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

### /// KEEP CHILDREN AWAY.

All visitors should be kept away from work area. Don't let visitors touch the tool or extension cord.

### /// STORE IDLE TOOLS.

When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

### /// DON'T FORCE THE TOOL.

It will do the job better and safer at the rate for which it was intended.

### /// USE THE RIGHT TOOL.

Don't force small tools or attachments to do the job of a heavy-duty tool. Don't use tools for purposes not intended.

### /// DRESS PROPERLY.

Don't wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

### /// USE SAFETY GLASSES.

Also use face or dust mask if the cutting operation is dusty.

### /// DON'T ABUSE THE CORD.

Never carry the tool by the cord or yank it to disconnect it from the socket. Keep the cord away from heat, oil, and sharp edges.

### /// SECURE WORK.

Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

### /// DON'T OVERREACH.

Keep proper footing and balance at all times.

### /// MAINTAIN TOOLS WITH CARE.

Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

### /// DISCONNECT TOOLS.

When not in use, before servicing and when changing accessories such as blades, bits and cutters.

### /// REMOVE ADJUSTING KEYS AND WRENCHES.

Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

### /// AVOID UNINTENTIONAL STARTING.

Don't carry a plugged-in tool with a finger on the switch. Ensure switch is OFF when plugging in.

### /// USE OUTDOOR EXTENSION CORDS.

When tool is used outdoors, use only extension cords intended for outdoor use.

### /// STAY ALERT.

Watch what you are doing. Use common sense. Don't operate tool when you are tired.

### /// CHECK DAMAGED PARTS.

Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

### /// GUARD AGAINST ELECTRIC SHOCK.

Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

### /// REPLACEMENT PARTS.

When servicing a tool, use only identical replacement parts.

### /// VOLTAGE WARNING:

Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.

## Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Net weight and dimensions may differ by the type of battery.
- Standard export color for motor housing is Makita industrial green (blue).
- Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ 2003.

## Warranty

Every MAKITA tool is thoroughly inspected and tested before leaving the factory. Subject to the following Terms and Conditions from the date of purchase, this tool is **warranty against defective materials and manufacturing defects for a period of 6 MONTHS for AC and non brushless DC tools. As for brushless DC tools it will be a period of 12 MONTHS. Same goes to Makita charger warranty, against defective materials and manufacturing defects for a period of 12 MONTHS. As for Makita Light will be a period of 6 MONTHS.**

### The period and conditions of our warranty as follows:

1. Sales receipt must be presented when servicing or warranty is required.
2. Warranty ONLY cover tools distributed by Makita Singapore Pte. Ltd. Warranty does not cover tools purchased overseas or distributed by other countries.
3. **This warranty is valid base on the original purchase receipt with "Date of Purchase", "Model Number" & "Serial Number".**

### This warranty will be null & void in any of the following events during the warranty period:

















































1. The product unit has undergone repair, attempted repair, dismantle or modification in any way whatsoever by any other person.
2. Damage resulting from use of improper accessories, non-genuine replacement parts, disassembly, tampering, alternation and repairing in any way that affects the reliability and performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or usage of generator, wrong usage not in accordance with the Operation Manual.
5. If the Serial Number on the tool, seal on the battery and charger has been defaced or removed.
6. If any information on the warranty card has been defaced, removed, altered, unreadable or unclear (date of purchase, Serial Number, etc.)

\*\* Makita reserved the rights of amend conditions of warranty without prior notice.

Please visit our website for Makita's Service Centre information

<http://www.makita.com.sg/servicing-the-customer>

# Icon

 Double Insulation	 Torque Setting 9	 Bevel Cutting 45 LR	 Chain Brake
 Variable Speed	 Torque Setting 16	 Makita Shank Jig Saw Blade	 Anti Vibration
 Brake	 Torque Setting 18	 Bayonet Shank Jig Saw Blade	 Revolving Hose
 Reversing	 Torque Setting 20	 Laser Marker	 Static Free Hose
 Mechanical 2-Speed	 Torque Setting 21	 Orbital Cutting	 SDS-PLUS Shank
 Mechanical 3-Speed	 Torque Setting 21_41	 Hook & Loop	 SDS-MAX Shank
 Electronic 2-Speed	 Dust Collection	 Depth Adjustment	 17mm Hex Shank
 Electronic 3-Speed	 Torque Limiter	 Sequential and Bump-fire	 21mm Hex Shank
 Electronic 4-Speed	 Constant Speed	 Auto Firing Stop	 28.6mm Hex Shank
 Keyless Chuck	 Soft Start	 Automatic Oiling	 30mm Hex Shank
 Clutch-equipped	 Bevel Cutting 45 left	 Stainless Tank	 Built-in Job Light
 Torque Setting 6	 Bevel Cutting L45 R5	 Grass Tangle Removing Function	 Anti-restart function



[www.makita.com.sg](http://www.makita.com.sg)

## TRADEMARKS



Makita Corporation and its affiliates (collectively referred to as "Makita") are the registered owners of the above trademarks and own the exclusive rights to these trademarks. A party who manufactures, advertises, offers for sale, sells, distributes, imports or exports power tools, batteries and/or related accessories using a trademark which is identical or similar to our trademarks may have infringed our trademarks. Makita take a serious view of trademark infringement and will not hesitate to take any legal action against any party who infringes our trademark rights.

### Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
 Phone : +65-6546-8700 Fax : +65-6546-8711  
 Email : msgproductteam@makita.com.sg  
 Website : [www.makita.com.sg](http://www.makita.com.sg)  
 Facebook : [www.facebook.com/MakitaSG](http://www.facebook.com/MakitaSG)



Visit our website



PRINTED IN SINGAPORE