



Makita[®]

**MAINTENANCE & OUTDOOR
POWER EQUIPMENT
CATALOGUE
2026/27**



Safety Precautions

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

/// KEEP WORK AREA CLEAN.

Cluttered areas and benches invite injuries.

/// CONSIDER WORK AREA ENVIRONMENT.

Don't use power tools in damp or wet locations. Keep work area well lit. Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

/// KEEP CHILDREN AWAY.

All visitors should be kept away from work area. Don't let visitors touch the tool or extension cord.

/// STORE IDLE TOOLS.

When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

/// DON'T FORCE THE TOOL.

It will do the job better and safer at the rate for which it was intended.

/// USE THE RIGHT TOOL.

Don't force small tools or attachments to do the job of a heavy-duty tool. Don't use tools for purposes not intended.

/// DRESS PROPERLY.

Don't wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

/// USE SAFETY GLASSES.

Also use face or dust mask if the cutting operation is dusty.

/// DON'T ABUSE THE CORD.

Never carry the tool by the cord or yank it to disconnect it from the socket. Keep the cord away from heat, oil, and sharp edges.

/// SECURE WORK.

Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

/// DON'T OVERREACH.

Keep proper footing and balance at all times.

/// MAINTAIN TOOLS WITH CARE.

Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

/// DISCONNECT TOOLS.

When not in use, before servicing and when changing accessories such as blades, bits and cutters.

/// REMOVE ADJUSTING KEYS AND WRENCHES.

Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

/// AVOID UNINTENTIONAL STARTING.

Don't carry a plugged-in tool with a finger on the switch. Ensure switch is OFF when plugging in.

/// USE OUTDOOR EXTENSION CORDS.

When tool is used outdoors, use only extension cords intended for outdoor use.

/// STAY ALERT.

Watch what you are doing. Use common sense. Don't operate tool when you are tired.

/// CHECK DAMAGED PARTS.

Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

/// GUARD AGAINST ELECTRIC SHOCK.

Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

/// REPLACEMENT PARTS.

When servicing a tool, use only identical replacement parts.

/// VOLTAGE WARNING:

Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.

Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Net weight and dimensions may differ by the type of battery.
- Standard export color for motor housing is Makita industrial green (blue).
- Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ 2003.

Warranty

Every MAKITA tool is thoroughly inspected and tested before leaving the factory. Subject to the following Terms and Conditions from the date of purchase, this tool is **warranty against defective materials and manufacturing defects for a period of 6 MONTHS for AC and non brushless DC tools. As for brushless DC tools it will be a period of 12 MONTHS. Same goes to Makita charger warranty, against defective materials and manufacturing defects for a period of 12 MONTHS. As for Makita Light will be a period of 6 MONTHS.**

The period and conditions of our warranty as follows:

1. Sales receipt must be presented when servicing or warranty is required.
2. Warranty ONLY cover tools distributed by Makita Singapore Pte. Ltd. Warranty does not cover tools purchased overseas or distributed by other countries.
3. **This warranty is valid base on the original purchase receipt with "Date of Purchase", "Model Number" & "Serial Number".**

This warranty will be null & void in any of the following events during the warranty period:

1. The product unit has undergone repair, attempted repair, dismantle or modification in any way whatsoever by any other person.
2. Damage resulting from use of improper accessories, non-genuine replacement parts, disassembly, tampering, alternation and repairing in any way that affects the reliability and performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or usage of generator, wrong usage not in accordance with the Operation Manual.
5. If the Serial Number on the tool, seal on the battery and charger has been defaced or removed.
6. If any information on the warranty card has been defaced, removed, altered, unreadable or unclear (date of purchase, Serial Number, etc.)

** Makita reserved the rights of amend conditions of warranty without prior notice.

Please visit our website for Makita's Service Centre information

<http://www.makita.com.sg/servicing-the-customer>

* Warranty applicable only in Singapore.

Index	
A	
AS001GZ02	77
B	
CF001GZ	76
CF002GZ	75
CF003GZ	75
CL001GD115	15
CL001GZ04	15
CL001GZ12	15
CL003GZ09	16
CL003GZ14	16
CL004GZ NEW	16
CL100DW	17
CL106FDSA / DZ	17
CL108FDSA	17
CL117FDX2	17
CL200FDSA / FDZ NEW	17
CW001GZ	76
CW002GZ	76
CW003GZ	76
CW004GZ	76
D	
DAS180Z	77
DCF102Z	76
DCF203Z	76
DCF301Z	76
DCL180ZB	17
DCL184Z	14
DCL283FRFB / FZB	16
DCL284FRFB / FZB	17
DCL286FRFB / FZB	16
DCU601Z	39
DCU602Z	41
DCU603Z	41
DCU604Z	41
DCU605Z	41
DDG460ZX4	50
DG001GZ02	50
DHW080ZK	50
DHW180Z01	51
DLM230Z	47
DLM330Z	47
DLM382CF2 / Z	47
DLM462Z	47
DLM480Z	46
DLM481Z	46
DLM530Z	46
DLM532Z	46
DLM533Z	46
DLM538Z	46
DLM539Z	46
DML805	72
DML807	74
DML809	72
DML811	72
DML812	74
DML813	72
DML814	72
DML815	74
DML816	75
DML817	75
DML818	74
DML819 NEW	73
DMP180Z	77
DMR057	77
DMR108	77
DRC300Z	11
DUA301ZB	39
DUB184Z	34
DUB185Z	35
DUB186Z	34

D	
DUB187Z	34
DUB362Z	34
DUB363ZV	34
DUC150Z	39
DUC254Z	38
DUC258Z NEW	38
DUC353Z	37
DUC357ZX4	38
DUH506Z	42
DUH507F001 / Z	42
DUH606Z	41
DUH751Z	41
DUM111SYX	43
DUM604SF / Z	43
DUN461WZ	42
DUN500WZ	42
DUP181Z NEW	49
DUR189Z	44
DUR193RT / SF / Z	45
DUR368LZ	44
DUR369LZ	44
DUS054Z	49
DUS108Z	49
DUS158Z	49
DUX18Z	36
DUX60Z	36
DVC150LZ	13
DVC155LZX2	13
DVC350Z	17
DVC560PG2 / Z	13
DVC660ZX7	14
DVC750LZX1	14
DVC860LZ	13
DVC865LZX2	13
DVC867LZX4	13
DVF104Z	50
E	
ELM3320	48
ELM3720	48
ELM4121	48
ELM4620	48
H	
HW001GZ	50
HW102	51
HW1300	51
HW132	51
HW151	51
L	
LM001CZ	46
LM001GZ	45
LM002JM101	45
LM004GZ	45
LM004JZ	45
M	
ML001G	74
ML002G	74
ML003G	72
ML005GX	72
ML006GX	75
ML007G	74
ML009GX	72
ML010G	72
ML011G	75
ML012G	74
ML013G NEW	73
ML107	75
MP001GZ	77
MP100DZ	77
MR010G	77
P	
PDC01 (191A67-6)	32

P	
PDC1200A01 / A02	32
PDC1500A01	32
PM001GZ01	50
PS001GZ	11
U	
UA001GZ01	39
UA002GM102 / GZ01	39
UB001CZ	33
UB001GZ	33
UB002CZ01	34
UB002GZ	35
UB003CZ	33
UB003GZ NEW	33
UB004CZ	34
UB100DZ	35
UB101DZ	35
UB1102	35
UB1103	35
UB1103/B	35
UC003GZ01	37
UC012GT101 / GZ	36
UC014GT101 / GZ	36
UC015GT101 / GZ	36
UC022GZ	36
UC029GZ	38
UC030GZ NEW	37
UC031GZ NEW	37
UC100DZ	39
UC3541A	38
UC3551A	38
UC4041A	38
UC4051A	38
UC4551A	38
UH006GZ	41
UH014GZ	41
UH020GZ	42
UH201DZ	43
UH353DZ	42
UM600DWA / DZ	43
UN001GZ	42
UN460WDZ	43
UP100DZ	49
UR003GZ	44
UR008GZ01	44
UR012GZ04	43
UR013GZ03	44
UR017GZ	44
UR100DWA / DZ	45
UR202CZ	44
UR3000	45
US053DZ	50
UV001GZ	48
UX01GZ	36
V	
VC003GLZ	12
VC004GLZ	13
VC006GMZ03	12
VC008GZ04	14
VC010GZ	13
VC011GZ	14
VC014GLZ NEW	14
VC2000L	15
VC2510L	15
VC3210L	15
VC3210L/B	15
VS001GZ	12




Li-ion Battery & Charger Time Reference, Compatibility Chart

	Fast Charging		DC40RC (191M92-9)		BCC01 With dedicated charger DC4002		BCC02 With dedicated charger DC4002			
	DC40RA (191E08-6)	DC40RB* (191N14-5) Charges two XGT batteries simultaneously.	The practical charging time	Full battery charge	The practical charging time	Full battery charge	4 ports	8 ports	4 ports	8 ports
8.0Ah BL4080F (191X65-8) BL4080H (1916T7-4)			60 min.	76 min.	130 min.	170 min.	280 min.	560 min.	-	-
5.0Ah BL4050F (191L47-8)			38 min.	50 min.	65 min.	85 min.	175 min.	350 min.	-	-
4.0Ah BL4040F (1910N6-8) BL4040 (191B26-6)			31 min.	45 min.	52 min.	67 min.	145 min.	290 min.	145 min.	435 min.
2.5Ah BL4025 (191B36-3)			19 min.	28 min.	27 min.	38 min.	90 min.	180 min.	90 min.	270 min.
2.0Ah BL4020 (191L29-0)			15 min.	22 min.	22 min.	30 min.	75 min.	150 min.	75 min.	225 min.

	Fast Charging		Fast Charging		DC185D (194534-4)			DC185J (1918B9-6)			BCC01 With dedicated charger DC4002 + ADP10 (191C11-5)	
	DC40RA + ADP10 (191C11-5)	ADP10 + DC40RC (191C11-5)	DC18RC (195586-8) 110V - (195582-6)	DC18RD* (196934-4)	DC185D	DC185H*	PD 60W	PD 80W	PD 100W	4 ports	8 ports	
12.0Ah BL18120 (1915J2-8)			70 min.	175 min.	120 min.	265 min.	280 min.	210 min.	220 min.	330 min.	660 min.	
9.0Ah BL1890 (1915H4-0)			59 min.	135 min.	85 min.	200 min.	215 min.	155 min.	150 min.	250 min.	500 min.	
6.0Ah BL1860B (197422-4)			40 min.	85 min.	55 min.	130 min.	145 min.	105 min.	100 min.	160 min.	320 min.	
5.0Ah BL1850B (197280-8)			35 min.	70 min.	45 min.	110 min.	120 min.	90 min.	84 min.	135 min.	270 min.	
3.0Ah BL1830B (197599-5)			22 min.	42 min.	22 min.	60 min.	70 min.	50 min.	48 min.	80 min.	160 min.	
2.0Ah BL1820B (197254-9)			24 min.	33 min.	24 min.	45 min.	50 min.	39 min.	38 min.	55 min.	110 min.	
1.5Ah BL1815N (196449-1)			15 min.	22 min.	15 min.	30 min.	35 min.	28 min.	27 min.	40 min.	80 min.	

	DCB18WA (1915V6-4)
2.0Ah BLB182 (1915F4-6)	90min.

	Fast Charging		DC10WD (197371-5)	
	DC105B (197370-7) 110V - (197435-5)	DC18RE (198446-3)**	4 ports	8 ports
5.0Ah BL1050B (1913G0-9)			76min.	160min.
4.0Ah BL1041B (197406-2)			60min.	130min.
2.0Ah BL1021B (197396-9)			30min.	70min.
1.5Ah BL1016 (197393-5)			22min.	50min.

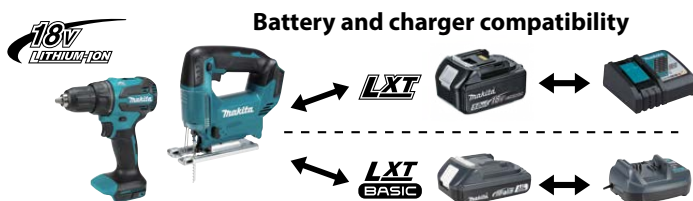

Charge the LXT batteries with the LXT battery chargers and the LXT BASIC battery with the LXT BASIC battery charger. **Please refer to page 5 for the BLB182 compatibility list.*

* DC40RB / DC18RD / DC18SH: Two Port Multi Fast Charger

		DC64WA (191W23-8)			DC10WA (194589-9)	PDC1500	PDC1200	DC4001 (191L01-2)	PDC01	
10.0Ah BL64100 (191Y69-6)		300 min.	10.8V Lithium-ion	1.5Ah BL1015K (1913U9-9)	55 min.		35.5Ah PDC1200	360 min.		Powered by up to four 18V LXT Batteries
4.0Ah BL6440 (191R06-8)		120 min.	7.2V Lithium-ion	1.5Ah BL0715 (1913W2-7)	35 min.	18V x2 Lithium-ion	43.55Ah PDC1500	450 min.	18V x2 Lithium-ion	

Power Converter

Transform DC power into AC power instantly!

- For emergency power source
- For where AC outlet is not available
- For outdoor leisure activities

Equipped with various output terminals

AC output** x2	USB output Type-A x2	**Output voltage and outlet shape vary depending on the country.
USB output Type-C x2	DC output 12V/10A Cigar socket	



Max output*
2,800W(VA)

*Rating value for 4 seconds

Continuous rating output
1,400W(VA)

AC output
50/60 Hz switchable
with pure sine wave

Battery Charging Case

With multiple charging ports for 40Vmax XGT Li-Ion batteries


BCC01: 8 ports

BCC02: 12 ports



Switch charging of batteries attached to multiple ports

Capable of charging all batteries on four ports simultaneously. Equipped with a feature that automatically switches batteries to charge them.



18V batteries can be charged using an adapter (BCC01 only)



Interchangeable adapter ADP10

BLB182 Compatibility List



Model								
CF003G	DCL284F	DDF490	DHP489	DML805	DPJ180	DTD153	DTW700	DVC560
CW001G	DCL286F	DFL650	DHP490	DML807	DPT353	DTD154	DUB185	DVC660
CW002G	DCM501	DFL651F	DHR183	DML809	DPV300	DTD156	DUB186	DVC665
CW003G	DCO181	DFN350	DHW080	DML810	DRC300	DTD157	DUB187	DVP181
CW004G	DCU601	DFT025F	DHW180	DML811	DRT50	DTD173	DUB362	DWR180
DBN610	DCU602	DFT060F	DJN161	DML812	DRT52	DTD201	DUC150	DWT310
DBO180	DCU603	DFT060T	DJR183	DML813	DRV250	DTL061	DUH506	ML003G
DBO380	DCU604	DFT087F	DJR188	DML814	DSC163	DTL063	DUH507	ML005G
DBO481	DCU605	DFT120T	DJR189	DML815	DSC191	DTL302	DUH751	ML009G
DBO482	DCW180	DFT129F	DJS101	DML816	DSL801	DTM51	DUN461W	ML010G
DBS180	DDA351	DGP180	DJS161	DML817	DST121	DTM52	DUN500W	PDC01
DCF102	DDF083	DHG180	DJV182	DML818	DST421	DTR181	DUR181	
DCF203	DDF458	DHG181	DJV184	DMP180	DTC102	DTW1001	DUR189	
DCF301	DDF482	DHK180	DJV186	DMR057	DTC103	DTW1002	DUR193	
DCG180	DDF484	DHP482	DMC300	DMR108	DTC104	DTW1005	DUR368	
DCL180	DDF486	DHP484	DML184	DPB180	DTC301	DTW190	DUT130	
DCL184	DDF487	DHP486	DML185	DPB182	DTC303	DTW251	DUX60	
DCL283F	DDF489	DHP487	DML186	DPB184	DTD152	DTW300	DVC350	




40V Li-ion max

High Power

Durability

Digital Communication

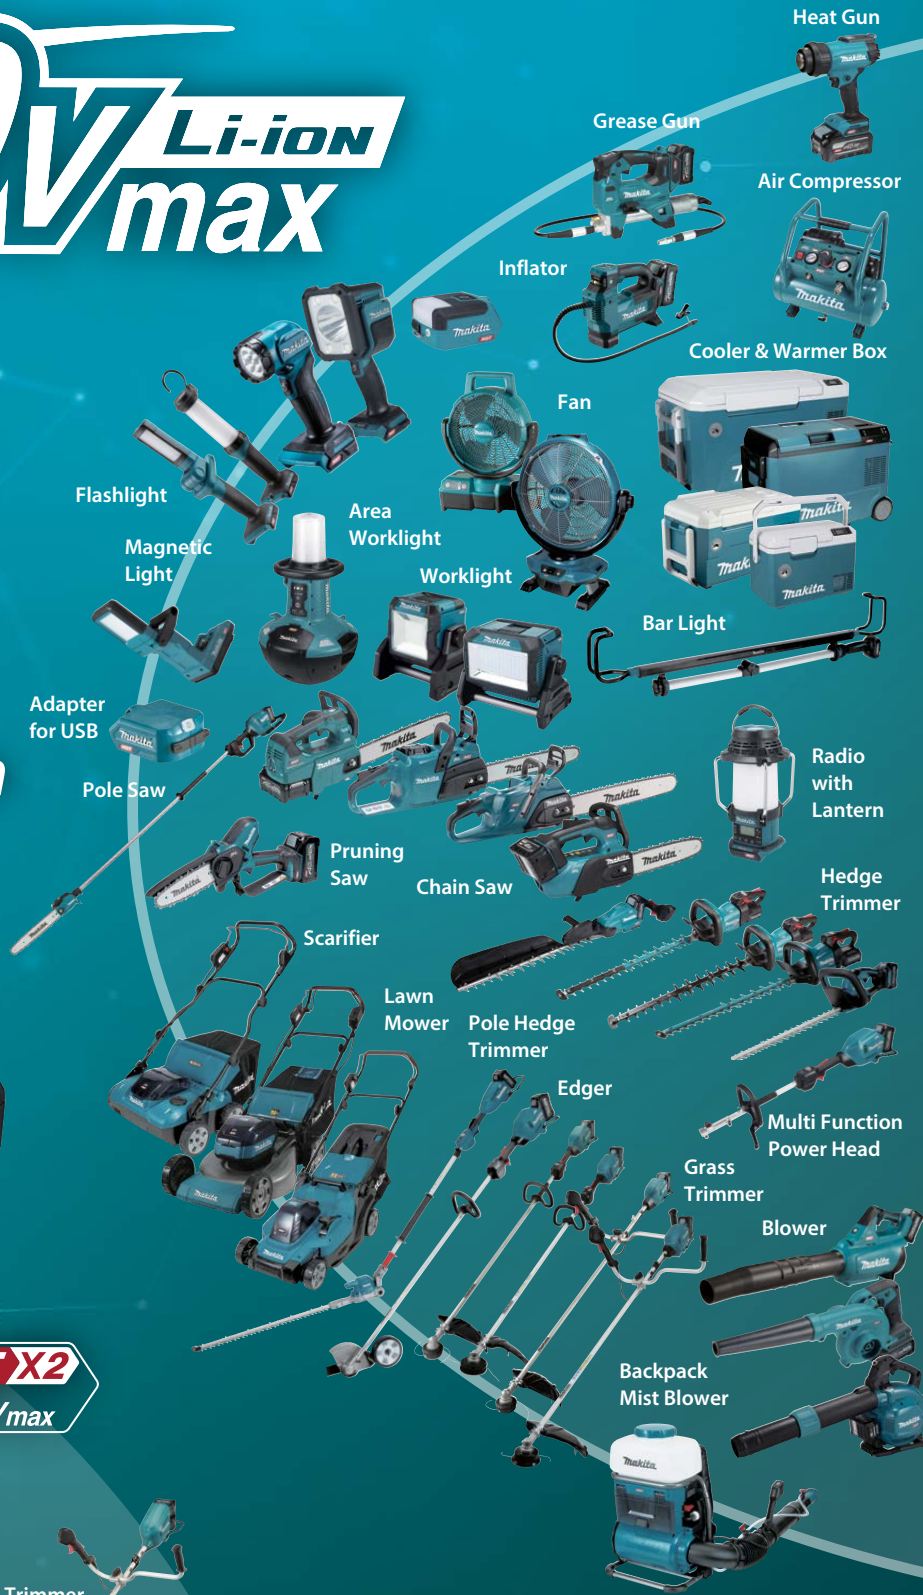

40V Li-ion max

XGT X2 80V max



Rotary Hammer



Breaker



Grass Trimmer



Demolition Hammer



Power Cutter



Vacuum Cleaner

Battery

BL4020
2.0Ah

BL4025
2.5Ah

BL4040
4.0Ah

BL4040F
4.0Ah



Impact Driver

Driver Drill

Hammer Driver Drill

Rotary Hammer

Demolition Hammer

Die Grinder

Shear Wrench

Combination Hammer

Random Orbit Sander

Impact Wrench

Earth Auger

Mixer

Orbital Sander

Angle Grinder

Communication connector

Polisher

Steel Rod Cutter

Multi Tool

Power Cutter

Hole Puncher



240+ TOOLS

Plunge Cut Saw

Jig Saw

Slide Compound Miter Saw

Metal Cutter

Dust Blower

High Pressure Washer

Backpack Vacuum Cleaner

Polisher Scrubber

Rebar Tying Tool

Circular Saw

Router

Vacuum Sweeper

Vacuum Cleaner

Upright Cleaner

Cleaner

Planer

Brad Nailer

Trimmer

Recipro Saw

Portable Band Saw

Charger

BL4050F 5.0Ah

BL4080F 8.0Ah

BL4080H 8.0Ah

DC40RA

DC40RB

DC40WA

DC40RC

ADP10



Adapter for LXT Battery

Multi Function Power Head



Pole Saw

Grass Trimmer

Lawn Mower



Earth Auger



Wheelbarrow



Blower



Impact Wrench



Vacuum Cleaner



Mixer



Driver Drill



18V x2

420+ TOOLS

6.0Ah 5.0Ah 4.0Ah 3.0Ah 2.0Ah 1.5Ah

Angle Drill



Angle Impact Wrench



Ratchet Wrench



Steel Rod Cutter



Impact Driver



Hammer Driver Drill



Rotary Hammer



Combination Hammer



Multi Tool



Power Scraper



Die Grinder



Sander Polisher



Random Orbit Polisher



Finishing Sander



Random Orbit Sander



Angle Grinder



Recipro Saw



Nibbler



Drywall Sander



Belt Sander



Cable Cutter



Compact Cut Off



Crimper



Cutter



Metal Cutter



Portable Band Saw



Expand Your Lithium Line Up



CLEANING EQUIPMENT

PS001GZ Cordless Polisher Scrubber

Wobble suppression and Constant speed control

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



No load speed	High / Med / Low: 600 / 350 / 150 min ⁻¹
Attachment size	Brush: 190 mm (7-1/2") Floor pad: 200 mm (7-7/8")
Telescopic pole	1,081 - 1,435 mm (42-1/2 - 56-1/2")
Continuous use	High / Med / Low: 30 / 50 / 140 min 189 mm (7-7/16")
Head height Dimensions (L x W x H)	1,081 - 1,435 x 204 x 361 mm (42-1/2 - 56-1/2 x 8 x 14-1/4")
Net weight	4.4 - 5.6 kg (9.7 - 12.3 lbs.)

40Vmax



XGT BL MOTOR XPT

Floor pad, Brush, Pad holder, Accessory bag, Splash guard, Battery, Charger, Z: Battery and Charger are sold separately

Stable operation is ensured by constant speed control and an anti-wobble structure.


Flexible head

With the two levers loosened, wobbling is reduced.



Springy splash guard

Using the splash guard with the brush or pad prevents water or cleaning agent from splashing.

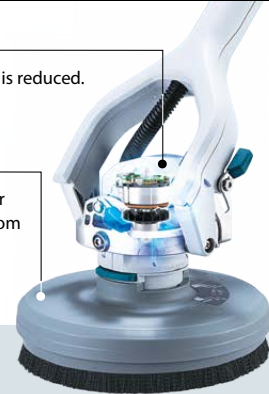

Brush/Pad replaceable without touching

When using the splash guard

Brush installation

Press the appliance lightly to the floor and pull the switch trigger.

Main power switch



Brush removal

Press the appliance lightly to the floor and pull the switch trigger.

Accessory removing button



3-speed settings

Selectable from three speed modes according to the work environment and conditions.



Speed mode / No load speed	Application
3. High / 600 min ⁻¹	For polishing smooth and glossy surfaces.
2. Med. / 350 min ⁻¹	Suitable for various tasks such as wax cleaning and interior floor polishing.
1. Low / 150 min ⁻¹	For tasks with high resistance on the pad/brush, such as anti-slip floors, and for tasks with reduced splashing of liquid.

Adjustable and easy-to-grip handle design



Telescopic pipe adjustable with a lever



XPT

Extension range **354 mm**

Cleaning wall edges/tilled-floor joints



When using the appliance without the splash guard, always lock the head of the appliance with levers.



LED job lights



DRC300Z Robotic Cleaner

18 V LXT BL Brushless Robotic Cleaner w/ Mapping Function

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Continuous Use (min.)	w/ BL1860B x2: 240
Max cleaning area	w/ BL1860B x2: 600 m ²
Max running speed	0.3 m/sec
Dust Box Capacity	3.0 L
Dimensions (L x W x H)	500 x 500 x 204 mm (19-3/4 x 19-3/4 x 8")
Net weight	9.6 - 10.6 kg (21.2 - 23.4 lbs.)

18V x2



Wireless remote controller (including two AAA alkaline batteries), Side Brush, Z: Battery and Charger are sold separately

Maximum cleaning area 600m² with mapping feature

LiDAR sensor

Camera sensor

The number of rooms that can be memorized is 5

Compatible with Smartphone app [Makita RoboPro DRC300]



Capable of cleaning dust or waste of all sizes

Dust collection function

Reduces flying-up dust captured by the brushes.

Dust container capacity
24L




Two Main brushes (Electric)

Side brush (Electric)

Excellent operating section

Control switches and indicators are located on the control panel of the handle.

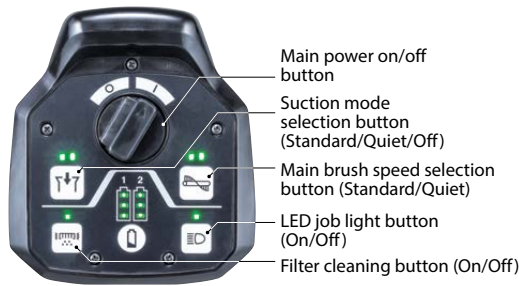

Dust pickup rate about
90%




The filter vibrates to remove dust adhering to the filter, reducing clogging.

Powerful cleaning with three motors

For filter cleaning

For dust collection

For Main brushes and Side brush

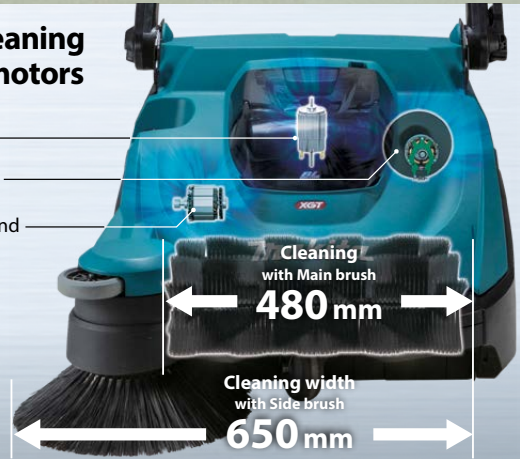

*Only motors for dust collection and Main/Side brushes are BL motors.

VS001GZ Cordless Vacuum Sweeper

40Vmax XGT BL Cordless 24 L Dust Class HEPA Vacuum Sweeper

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



1

Dust container capacity	24 L (6.3 gal)
Continuous use (approx.) on a full battery charge	w/ BL4080F x2: 150 min
Charging time approx.	w/ BL4080F x2, w/ DC40RA: 120 min
Sweeping capacity	2,600 m ² /h
Cleaning width	Main brush: 480 mm (18-7/8"), Side brush: 650 mm (25-1/2")
Dimensions (L x W x H)	w/ Handle in upright position: 830 x 677 x 1,146 mm (32-3/4 x 26-3/4 x 45")
Net weight	31-34 kg (68.3-74.9 lbs.)



Battery, Charger, Z: Battery and Charger are sold separately

VC006GMZ03 (Wet & Dry) Cordless Vacuum Cleaner

80Vmax XGT BL AWS Cordless 40L Dust Class M GYUPPA Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



1

Capacity	Dust / Water: 40 / 30 L
Max Air Flow	w/ Hose 28-3.5: 2.0 m ³ /min w/ Hose 38-2.5: 3.7 m ³ /min
Max Sealed Suction	18 kPa
Suction Power	350 W
Dimensions (L x W x H)	586 x 385 x 598 mm (23 x 15-1/8 x 23-1/2")
Net weight	18.4 - 20.8 kg (40.6 - 45.9 lbs.)



Floor nozzle, Straight pipe, Bent pipe, Hose, Dust bag, Corner nozzle, Front cuffs (22, 24), Wireless unit, Cap, Joint, Battery, Charger, Z: Battery and Charger are sold separately

VC003GLZ (Wet & Dry) Cordless Vacuum Cleaner

40Vmax BL Cordless 15L Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



1

Capacity	Dust / Water: 15 / 12 L
Continuous Use (min.)	BL4050F x2: 220
Max Air Flow	3.2 m ³ /min
Max Sealed Suction	23 kPa
Suction Power	310 W
Dimensions (L x W x H)	366 x 334 x 475 mm (14-3/8 x 13-1/8 x 18-3/4")
Net weight	8.3 - 10.2 kg (18.3 - 22.5 lbs.)



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately



VC004GLZ (Dry) Cordless Vacuum Cleaner

40Vmax BL AWS Cordless 15L HEPA GYUPPA Vacuum Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dust: 15 L
Continuous Use (min.)	BL4050F x2: 220
Max Air Flow	1.8 m ³ /min
Max Sealed Suction	23 kPa
Suction Power	205 W
Dimensions (L x W x H)	366 x 334 x 475 mm (14-3/8 x 13-1/8 x 18-3/4")
Net weight	8.5 - 10.4 kg (18.7 - 22.9 lbs.)

40Vmax



Powder Filter H Set, Damper Set, Pre Filter Set, Hose (38mm-2.5m), Cuff Lock, Stopper, Sleeve, Front cuffs (38,22, 24) Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

DVC155LZX2 (Wet & Dry) Cordless Vacuum Cleaner

18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water: 15 / 12 L
Max Air Flow	2.1 m ³ /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	7.2 - 7.9 kg (16.1 - 17.4 lbs.)

18V x2



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC865LZX2 (Wet & Dry) Cordless Vacuum Cleaner

18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water: 8 / 6 L
Max Air Flow	2.1 m ³ /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	7.0 - 7.7 kg (15.7 - 17.0 lbs.)

18V x2



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

VC010GZ Cordless Upright Cleaner

40Vmax XGT BL Brushless Cordless 5 L HEPA Upright Cleaner

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	5.0 L (169.1 oz)
Cleaning Width	381 mm (15")
Continuous Use (min.)	w/BL4050F, Max / Normal / Low: 25 / 50 / 100 min
Max Air Flow	1.8 m ³ /min
Max Sealed Suction	15 kPa
Suction Power	Max / Normal / Low Noise: 110 / 50 / 25 W
Dust pick-up rate	High / Normal / Low noise: 55 / 45 / 36 %
Dimensions (L x W x H)	326 x 381 x 1,146 mm (12-7/8 x 15 x 45")
Net weight	8.0 - 9.2 kg (17.6 - 20.3 lbs.)

40Vmax



Long sash nozzle, Round brush, Filter bag, Main filter H set, Filter bag set, Battery, Charger Z: Battery and Charger are sold separately

DVC150LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner

Powered by AC and Two 18V Li-Ion Batteries in Series

353

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water: 15 / 12 L
Max Air Flow	AC / DC: 3.6 / 2.1 m ³ /min
Max Sealed Suction	AC / DC: 24 / 9 kPa
Suction Power	AC / DC: 320 / 25 - 70 W
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	75 dB(A)
Dimensions (L x W x H)	366x334x421 mm (14-3/8"x13-1/8"x16-1/2")
Net weight	8.9 - 9.6 kg (19.7 - 21.1 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC860LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner

8L Large dust bag capacity enables continuous cleaning work

353

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water: 8 / 6 L
Continuous Use (min.)	With BL1850B x 2: 65
Max Air Flow	AC / DC: 3.6 / 2.1 m ³ /min
Max Sealed Suction	AC / DC: 24 / 9 kPa
Suction Power	AC / DC: 320 / 25 - 70 W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	8.6 kg (19.0 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery and Charger are sold separately

DVC867LZX4 (Dry) Cordless Vacuum Cleaner

18V X2 (36V) LXT BL AWS Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Dry only)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust / Water: 8 / - L
Max Air Flow	2.4 m ³ /min
Max Sealed Suction	11 kPa
Suction Power	110 W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	7.7 - 8.4 kg (17.2 - 18.5 lbs.)

18V x2



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

DVC560PG2 / Z Cordless Upright Cleaner

18V X2 (36V) LXT BL Brushless Cordless 5 L HEPA Upright Cleaner

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity	Dust: 5 L
Continuous Use (min.)	w/BL1860B x2 Max / Normal / Low Noise: 30 / 60 / 120
Max Air Flow	1.9 m ³ /min
Max Sealed Suction	12 kPa
Suction Power	Max / Normal / Low Noise: 85 / 50 / 25 W
Cleaning Width	318 mm
Brushroll Rotation Speed	Max / Normal / Low Noise: 3,500 / 2,500 / 1,000 RPM
Dimensions (L x W x H)	326 x 318 x 1,146 mm (12-7/8 x 12-1/2 x 45")
Net weight	8.3 - 9.0 kg (18.3 - 19.8 lbs.)

18V x2



Long Sash Nozzle, Round Brush, Filter Bag, Filter H, Filter Bag Set, Z: Battery and Charger are sold separately

VC011GZ Cordless Backpack Vacuum Cleaner

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	2.4 m ³ /min
Max Sealed Suction	20 kPa
Continuous use (approx.) on a full battery charge	w/ BL4050F x2: 260 / 130 / 75 / 40 min
Suction Power	Mode 1/2/3/4: 25W / 55W / 100W / 195W w/ BL4040 x2: 301 x 185 x 526 mm (11-7/8 x 7-1/4 x 20-3/4")
Dimensions (L x W x H)	
Net weight	6.4 - 9.5 kg (14.1 - 20.9 lbs.)

40Vmax



Hose, Hose band, Dust bag, Switching nozzle, Bent pipe with pipe locking mechanism, Long sash nozzle, Battery, Charger, Z: Battery and Charger are sold separately

VC008GZ04 Cordless Backpack Vacuum Cleaner

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Max Air Flow	2.4 m ³ /min
Max Sealed Suction	18 kPa
Suction Power	w/ Hose 32-1.0 (Max): 180 W
Dimensions (L x W x H)	233 x 151 x 376 mm (9-1/8 x 5-15/16 x 14-3/4")
Net weight	4.3 - 4.7 kg (9.5 - 10.4 lbs.)

40Vmax



Floor Nozzle, Hose, Hose Band, Nozzle, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Battery, Charger, Z: Battery and Charger are sold separately



DVC660ZX7 Cordless Backpack Vacuum Cleaner

18V X2 (36V) LXT BL Brushless HEPA Cordless Backpack Vacuum Cleaner

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	w/ Hose complete 32-1.0: 2.2 m ³ /min w/ Hose Complete 28-1.0: 2.0 m ³ /min
Suction Power	Max / High / Normal w/ Hose 32-1.0: 95 / 50 / 25 W Max / High / Normal w/ Hose 28-1.0: 90 / 45 / 25 W Operation w/o Load: 2.5 m/s ² or less
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	297x174x523 mm (11-3/4"x6-7/8"x20-5/8")
Net weight	6.1 - 6.7 kg (13.4 - 14.8 lbs.)

18V x2



Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger, Z: Battery and Charger are sold separately

DCL184Z Cordless Cleaner

18V LXT Li-Ion Cordless 3-Speed Cleaner

Li-ion Ah 8.0 5.0 3.0 1.5



Capacity	Cloth / Paper Dust Bag: 500 / 330 mL
Continuous Use (min.)	Max / High / Normal: 33 / 50 / 133
Max Air Flow	Cleaning: 1.4 m ³ /min Blowing: 0.8 m ³ /min
Max Air Velocity	Blowing: 7.2 m/s
Max Sealed Suction (water column)	5.4 kPa (550 mmH ₂ O)
Noise Level	Max / High / Normal: 68 / 65 / 58 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 365x138x202 mm (14-3/8"x5-7/16"x8")
Net weight	1.8 - 2.2 kg (4.0 - 4.9 lbs.)

18V



Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately



VC014GLZ Cordless Vacuum Cleaner New

Cordless 7.5 L Dust Class L HEPA Portable Vacuum Cleaner (Wet & Dry)

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	Dry / Wet: 7.5 / 4.5 L
Continuous Use (min.)	w/ BL4050F: 22 - 120 min.
Air volume	1.0 - 2.0 m ³ /min
Max Sealed Suction	4.5 - 15 kPa
Suction Power	25 - 165 W
Dimensions (L x W x H)	400 x 251 x 282 mm (15-3/4 x 9-7/8 x 11-1/8")
Net weight	5.0 - 6.2 kg (11.0 - 13.7 lbs.)

40Vmax



Hose complete, Wide nozzle, Sash nozzle, Shoulder belt, Paper filter, Paper filter set, Wet filter, Battery, Charger, Z: Battery and Charger are sold separately

DVC750LZX1 Cordless Portable Vacuum Cleaner

Compact, portable and easy-to-use

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust / Water: 7.5 / 4.5 L
Continuous Use (min.)	w/ BL1850B (High): 30 w/ BL1850B (Normal): 60
Max Air Flow	1.3 m ³ /min
Max Sealed Suction	6.7 / 4.2 kPa
Suction Power	High / Low: 50 / 25 W
Dimensions (L x W x H)	418x251x278 mm (16-1/2"x9-7/8"x11")
Net weight	4.3 - 4.6 kg (9.4 - 10.1 lbs.)

18V



Hose, Floor Nozzle, Sash Nozzle, Z: Battery and Charger are sold separately

Powerful vacuuming for faster, more efficient cleaning

Suction power capable of lifting three 500ml bottles



* The image is intended to convey suction force. Do not attempt to lift objects.

Powered by 40Vmax XGT Li-Ion battery



BL MOTOR

Continuous run time (approx.) on a full battery charge


Maximum Minimum
22 - 120 min.
[Battery: BL4050F]

High-power vacuuming

High power achieved by increased motor size and rotation speed from the predecessor model

Low noise level

Low noise levels have been achieved by supporting the motor assembly with rubber components to suppress vibrations.



*1 Measured with a hose, according to JISC9108 *2 According to EN60335-2-69 *3 Maximum suction power with the suction force adjusting knob



Tank capacity
Wet
4.5 L



Tank capacity
Dry
7.5 L



Photo: VC014GL

VC3210L Vacuum Cleaner (Wet & Dry)

Complying with dust class L

173 mm

110V

VC3210L/B



Continuous Rating Input	1,050W
Max Peak Air Ow	2.0m ³ / min
Max Sealed Suction	22.0 kPa
(Water Column)	(2,240 mmH ₂ O)
Tank Capacity	Dust: 32 L
	Water: 27 L
Dimensions	552x398x685mm
(L x W x H)	(21-3/4"x15-5/8"x27")
Net Weight	14.5kg (32.0lbs)
Power Supply Cord	5.0m (16.4ft)



Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Poly Bag Set

VC2510L Vacuum Cleaner (Wet & Dry)

Complying with dust class L

173 mm



Continuous Rating Input	1,050W
Max Peak Air Ow	2.0m ³ / min
Max Sealed Suction	22.0 kPa
(Water Column)	(2,240 mmH ₂ O)
Tank Capacity	Dust: 25 L
	Water: 14 L
Dimensions	432x416x451mm
(L x W x H)	(17"x16-3/8"x17-3/4")
Net Weight	10.5kg (23.2lbs)
Power Supply Cord	5.0m (16.4ft)



Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Plastic Dust Bag Set

VC2000L Vacuum Cleaner (Wet & Dry)

Wet & Dry L-class Vacuum Cleaner



Continuous rating Input	1,000W
Max. peak air flow	216 m ³ / h
Max. sealed suction	21 kPa
Tank capacity	Dust: 20L
	Water: 13L
Dimensions	375x 385 x 505mm
(L x W x H)	(14-7/6"x 15-1/5" x 19-8/8")
Net Weight	7.5kg (16.5lbs)
Power supply cord	5.0m (16.4ft)



Filter Bag - Fleece, Disposal Bag - Plastic, Suction Hose, Suction Tube, Hand tube, Floor Nozzle, Nozzle Universal, Crevice Nozzle

CL001GD115 / GZ04 / GZ12 Cordless Cleaner

40Vmax XGT BL Brushless Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 5.0 4.0 2.5 2.0



Capacity	730 mL
Continuous Use (min.)	w/ BL4040, 1 / 2 / 3 / 4: 128 / 64 / 40 / 25
Max Air Flow	1.2 m ³ /min
Max Sealed Suction	21 kPa
(water column)	(2,100 mmH ₂ O)
Suction Power	w/ Easy Shake Off Filter, 1 / 2 / 3 / 4: 20 / 45 / 70 / 125 W
Dimensions (L x W x H)	w/ BL4020 / BL4025: 1,066 x 113 x 152 mm w/ BL4040: 1,081 x 113 x 152 mm
Net weight	1.7 - 2.3 kg (3.5 - 5.1 lbs.)



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Battery, Charger, Z: Battery and Charger are sold separately

CL003GZ09 / GZ14 Cordless Cleaner

40Vmax XGT BL Brushless Cordless Cleaner

Li-ion Ah 5.0 4.0 2.5 2.0



Capacity	250 mL
Continuous use	w/ BL4025, Mode 1 / 2 / 3 / 4: 80 / 40 / 25 / 16 min
Max air flow	1.0 m ³ /min
Max sealed suction	20 kPa (2,000 mmH ₂ O)
Suction power	w/ Easy shake off filter EX, Mode 1 / 2 / 3 / 4: 15 / 35 / 60 / 100 W
Noise level	Mode 1 / 2 / 3 / 4: 54 / 59 / 62 / 65 dB(A)
Dimensions (L x W x H)	w/ Pipe & Nozzle, w/ BL4040: 1,121 x 113 x 177 mm (44-1/4 x 4-7/16 x 7")
Net weight	1.9 - 2.5 kg (4.2 - 5.5 lbs.)

40Vmax **1**

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Z: Battery and Charger are sold separately

CL004GZ Cordless Cleaner

New

4-Speed Cleaner with LED Light, Cyclone System, Electric Rotary Brush

Li-ion Ah 5.0 4.0 2.5 2.0



Capacity	250 mL (8.5 oz)
Continuous use	w/ BL4025, Mode 1 / 2 / 3 / 4: 60 / 40 / 20 / 14 min
Max air flow	1.0 m ³ /min
Max sealed suction	20 kPa (2,000 mmH ₂ O)
Suction power	w/ Easy shake off filter, Mode 1 / 2 / 3 / 4: 20 / 40 / 70 / 110 W
Noise level	Mode 1 / 2 / 3 / 4: 54 / 59 / 62 / 65 dB(A)
Dimensions (L x W x H)	w/ Pipe & Nozzle, w/ BL4025: 1,094 x 243 x 186 mm (43 x 9-9/16 x 7-3/8")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

40Vmax **1**

Nozzle assembly, Pipe assembly, Sash nozzle, Nozzle holder, Easy shake off filter, Battery, Charger, Motorized brush nozzle, Z: Battery and Charger are sold separately

Enhances carpet cleaning efficiency with an electric rotary brush

Equipped with an electric rotary brush, the cleaner offers enhanced debris removal performance and maneuverability for cleaning carpets.

Continuous use on a full battery charge

Mode	4	3	2	1
	14 min.	20 min.	40 min.	60 min.

Battery: BL4025

High power & Low noise

Ergonomic handle design
Designed for easy pushing, offering smooth operation and minimizing fatigue.



Quiet operation
Sound-absorbing sponges are placed along the exhaust route to reduce exhaust noise.


Reduced noise in the cyclone section

The pre filter and sponge filter reduce wind noise from the mesh pipe.


- Mesh Pipe
- Sponge Filter
- Pre-filter

Highly durable professional-grade nozzle

The nozzle is equipped with a highly durable motor suitable for professional cleaning tasks and a highly durable brush with three types of bristles for efficient debris removal.



With the driving force of the electric rotary brush, the cleaner can be pushed with ease.



Dust capacity **250 mL**

Floor detection function

The electric rotary brush stops when the nozzle is not in contact with the floor and is driven when the nozzle touches the floor.

The electric rotary brush can be attached and detached without tools, making maintenance easy.



Photo: CL004G



Dust box (Cyclone type)
The dust box can be removed for emptying while keeping the cyclone unit attached to the cleaner body.



Hook
The hook is convenient for propping up during cleaning.



Easy to clean connection parts

Low noise [Mode 4] **66 dB(A)**

Max sealed suction **20 kPa**

Max air flow **1.0 m³/min**

DCL286FRTB / FZB Cordless Cleaner

18V LXT BL Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 6.0 5.0 3.0 1.5



Dust collecting type	Cyclone
Capacity	250 mL
Max Air Flow	1.0 m ³ /min
Max Sealed Suction	18 kPa
Suction power	w/ High performance filter, Mode 1/2/3/4: 15W/35W/60W/100W
Dimensions (L x W x H)	543 x 113 x 177 mm (21-3/8 x 4-7/16 x 7")
Net weight	1.6 - 1.9 kg (3.5 - 4.2 lbs.)

18V **1**

Nozzle assembly, Straight pipe, Sash nozzle, Nozzle holder, Battery, Charger, Z: Battery and Charger are sold separately

DCL283FRTB / FZB Cordless Cleaner

18V LXT BL Cordless Cleaner with LED Light

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	730 mL
Max Air Flow	1.1 m ³ /min
Max Sealed Suction	17.5 kPa
Suction power	w/ Easy shake off filter: 90 W
Dimensions (L x W x H)	503 x 113 x 154 mm (19-3/4 x 4-7/16 x 6-1/8")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V **1**

Nozzle assembly, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, Z: Battery and Charger are sold separately

DCL284FRTB / FZB Cordless Cleaner

18V LXT BL Cordless 4-Speed Cleaner with LED Light

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	730 mL
Max Air Flow	1.2 m ³ /min
Max Sealed Suction	18 kPa
Suction power	w/ Easy shake off filter, Mode 1/2/3/4: 20W/ 45W/ 70W/ 125W
Dimensions (L x W x H)	503 x 113 x 153 mm (19-3/4 x 4-7/16 x 6-1/16")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

18V

Nozzle assembly, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, Z: Battery and Charger are sold separately

DCL180ZB Cordless Cleaner

Optimum cordless cleaner for constructors or factory

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	650 mL
Continuous Use (min.)	with BL1830B: 20
Max Air Flow	1.4 m ³ /min
Max Sealed Suction (water column)	4.2 kPa (428 mmH ₂ O)
Dimensions (L x W x H)	999x114x152 mm (39-1/4"x4-1/2"x6")
Net weight	1.2 kg (2.7 lbs)

18V

Nozzle Assembly, Sash Nozzle, Pipe, Filter (Factory-mounted), Pre-filter (Factory-mounted), Z: Battery and Charger are sold separately

CL200FDSA / FDZ Cordless Cleaner

New

Vmax CXT Li-Ion Cordless 3-Speed Cleaner with LED Light

Li-ion Ah 5.0 4.0 2.0 1.5



Capacity	250 mL (8.5 oz)
Continuous Use (min.)	with BL1016: Max / High / Normal: 45 / 25 / 10 W
Max Air Flow	0.8 m ³ /min
Max Sealed Suction (water column)	14.0 kPa (N/A mmH ₂ O)
Dimensions (L x W x H)	1,031 x 90 x 151 mm (40-1/2 x 3-1/2 x 5-15/16")
Net weight	1.1 kg (2.4 lbs.)

12Vmax

Nozzle assembly, Sash nozzle, Nozzle holder, Pipe, High performance filter, Battery, Charger, DZ: Battery and Charger are sold separately

CL106FDSA / FDZ Cordless Cleaner

12Vmax CXT Li-Ion Cordless Cleaner

Li-ion Ah 5.0 4.0 2.0 1.5



Capacity	600 mL
Continuous Use (min.)	with BL1041B: 42
Max Air Flow	1.3 m ³ /min
Max Sealed Suction (water column)	3.1 kPa (316 mmH ₂ O)
Dimensions (L x W x H)	958x100x150 mm (37-3/4"x3-15/16"x5-7/8")
Net weight	1 - 1.1 kg (2.1 - 2.5 lbs.)

12Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Filter, Prefilter, DZ: Battery and Charger are sold separately

CL108FDSA Cordless Cleaner

Lightweight and High Power

Li-ion Ah 5.0 4.0 2.0 1.5



Capacity	600 mL
Continuous Use (min.)	with BL1016B: Max / High / Normal: 10 / 12 / 25
Max Air Flow	1.2 m ³ /min
Max Sealed Suction (water column)	4.4 kPa (445mmH ₂ O)
Dimensions (L x W x H)	956x110x150 mm (37-5/8"x4-5/16"x5-7/8")
Net weight	1.0 - 1.2kg (2.3 - 2.7 lbs.)

12Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter, Battery, Charger, DZ: Battery and Charger are sold separately

CL117FDX2 Cordless Cleaner

12Vmax Li-Ion Cordless 3-Speed Cleaner with LED Light, Built-In Battery

Li-ion Ah 2.0



Dust collecting type	Capsule
Capacity	650 mL
Continuous Use (min.)	Powerful / High / Normal: 10 / 18 / 55
Max air flow	1.0 m ³ /min
Max sealed suction	5.0 kPa (510 mmH ₂ O)
Suction Power	Powerful / High / Normal: 29 / 15 / 3 w/o Pipe & Nozzle: 457 x 110 x 136 mm (18 x 4-5/16 x 5-3/8")
Dimensions (L x W x H)	
Net weight	1.0 kg (2.2 lbs.)

12Vmax Built-in

Floor/Carpet T-nozzle, Sash nozzle, Sash nozzle holder, Straight pipe, Charger (country-specific), Easy Shake Off Filter

CL100DW Cordless Cleaner

Lightweight but with strong suction power (14W)

Li-ion Ah 1.3



Capacity	600 mL
Continuous Use (min.)	12
Max Air Flow	1.2m ³ /min
Max Sealed Suction (water column)	2.3kPa (235 mmH ₂ O)
Dimensions (L x W x H)	966 x 103 x 150mm (38-1/32"x4-1/16"x5-7/8")
Net weight	0.88kg (1.94lbs)

10.8V

Battery Charger, Battery Cartridge, Nozzle Assembly, Sash Nozzle, Pipe, Filter (factory-mounted), Pre-filter (factory-mounted), DZ: Battery and Charger are sold separately

DVC350Z Cordless Vacuum Cleaner

Limited Qty

Cordless design for high portability

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Flow	1.4 m ³ /min
Max Sealed Suction (water column)	6.0 kPa (612 mmH ₂ O)
Recoverable capacity	Dust: 3.0 L (0.8 gal)
Dimensions (L x W x H)	273x195x226 mm (10-3/4"x7-5/8"x8-7/8")
Net weight	2.2 - 2.4 kg (4.8 - 5.3 lbs)

18V

Nozzle Assembly, Dust Bag Assembly, Hose Complete, Shoulder Belt, Z: Battery and Charger are sold separately

Capsule type



One touch switch



CL001G **40Vmax**

Easy shake off dust filter

Max Air Flow **1.2m³/min** Max Sealed Suction **21 kPa**

DCL284F **18V**

Easy shake off dust filter

Max Air Flow **1.2m³/min** Max Sealed Suction **18 kPa**

CL108FD **12Vmax**

Max Air Flow **1.2m³/min** Max Sealed Suction **4.4 kPa**

Capsule type



Trigger switch



DCL283F **18V**

Easy shake off dust filter

Lock on button

Max Air Flow **1.1m³/min** Max Sealed Suction **17.5 kPa**

DCL180 **18V**

Easy shake off dust filter

Max Air Flow **1.4m³/min** Max Sealed Suction **4.2 kPa**

CL106FD **12Vmax**

Max Air Flow **1.3m³/min** Max Sealed Suction **3.1 kPa**

Cyclone unit



One touch switch



CL004G **40Vmax**

High performance filter set

Electric rotary brush

Max Air Flow **1.0m³/min** Max Sealed Suction **20 kPa**

CL003G **40Vmax**

High performance filter set

Max Air Flow **1.0m³/min** Max Sealed Suction **20 kPa**

DCL286F **18V**

High performance filter set

Max Air Flow **1.0m³/min** Max Sealed Suction **18 kPa**

Cyclone unit



One touch switch



CL200FD **12Vmax**

High performance filter set

Max Air Flow **0.8m³/min** Max Sealed Suction **14 kPa**

Cyclone attachment



Cyclone pre-separation system separates dust from air.

Easy disposal of the fine dust collected in dust case.

The main unit of the cleaner requires much less frequent dust disposal.

with front sleeve 28mm Tip attachments 32mm Tip attachments







For Cleaning



*for Model DVC261, DVC265, DVC660, DVC665, VC008G, VC009G, VC011G, VC012G only















Color


<p>Model VC006GM DVC156L VC007GL DVC860L VC001GL DVC861L VC003GL DVC865L VC005GL DVC866L DVC155L</p> 	<p>Model VC3211H VC3211M VC2211M VC3210L VC2510L VC1310L</p>  	<p>Model VC008G VC011G DVC261 DVC660 DVC350</p>  
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Hose 38mm with front sleeve (front cuffs 32A) 1.5m 199388-4</p> 	<p>Hose 32mm with front sleeve 1.0m*199453-9 1.7m 199493-7</p> 	<p>Hose 28mm 1.0m 195433-3 *143787-2 5.0m 195436-7 1.5m 152992-0 5.0m A-34229 2.5m 195437-5</p> 
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Bending pipe assembly with pipe lock without sleeve 140G26-3 (front cuffs 32A)</p> 	<p>Bending pipe assembly with pipe lock with sleeve 127093-3</p> 	<p>Bending pipe assembly without sleeve 458184-2 (front cuffs 32A)</p> 	<p>Bending pipe assembly with sleeve 126756-8</p> 	<p>Bending pipe & Telescopic pipe set without sleeve Aluminum pipe 191B15-1 Plastic pipe 191G89-2</p> 	<p>Front cuffs 22 195547-8</p> 
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------

<p>Cyclone attachment set with pipe lock * ○ 191D71-3 ● 191D73-9</p> 	<p>Cyclone attachment set* ○ 199491-1 ● 191D75-5</p> 
------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------

<p>Straight pipe with pipe lock Aluminum Telescopic pipe 28L (L=590-942mm) 140G19-0 Bending pipe assembly with pipe lock (140G26-3) set 191B15-1</p> 	<p>Straight pipe Plastic Telescopic pipe 28 (L=500-850mm) 123584-2</p> 	<p>Aluminum Telescopic pipe (L=591-43mm) 191X62-4</p> 	<p>Aluminum straight pipe 32 (L=465mm) 199843-6</p> 	<p>Tapered nozzle set 192236-6</p> 	
<p>Plastic Telescopic pipe 28L (L=590-950mm) 127605-2</p> 	<p>Plastic straight pipe 28 (L=465mm) 451424-7 ○ 451241-5 ● 451244-9 ● 456587-4</p> 	<p>for others vacuum cleaner nozzles 32mm (1-1/4")</p>	<p>for others vacuum cleaner nozzles 32mm (1-1/4")</p>	<p>F/C switching t-nozzle 32 1912F9-8</p> 	<p>Rotary brush nozzle set 32 1914Y7-7*1</p> 
<p>Plastic straight pipe 28L with pipe lock (L=479mm) ○ 459353-8 ● 458942-6</p> 	<p>Plastic straight pipe 28L with pipe lock (L=340mm) for Cyclone attachment set ○ 191D76-3 ● 191D77-1</p> 	<p>Plastic straight pipe 28 (L=320mm) for Cyclone attachment set ○ 191D79-7 ● 191D80-2</p> 	<p>for others vacuum cleaner nozzles 32mm (1-1/4")</p>	<p>F/C switching t-nozzle 32 1912F9-8</p> 	<p>Rotary brush nozzle set 32 1914Y7-7*1</p> 

<p>28mm Tip attachments Rotary brush nozzle set 28 Carpet 1914Y6-9</p> 	<p>F/C switching t-nozzle 28 Flooring & carpet ○ 198183-9</p> 	<p>Seat nozzle 120 set For automobile seat 140H95-0</p> 	<p>Round brush ○ 198878-4 ● 198553-2 ● 198555-8</p> 
<p>Carpet nozzle 28 1911J6-6</p> 	<p>Nozzle assembly Floor t-nozzle 28 ○ 123485-4 ○ 123486-2 ● 123488-8 ● 123539-7</p> 	<p>Mat nozzle 120 For automobile floor 459056-4</p> 	<p>Shelf brush ○ 198873-4 ● 198538-8 ● 198540-1</p> 
<p>Nozzle assembly Flat type 199454-7</p> 	<p>Floor/carpet t-nozzle For rug / carpet ○ 198525-7 / 198528-1 ○ 198527-3 ● 198526-5 / 198529-9</p> 	<p>Brush nozzle set 191M30-1</p> 	<p>Soft brush 360 complete set 140H94-2</p> 
<p>F/C switching t-nozzle 28 Flooring & carpet 191G86-8</p> 	<p>Nozzle assembly For rug / carpet 122291-4</p> 	<p>Sash nozzle ○ 416041-0 ○ 451240-7 / 413770-6 ○ 451243-1 ● 456586-6 / 413809-5</p> 	<p>Angle attachment set 1914A7-9</p> 
<p>Nozzle assembly Floor t-nozzle 28 ○ 127825-8 ● 127827-4 ● 127828-2</p> 	<p>Seat nozzle 28 For automobile seat ○ 199038-1 ● 199041-2 ● 199039-9</p> 	<p>Long sash nozzle 330 ○ 198919-6 ● 198990-0 ● 198992-6 ● 191D65-8</p> 	<p>Rubber nozzle 330 set * 422437-5</p> 
<p>Nozzle assembly Floor/carpet t-nozzle 28 ○ 191X06-4</p> 	<p>Crevice nozzle 415 199439-3</p> 	<p>Flexible rubber nozzle 28 * 197900-4 / 197901-2</p> 	<p>* These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.</p>



Model VC006GM VC007GL VC001GL VC003GL VC005GL DVC155L DVC156L DVC860L DVC861L DVC865L DVC866L		Model VC3211H VC3211M VC2211M VC3210L VC2510L VC1310L		Model VC008G VC011G DVC261 DVC660 DVC350	
---------------------------------------------------------------------------------------------------------------------------------------	--	--------------------------------------------------------------------------------	--	--------------------------------------------------------------------	--

Cleaning set

- Hose complete 38-2.5
- Straight pipe
- Bending pipe
- Nozzle assembly
- Corner nozzle

195439-1

Hose 38mm

- 1.5m 198757-6
- 2.5m 195434-1
- 5.0m 195435-9

Bending pipe assembly 38

1912G5-3

Bent pipe 192562-3

Straight pipe 192563-1

Aluminum Telescopic pipe 38

L=606-958mm
1912G4-5

38mm Tip attachments

Nozzle assembly Flat type (Dry) 199455-5		Universal type (Dry/ Wet) 195551-7		Wide Type (Wet model only) A-47846	
F/C switching t-nozzle 38 Flooring & carpet (Dry) 191G87-6		Compact type A (Dry) 195549-4		Round brush (Dry) 191657-9	
F/C switching t-nozzle Flooring & carpet (Dry) 198184-7 / 198533-8		Compact type B (Wet model only) 195550-9		Corner nozzle (Dry) 410306-2	

Model
 VC3012L
 VC4210L
 VC3012M
 VC4210M

Model
 VC2012L
 VC2512L
 VC3011L

Model
 DCL184
 CL121D

Hose 32mm

4m
P-84084

Hose 32mm

3.5m
P-81739

Flexible rubber nozzle 28

197900-4 / 197901-2

Extension tubes

ø35x520mm black 2 pcs
P-72942

28mm Tip attachments

Blower nozzle complete

140J64-3

Floor nozzle
 D36x260
 (Dry/ Wet)
 W107402706

Floor nozzle
 Universal Type(Wet)
 W000014295

Corner nozzle
 ø35x200
 Use with P-81745
 W000029541



for Dust (Powder)

- Powder Filter Set
- Damper set
- Pre-filter set
- Dust paper filter or Poly bag set

for Wet & Dry

- Cloth filter or Water filter (Water only)

Compatible with usual Poly bags or Paper filters, allowing for:




- Quick and easy dust disposal
- Lower-running cost compared with paper dust bag




	VC006GM (Wet & Dry)	VC003GL (Wet & Dry)	VC004GL (Dry)	DVC155L, DVC865L, DVC860L (Wet & Dry)	VC3210L, VC2510L (Wet & Dry)	VC1310L (Wet & Dry)	
Use as a set	Powder filter set Dry only	1911B6-0 *1911B7-8	*191V70-3	*191V70-3	*197166-6	195441-4 *191F82-0	195438-3
	Damper set	1911B4-4	191V68-0	191V68-0	195552-5	195552-5	195552-5
	Pre-filter set	1911B5-2	191V69-8	191V69-8	195553-3	195612-3	195553-3
Cloth filter Wet & Dry		144625-1	144625-1	140248-3			
Water filter Wet only It is recommended using water filter when picking up large amount of water repeatedly.	1910N0-0	191V67-2		195555-9 DVC155L, DVC865L, DVC860L only	VC3210L: 195611-5 VC2510L: 195556-7	195555-9	
Dust paper filter 7L (5pcs) for dry powder				A-49541		A-49541	
Filter bag set 10L/15L/25L/35L (5pcs) for dry dust	35L: 1910Y4-9	10L: 1912R3-4 VC001GL, VC002GL, VC005GL, DVC860L, DVC861, DVC865L, DVC866L, DVC867L 15L: 195557-5 VC003GL, VC004GL, DVC155L, DVC156L, DVC157L			25L: 195558-3 VC3210L only 15L: 195557-5 VC2510L only	15L: 195557-5	
Poly bag set (10pcs)	1910R3-2	195432-5	195432-5	195432-5	195440-6	195432-5	

To use powder filter, remove the float cage and float by removing the bolts.



Capacity up tank set
DVC860L, DVC861L, DVC865L, DVC866L, DVC867L

* "HEPA filter" Mark on tank



Color

With electric rotary brush

CL004G

With pipe lock Model

CL001G	CL117FD
CL002G	CL108FD
CL003G	CL100D
DCL283F	
DCL284F	
DCL286F	

Model

DCL180	CL108FD
DCL181F	CL100D
DCL182	
CL183D	
CL106D	
CL107FD	

Model

CL070D
CL072D

Cyclone attachment set with pipe lock

○ 191D71-3
● 191D73-9

Dust capsule conv, kit Cyclone unit set

Compatible model:
CL001G, *CL003G, DCL283F, DCL284F,
*DCL286F, DCL180, CL181F
(*Standard Equipment)

○ 1910D3-4
● 1910D5-0

Cyclone attachment set

○ 199491-1
● 191D75-5

*Included sensomatic

Flexible hose set

○ 191496-7
○ 198867-9 / 198868-7
● 198541-9 / 198545-1
● 198542-7
● 198870-0
● 198547-7

Pipe assembly set
For Nozzle assembly set with electric rotary brush

○ 1915P4-6

Straight pipe with pipe lock

○ 191D76-3

Straight pipe

○ 191D79-7

Flexible hose set

191E30-3

Straight pipe

Plastic Telescopic pipe 28 (L=500-850mm)

○ 198560-5

Plastic straight pipe 28 (L=465mm)

○ 451424-7
○ 451241-5
● 451244-9
● 451425-5
● 456587-4

Plastic straight pipe 28 (L=320mm) for Cyclone attachment set

○ 191D79-7
● 191D80-2

Straight pipe with pipe lock

Plastic telescopic pipe 28L with pipe lock (L=479-719mm)
Compatible model: CL001G, CL002G, CL003G, DCL283F, DCL284F, DCL285F, DCL286F
○ 1910Y3-1

Plastic straight pipe 28L with pipe lock (L=479mm)
● 458942-6

Plastic straight pipe 28L with pipe lock (L=340mm) for Cyclone attachment set

○ 191D76-3
● 191D77-1

28mm Tip attachments

Nozzle assembly set
With electric rotary brush CL004G only

○ 1915P8-8

Brush complete set (replacement brush)
1915P6-2

Nozzle assembly
Floor t-nozzle 28

○ 127825-8
● 127827-4
● 127828-2

Nozzle assembly
Floor/carpet

○ 191X06-4

Nozzle assembly
Floor t-nozzle 28

○ 123485-4
○ 123486-2
● 123488-8
● 123843-4
● 123539-7

Floor/carpet t-nozzle
For rug / carpet

○ 198525-7 / 198528-1
● 198882-3
● 198527-3
● 198526-5 / 198529-9

Nozzle assembly
For rug / carpet

122291-4

Seat nozzle 28
For automobile

○ 199038-1
● 199040-4 / 199041-2
● 198921-9 / 199039-9

Brush nozzle set

191M30-1

Seat nozzle 120 set
For automobile

140H95-0

Mat nozzle 120
For automobile

459056-4

Sash nozzle

○ 416041-0
○ 451240-7 / 413770-6
● 451243-1 / 413859-0
● 416225-0
● 457228-5
● 456586-6
● 413809-5

Long sash nozzle 330

○ 198919-6
● 198990-0
● 198992-6
● 191D65-8

Crevice nozzle 415

199439-3

Angle attachment set

191A47-9

Round brush

○ 198878-4
○ 198553-2
● 198554-0
● 198881-5
● 198555-8
● 191D67-4

Shelf brush

○ 198873-4
● 198538-8
● 198539-6
● 198876-8
● 198540-1

Soft brush 360 complete set

140H94-2

Sash nozzle holder 28
For Plastic straight pipe

Model:
CL001G, CL002G, CL003G, DCL283F, DCL284F, DCL285F, DCL286F, CL114FD, CL117FD

○ 459354-6

Others Model

○ 451242-3
● 451245-7
● 456585-8

Plastic straight pipe
Sash nozzle holder 28
Sash nozzle

Rubber nozzle 330 set

*422437-5

*These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.

Holder set Part No. 199971-7


Model: CL001G, CL002G, DCL283F, DCL284F, DCL285F, DCL180, DCL180F, DCL181F, DCL182, DCL182F, CL114FD, CL107FD, CL072D

Cleaner stand set Part No. 1911L1-0

For holding Makita cordless cleaner in an upright position.

Model: CL001G, CL002G, CL003G, CL004G, CL070D, CL100D, CL102D, CL106FD, CL107FD, CL108FD, CL111D, CL114FD, CL117FD, CL183D, DCL180, DCL181F, DCL182, DCL283F, DCL284F, DCL285F, DCL286F

Capsule type cleaner Model: CL001G, DCL283F, DCL284F, DCL181F, DCL180F, DCL180, CL183D, CL108FD, CL106FD, CL070D

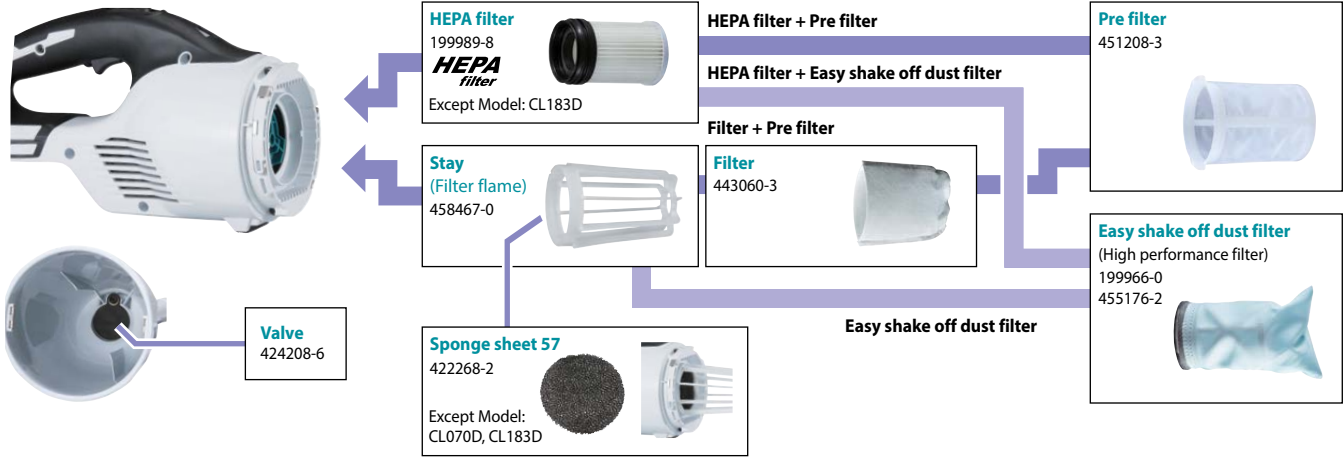

HEPA filter
199989-8
HEPA filter
Except Model: CL183D

HEPA filter + Pre filter

HEPA filter + Easy shake off dust filter

Filter + Pre filter

Filter
443060-3

Pre filter
451208-3

Easy shake off dust filter
(High performance filter)
199966-0
455176-2


Stay (Filter flame)
458467-0

Sponge sheet 57
422268-2
Except Model: CL070D, CL183D

Easy shake off dust filter

Valve
424208-6

Paper bag type cleaner Model: CL002G, DCL182, DCL182F, CL114FD, CL121D, CL107FD, CL072D, DCL184, CL121D

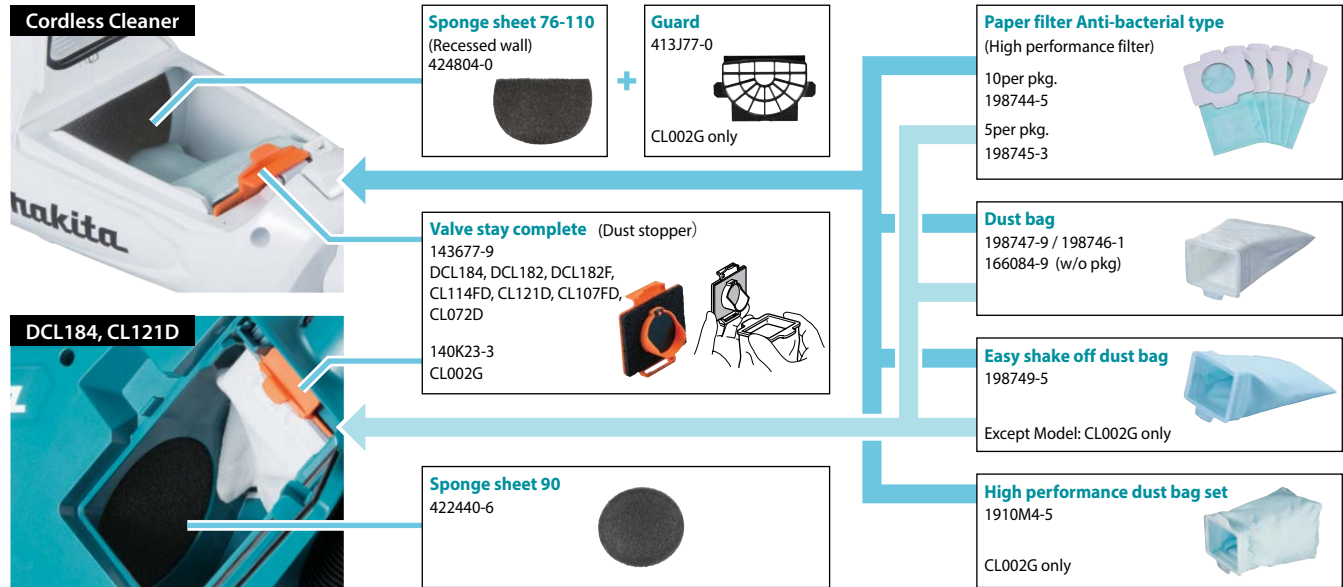

Cordless Cleaner

Sponge sheet 76-110
(Recessed wall)
424804-0

Guard
413J77-0
CL002G only

Paper filter Anti-bacterial type
(High performance filter)
10per pkg.
198744-5
5per pkg.
198745-3

Valve stay complete (Dust stopper)
143677-9
DCL184, DCL182, DCL182F,
CL114FD, CL121D, CL107FD,
CL072D
140K23-3
CL002G

Dust bag
198747-9 / 198746-1
166084-9 (w/o pkg)


Easy shake off dust bag
198749-5
Except Model: CL002G only

High performance dust bag set
1910M4-5
CL002G only

DCL184, CL121D

Sponge sheet 90
422440-6

New cyclone unit Model: CL001G, CL003G, DCL283F, DCL284F, DCL286F, DCL180, DCL181F

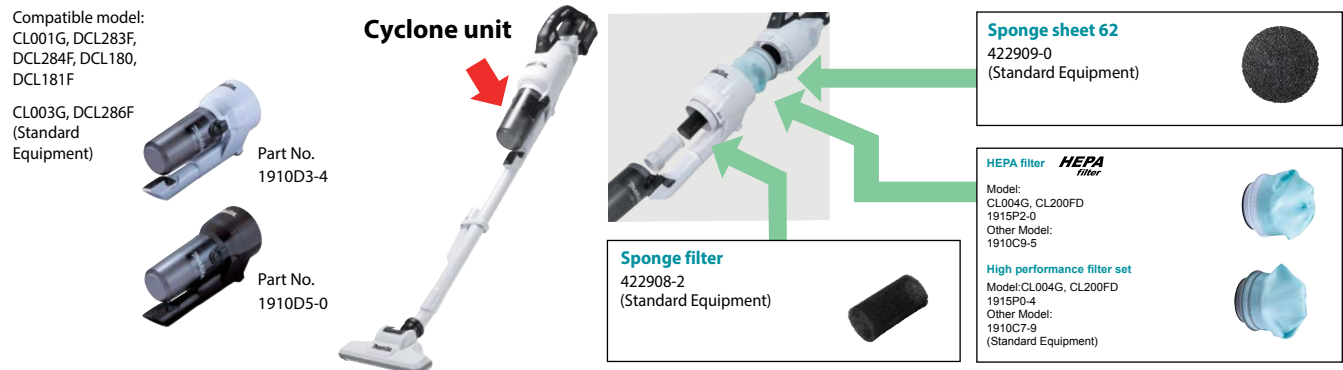

Compatible model:
CL001G, DCL283F,
DCL284F, DCL180,
DCL181F

CL003G, DCL286F
(Standard
Equipment)

Cyclone unit

Part No. 1910D3-4

Part No. 1910D5-0

Sponge sheet 62
422909-0
(Standard Equipment)

HEPA filter **HEPA filter**
Model: CL004G, CL200FD
1915P2-0
Other Model:
1910C9-5

High performance filter set
Model: CL004G, CL200FD
1915P0-4
Other Model:
1910C7-9
(Standard Equipment)


Sponge filter
422908-2
(Standard Equipment)

Cleaner carrying bag

Cleaner body, battery, charger and accessories can be stored together.




Except Model: CL003G, CL004G, DCL286F, DCL184, CL121D
(LxWxH: 600x210x190mm)
Part No. 199901-8



Model: DCL184, CL121D
(LxWxH: 490x210x230mm)
Part No. 199900-0
with shoulder belt: Part No. 162544-9

Blue dust capsule

Transparent blue dust capsule. You can see the accumulated dust.

Model: DCL280F, DCL281F
Part No. 136106-9



Cordless Upright Cleaner Model: DVC560, VC010G

Color

28mm Tip attachments

Seat nozzle 28

For automobile

- 199038-1
- 199041-2
- 199040-4
- 199039-9
- 198921-9



Long sash nozzle 330

- 191D65-8
- 198919-6
- 198990-0
- 198992-6



Seat nozzle 120 set

For automobile
140H95-0



Crevice nozzle 415

199439-3



Round brush

- 191D67-4
- 198878-4
- 198553-2
- 198555-8



Mat nozzle 120

For automobile
459056-4



Brush nozzle set

191M30-1



Shelf brush

- 198873-4
- 198538-8
- 198540-1



Sash nozzle

- 416041-0
- 451240-7 / 413770-6
- 413859-0
- 456586-6 / 413809-5



Soft brush 360 complete set

140H94-2



Grip assembly set

Dusts can be thrown away by removing
Dust case of Cyclone attachment.

1912B1-6



Filter bag set

10pcs. set
191T96-3



Dust bag set

191Y86-6



Main filter h set

191E39-5



Brush complete set

1910T8-6
1914B1-8



Cordless Portable Vacuum Cleaner Model: DVC750L, VC013GL, VC014GL

For Cleaning & Dust Collecting

Hose Complete

28-2.0m with Front cuffs 38
140G04-3

28-1-5m with Front cuffs 22, 24, 38
1915G6-9

38-1-5m with Front cuffs 38
191Y12-5



38mm Tip attachments



Front cuffs

Front cuffs 38

195545-2

Front cuffs 22

195547-8

Front cuffs 24

195546-0

Joint 38

For Front cuffs 38

418500-0

For Dust Collecting



28mm Tip attachments



Caster Set

1915G5-1
VC013GL, VC014GL



Filter bag set

10per pkg.
1915T3-6
VC013GL only



Paper filter bag set

10per pkg.
1915W5-3
VC013GL,
VC014GL only





Poly bag set

10per pkg.
195432-5



Dry only



Wet only



Filter complete (HEPA filter)

Dry
162518-0



Pre filter and Damper set

Dry only 199827-4

Damper
422449-8

Pre filter
162635-6



Shoulder Belt Set

162523-7



Wet filter set

191M39-3



Backpack Vacuum Cleaner Model: VC008G, VC011G, VC012G, VC009G, DVC660, DVC665, DVC261, DVC265

VC011G, VC012G, DVC660, DVC665

Dust bag assembly
191C30-1
191Y84-0
(VC012G, DVC660, DVC665)

Filter bag set (Paper dust bag)
10per pkg.
191C26-2

Main filter H set
(HEPA filter)
191D12-9
HEPA filter

VC008G, VC009G, DVC261, DVC265

Dust bag assembly
197898-5

Filter bag set (Paper dust bag)
10per pkg.
197902-0
197903-8

Filter set assembly **HEPA filter**
(HEPA filter)
191Y27-2 (VC008G, VC009G)
127725-2 (DVC261, DVC265)

Harness cover set

Washable harness cover made of a mesh material for improved breathability

VC008G, VC009G, VC011G, VC012G, DVC261, DVC265

191Y14-1



Protection cover set

When using Backpack vacuum cleaner in tight spaces etc., Protection cover is very helpful to prevent the scratches on surrounding objects caused by hitting cleaner.

DVC261, DVC265

191054-7

VC008G, VC009G

1911W4-1



Robotic Cleaner Model: DRC200, DRC300

DRC200

Side brushes
SH00000065 (Standard)

Power brush
SH00000063 (Standard)

Filter
SH00000213

Boundary line tape
(15m roll)
SH00000231

Turn brush cover
SH00000064

DRC300

Side brush assembly set
191P26-0 (Soft) for tatami mats, etc.
191P28-6 (Standard)

Main brush complete set
191P20-2 (Soft) for tatami mats, etc.
191P22-8 (Standard)

Bottom plate assembly set
191P24-4

Magnet tape set
191P18-9
5m long,
with double-sided tape

Filter H complete set
191P31-7
HEPA filter

Sponge sheet set
191X35-7
Sponge part to be attached to Bumper for protection of surrounding objects from damage

Cordless Polisher Scrubber Model: PS001G

Brush 190

Brush bristle type: Soft

Application: For cleaning wooden floors, decks, etc.

1914T0-6



Brush bristle type: Medium

Application: For cleaning general interior floors.

1914T1-4



Brush bristle type: Hard

Application: For cleaning exterior concrete floors and removing grease stains from kitchens and similar areas.

1914T2-2








Brush bristle type: Hard (with abrasive)

Application: For cleaning porcelain tiles and similar surfaces.

1914T3-0



Floor pad

	Cleaning ability*2	Cleaning surface	Application
Color*1: White 1914S5-9 	↑	↑	For surface polishing of resin wax.
Color*1: Red 1914S6-7 			
Color*1: Blue 1914S7-5 			↓
Color*1: Brown 1914S8-3 	For removing resin wax.		
Color*1: Black 1914S9-1 			

*1 The brighter and lighter the color, the finer the grit; the darker and deeper the color, the coarser the grit (industry standard).


*2 Stain and wax removal power



Pad holder 175 set

Pad holder for Floor pad 200 (used with Floor pad 200)
Attachment portion for the floor pad: hook and loop fastener

1914S4-1



Various pads can be attached to the hook-and-loop side.

Accessory bag set

An accessory bag made of water-resistant materials for carrying wet accessories. Capable of storing all accessories for this model.

1915D1-8



Cordless Vacuum Sweeper Model: VS001G

Multi adapter set

- MAKPAC (all types) can be installed, which is also convenient for storing cleaning accessories.
- Portable power pack PDC01 /1200 /1500 can be installed to improve run time.

1913F5-2



Dust bag set

- Capacity: 47L (12.4 gal)
- Dust bag suitable for collecting waste such as fallen leaves.
- Dust bag can be reused.

1913F7-8



Main filter H set

191D12-9



28mm Hose



Length (m)	Hose type	Front cuffs	Included Items	Part No.
1.0	Antistatic hose	without cuffs	---	143787-2
1.5	Antistatic hose	Front cuffs 38	---	152992-0
2.5	Antistatic hose	Front cuffs 22	Front cuffs 38 Front cuffs 24	195437-5
3.5	Antistatic hose	Front cuffs 38	Front cuffs 22 Front cuffs 24	195433-3

Hose 38mm



Length (m)	Hose type	Front cuffs	Part No.
1.5	Antistatic hose	Front cuffs 38	198757-6
2.5	Antistatic hose	Front cuffs 38	195434-1

Front Cuffs for 28mm hose or joint

Type	Hose Side	Cuff Type	Part No.
Front cuffs 22	28mm hose w/o cuffs	cuffs 22	195547-8
Front cuffs 38	28mm hose w/o cuffs	cuffs 38	195545-2
Front cuffs 24	Cuffs 22 or Cuffs 38	cuffs 24	195546-0
Joint 25 set	Cuffs 24	cuffs 22	192349-3
Rubber sleeve 18-21	Cuffs 22	For 18-21mm pipe	192202-3

Joint 38mm hose

Type	Hose Side	Nozzle side	Part No.
Front cuffs 24	Cuffs 22 or Cuffs 38	Cuffs 24	195546-0
Joint 22-38	Cuffs 38	Cuffs 22	195548-6
Joint 38	Cuffs 38	Nozzle 28	418500-0
Joint 25 set	Cuffs 38	70mm pipe with O-ring	181575-9

Hose band




Hose Size	Part No.
28/32/38	166116-2

28mm Bending pipe



Matching hose set / Matching cuffs	Matching pipe	Part No.
28mm hose w/o cuffs	28L	127093-3
	28	126756-8

Straight pipe 28L & 28




Joint type	Part No.	Third party vacuum cleaner nozzles
C38	191M79-1	Proteam Side Winder
B35	191M78-3	KARCHER Nilfisk
A32	191M77-5	PACVAC SHOPVAC Proteam


Nozzle assembly for vacuum & blow



Model	Size (mm)	Part No.
DUB182, DVC350	220	132025-7
UB100D, UB101D, DUB185, DUB186 UB1102, UB1103	220	123245-4
	430	123246-2

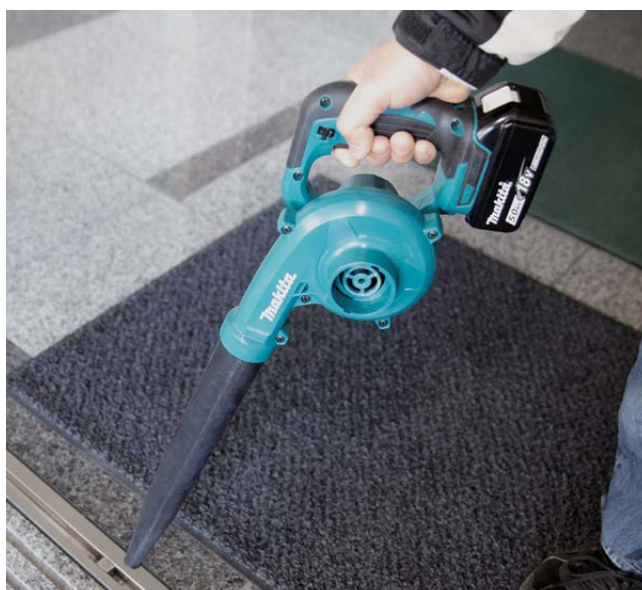

Aluminum pipe 38



Item	Description	Material	Part No.
1	Bending pipe	Aluminum	192562-3
3	Stopper + Screw M4 x 20	---	413R35-4

32mm Hose B type



Model No.	Size	Length (m)	Part No.
VC2012L, VC2512L, VC3011L	32B	3.5	P-81739

Tool adaptor



Model No.	Description	Part No.
VC3012L/M, VC4210L/M VC2012L, VC2512L, VC3011L	Joint 25-50	192349-3

Filter & bag

Model No.	Description	Per pkg.	Part No.
VC2000L	Fleece filter bag (Filter bag)	5	P-72899
	Pre Disposal bag	5	P-70297
	PET Filtecent	1	P-70219

Dust bag



Model	Part No.
DUB182, UB1100, UB1101	122321-1
DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	123241-2
DUB187	GB00000185
DUB363	191P40-6

Flexible hose set



Model	Part No.
DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	191M34-3

Wiper nozzle set (for blowing away)



Model	Part No.
DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	191M32-7

Brush nozzle set



Model	Part No.
DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	191M30-1



For DCL501




Model	Type	Part No.
Hose	-	SH00000034
Straight pipe	Adjustable length	SH00000060
Nozzle assembly	Flooring & carpet	SH00000058
Crevice nozzle	-	SH00000042



OUTDOOR POWER EQUIPMENT


A wide variety of Lithium-ion Garden Tools

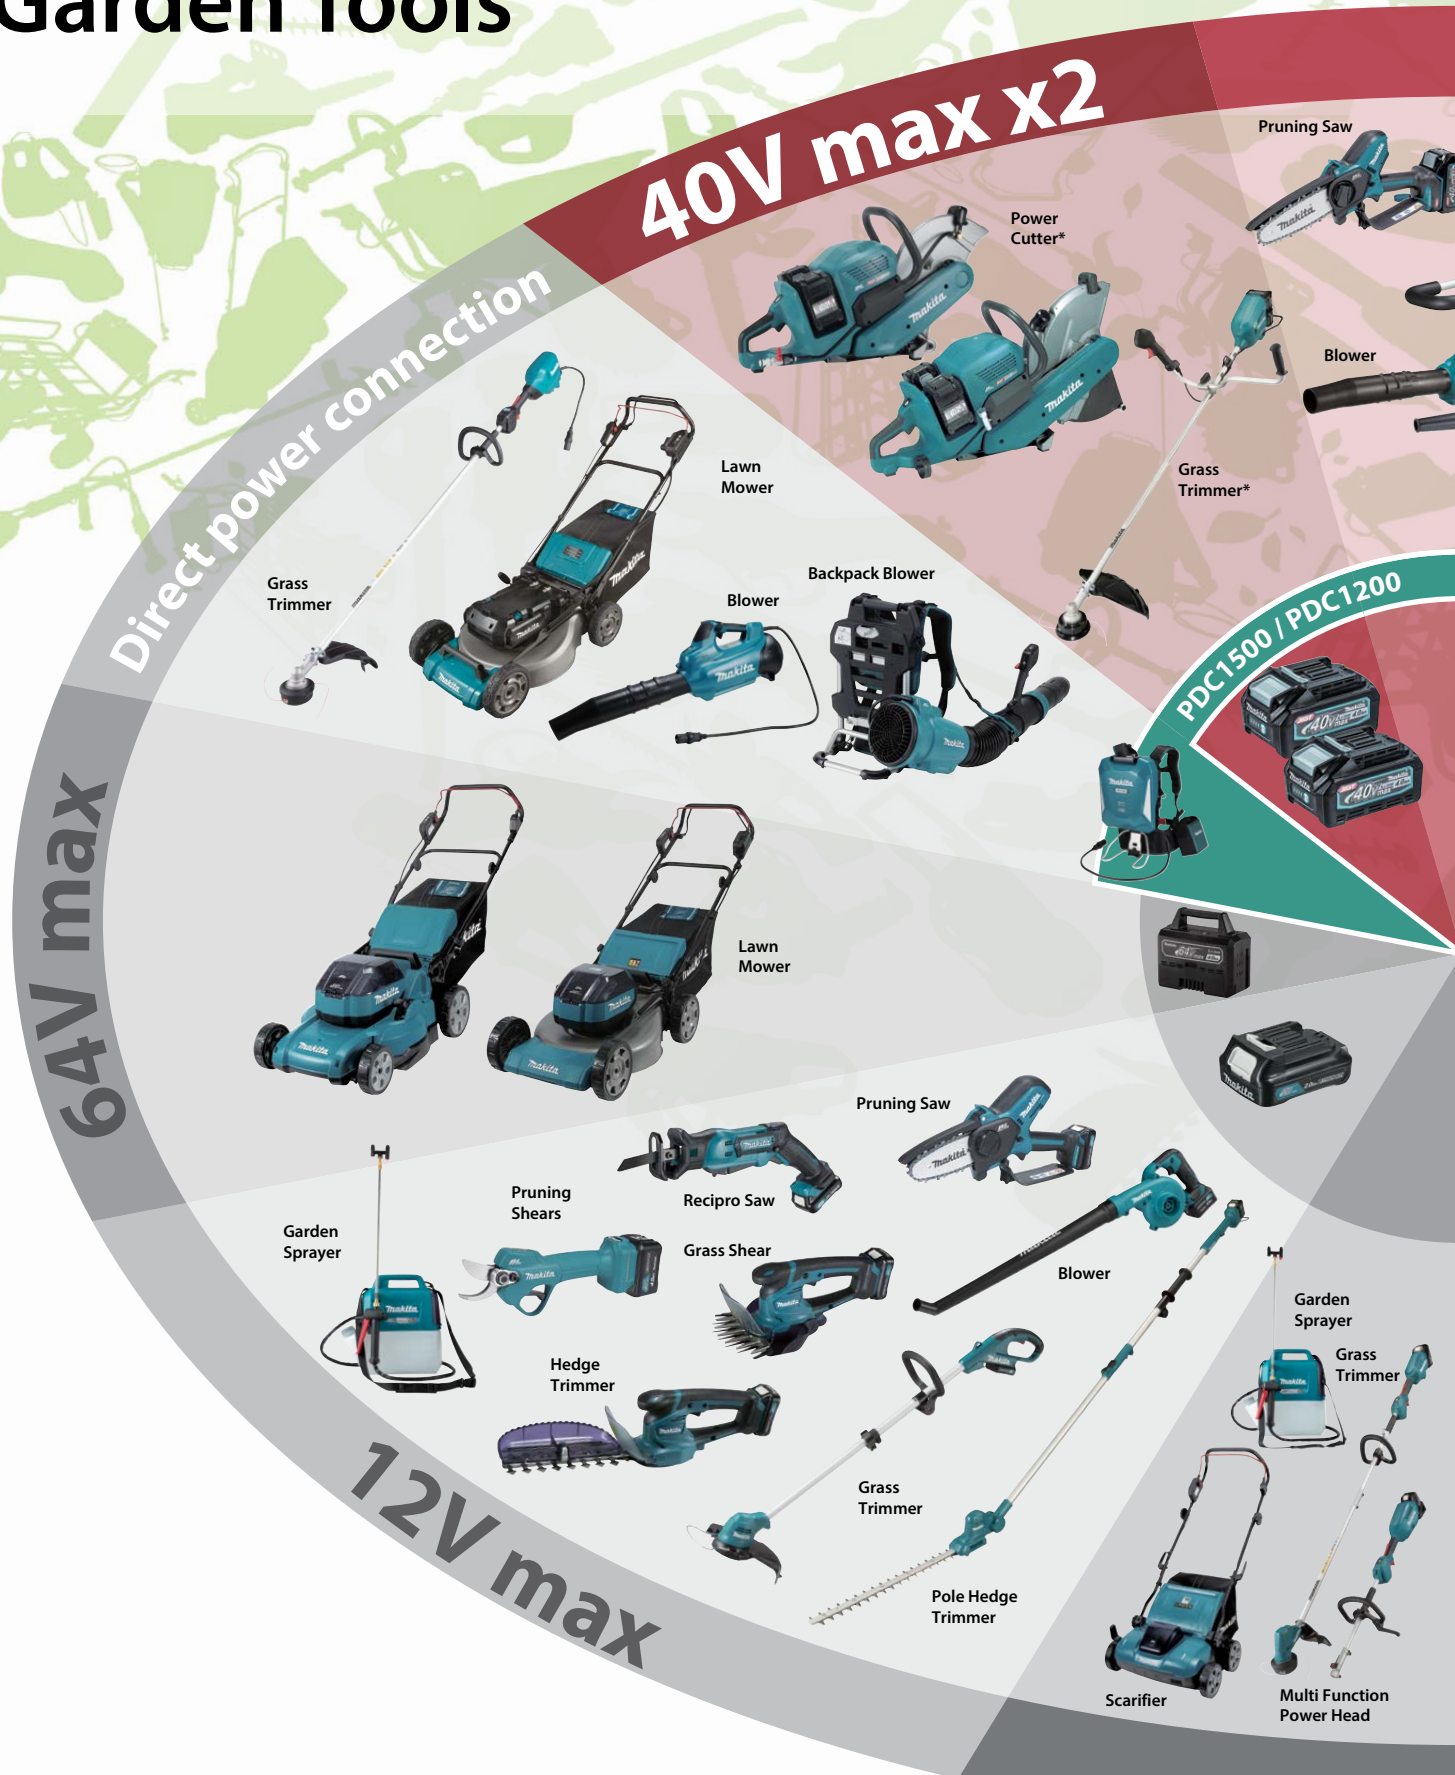

* These models are not compatible with Portable Power Pack (PDC1500, PDC1200)
 Only 18Vx2 rear handle type chainsaws are compatible

**These models are not compatible with Portable Power pack (PDC1500)

40V max

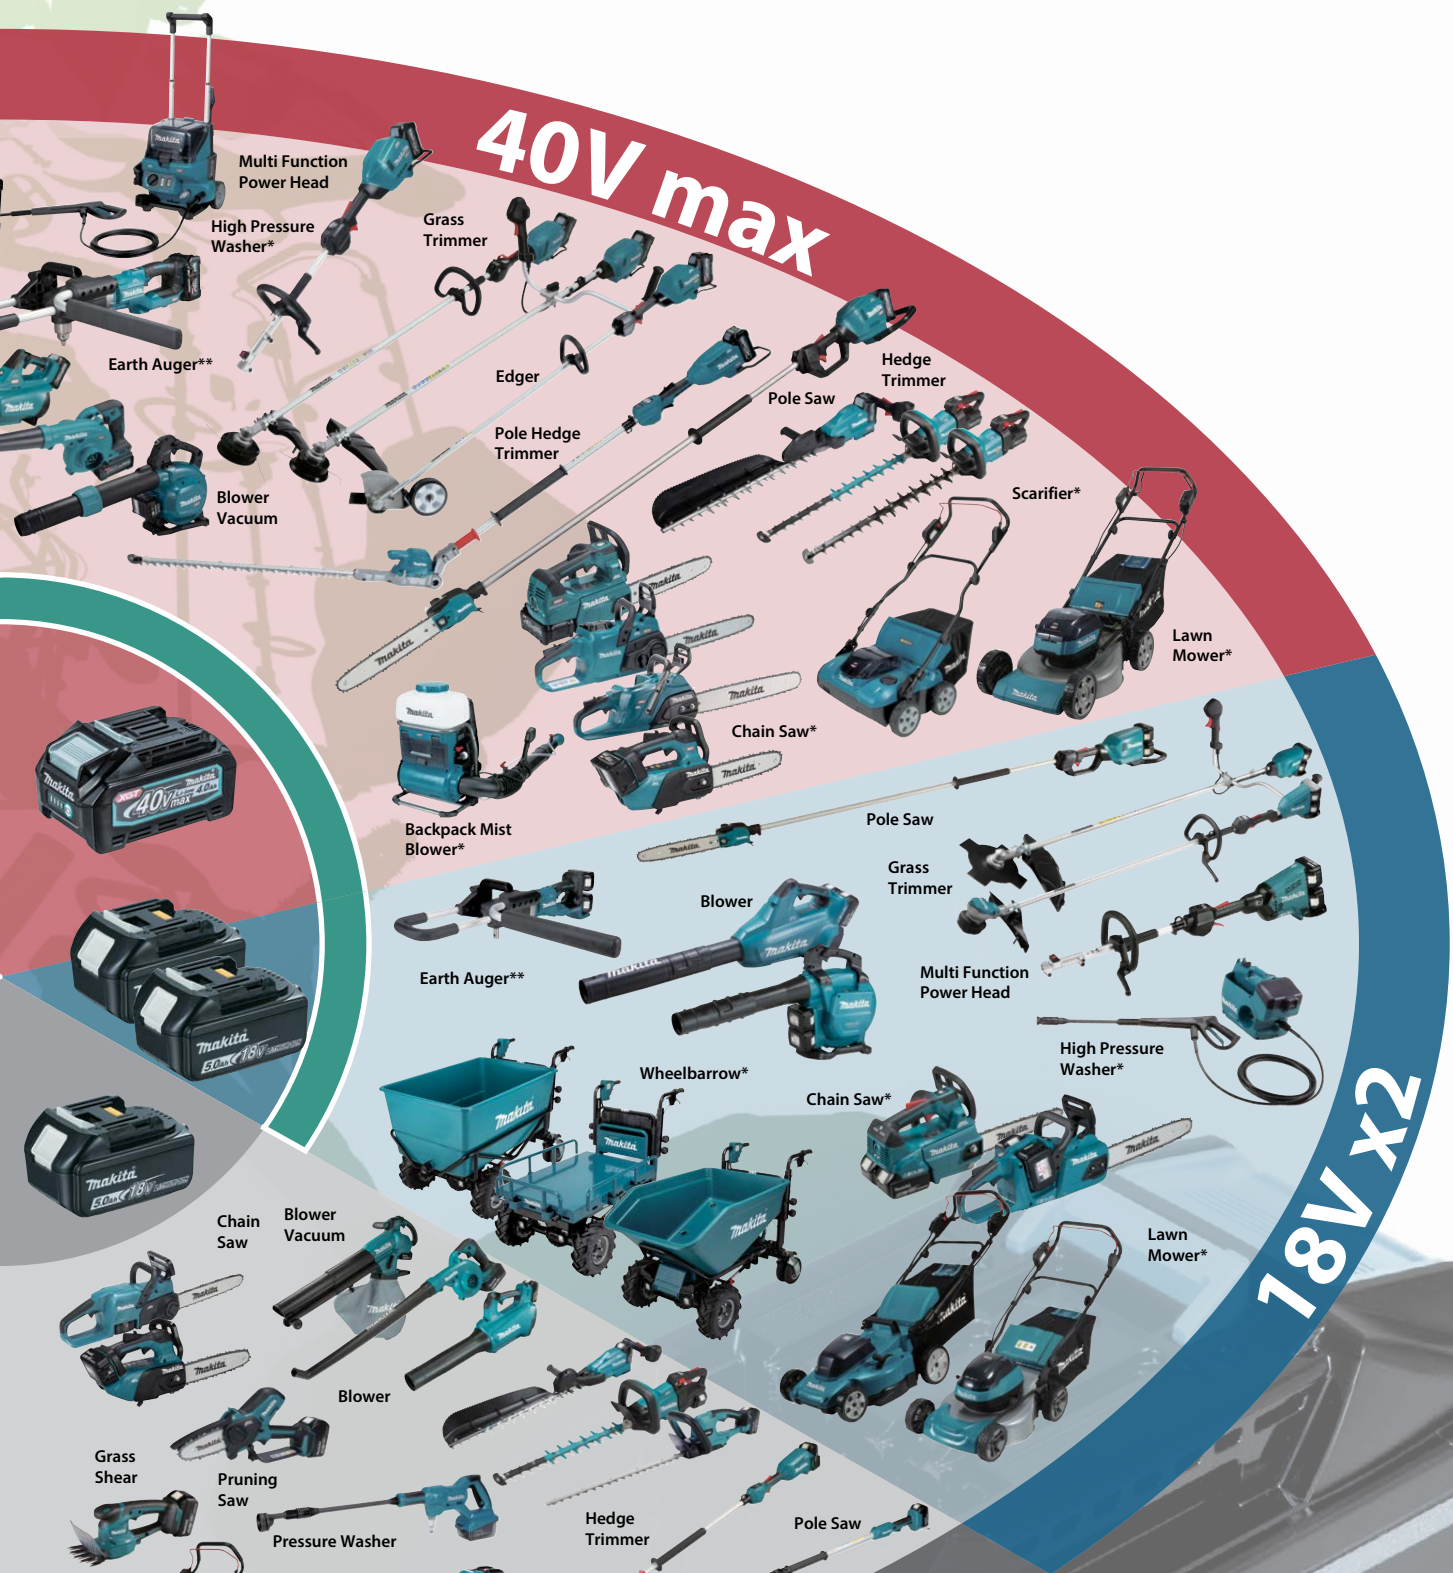

Multi Function Power Head

High Pressure Washer*

Grass Trimmer

Earth Auger**

Blower Vacuum

Edger

Pole Hedge Trimmer

Pole Saw

Hedge Trimmer

Scarifier*

Lawn Mower*

Chain Saw*

Backpack Mist Blower*

Pole Saw

Blower

Grass Trimmer

Earth Auger**

Multi Function Power Head

High Pressure Washer*

Wheelbarrow*

Chain Saw*

Lawn Mower*

Chain Saw

Blower Vacuum

Blower

Grass Shear

Pruning Saw

Pressure Washer

Hedge Trimmer

Pole Saw

Lawn Mower

Pruning Shears

Recipro Saw

18V

18V x2



Portable Power Pack



1,500Wh-class high capacity

Portable Power Pack PDC1500

More robust appearance and increased strength

Provides a comfortable backpacking experience, due to the harness structure that allows the battery to fit closely to the user's back.



Quick removal/attachment



Reflectors



4-LED fuel gauge



Charger DC4001

Part No. 191L01-2
Charging time
PDC1500: 450 min.
PDC1200: 360 min.

Compatible with a wide range of applications

(both in backpack and stationary styles)



PDC01

Powered by up to four 18V LXT batteries

432 Wh high capacity

(with 4 pcs. of BL1860B)
(Batteries sold separately)

IPX4



PDC1500



PDC1200



PDC1500A01 Portable Power Pack

1,500Wh-class High Capacity, High Output Power



Capacity	43.55 Ah
Energy capacity	1,567.8 Wh
Number of cells	130
Charging time	450 min.
Dimensions (L x W x H)	w/o Harness: 369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8")
Net weight	10.9 - 12.9 kg (24.0 - 28.4 lbs.)*
Power supply cord	Battery side: 1.2 m (3.9 ft) Adapter side: 0.6 m (2.0 ft)

40Vmax 18V x2

Harness, Charger. *not covered by EPTA-Procedure

PDC1200A01 / A02 Portable Power Pack

1,200 Wh high capacity



Capacity	33.5 Ah
Energy Capacity	1,206 Wh
Number of Cells	100
Charging Time (hours)	6
Power Supply Cord	Battery Side: 1.1 m (3.6 ft) Adapter Side: 0.6 m (2.0 ft)
Dimensions (L x W x H)	w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")
Net weight	8.8 kg (19.4 lbs.)

40Vmax 18V x2

Harness, Charger. *PDC1200A01 (1x 18V+18V Adaptor)

PDC01 (191A67-6) Portable Power Pack

Powered by up to four 18V LXT batteries

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	24 / 12 Ah
Energy Capacity	432 Wh
Dimensions (L x W x H)	400x195x132mm (15-3/4"x7-5/8"x5-3/16")
Net weight	1.7 kg (5.6 lbs.)

18V x2 18V

Harness, Adapter. *191A67-6 (18V + 18V Adaptor only)



UB003GZ Cordless Blower

New

Maximum air volume is 13.8 m³/min for blowing and 13.0 m³/min for vacuuming

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Blower function
 Max blowing force: 7 / 16N
 Max air volume: 9.4 / 13.8 m³/min
 Max air velocity: 0 - 46 / 68 m/s

Vacuum function
 Max air volume: 13.0 m³/min
 Max suction power: 280 W
 Max sealed suction: 3.3 kPa
 699 - 830 x 201 x 400 mm
 (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")

Dimensions (L x W x H)
 Net weight 5.0 - 6.1 kg (11.0 - 13.4 lbs.)

40Vmax



Flat nozzle, Vacuum kit, Band assembly, Hex wrench, Battery, Charger, Z: Battery and Charger are sold separately

UB001GZ Cordless Blower

Powerful blowing force (Max 17N)

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Max Air Volume 15.8 m³/min (554 CFM)
Max Air Velocity 62 m/s (140 MPH)
No Load Speed (RPM) 0 - 23,000
Dimensions (L x W x H) 850 - 950 x 167 x 297 mm
 (33-1/2 - 37-1/2 x 6-9/16 x 11-3/4")
Net weight 3.1 - 3.9 kg (6.8 - 8.6 lbs.)

40Vmax



Shoulder Belt, End Nozzle, Flat Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

Blowing

Max air volume	Max air velocity
13.8 m ³ /min	68 m/s
	56 m/s (Average)

Vacuuming

Max air volume	Max sealed suction
13.0 m ³ /min	3.3 kPa

Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About 45 min	About 30 min
High mode	About 15 min	About 9 min

Vacuum Dust bag capacity **50L**

Blower Telescopic pipe with lock ring

Stepless adjustment within a 130 mm range

BL MOTOR

Motor interlock restricts startup unless the pipes are properly secured.

One-touch locking lever For attaching and detaching the blower pipe and elbow pipe.

Photo: UB003G

Sub-handle improves control during sideways operation.

One-touch locking lever For attaching and detaching the suction pipe.

Mulching blades finely shred leaves during vacuuming, reducing volume and emptying frequency.

Before vacuuming **After vacuuming**

Air volume is adjustable from gentle to strong.

Cruise control lever reduces finger fatigue during continuous use.

Mode switch button provides tactile feedback for quick switching.

Triggers operation is also available.

Low mode High mode Clear click feedback

UB003CZ Battery Powered Blower

Powerful blowing force (Max 24N)



Max Air Volume w/ End nozzle, w/ PDC1500, Max speed mode: 17.6 m³/min
Max Air Velocity w/ End nozzle, w/ PDC1500, Max speed mode: 86.0 m/s
Avg. Air Velocity w/ End nozzle, w/ PDC1500, Max speed mode: 11.7 - 71.9 m/s
Blowing Force w/ End nozzle, w/ PDC1500, Max speed mode: 0.7 - 24 N
No Load Speed (RPM) Mode1 / Mode2 / Mode3: 4,000-10,600 / 17,700 / 22,100 min⁻¹
Dimensions (L x W x H) w/ Nozzle: 913 - 1,013 x 178 x 298 mm
Net weight 2.8 - 3.1 kg (6.2 - 6.8 lbs.)



End nozzle, Band assembly

UB001CZ Battery Powered Blower

Powerful blowing force (Max 20N)



Max Air Volume Cruise Control Mode: 0 - 15.0 m³/min
 Boost Mode: 17.6 m³/min
Max Air Velocity Cruise Control Mode: 0 - 60 m/s
 Boost Mode: 70
Avg. Air Velocity Cruise Control Mode: 0 - 50 m/s
 Boost Mode: 58
Blowing Force Cruise Control Mode: 0 - 15.0
 Boost Mode: 20.0
No Load Speed (RPM) Cruise Control Mode: 0 - 21,000
 Boost Mode: 24,000
Dimensions (L x W x H) 960 - 1,060 x 295 x 180 mm
Net weight 2.6 - 2.9 kg (5.7 - 6.5 lbs.)



Shoulder Belt, End Nozzle

UB002CZ01 Battery Powered Backpack Blower

BL Brushless Battery Powered Variable Speed Blower



Max Air Volume	w/ End nozzle: 0 - 19.0 m ³ /min w/ Flat nozzle: 0 - 17.9 m ³ /min
Max Air Velocity	w/ End nozzle: 0 - 71.7 m/s w/ Flat nozzle: 0 - 76.0 m/s
Blowing Force	0 - 22.0 N
No load speed (RPM)	0 - 22,000
Continuous run time on a full battery charge	78 min
Sound power level	95.5 dB(A)
Dimensions (L x W x H)	w/o Nozzle: 267 x 565 x 715 mm (10-1/2 x 22-1/4 x 28-1/8") w/ Nozzle: 1,368 x 694 x 715 mm (54 x 27-1/4 x 28-1/8")
Net Weight	15.9 - 16.1 kg (35.1 - 35.4 lbs.)

Adapter Pipe, Flat Nozzle, Extension Nozzle

UB004CZ Battery Powered Backpack Blower

BL Brushless Battery Powered Variable Speed Backpack Blower



Max Air Volume (w/PDC1500)	Cruise Control Mode: 1/2/3: 8.9/15.4/19.7 m ³ /min Boost Mode: 20.9 m ³ /min
Max Air Velocity (w/PDC1500)	Cruise Control Mode: 1/2/3: 34.9 / 60.0 / 76.3 m/s Boost Mode: 80.7 m/s
Blowing Force (w/PDC1500)	Cruise Control Mode: 1/2/3: 5 / 15 / 25 N Boost Mode: 28 N
No load speed (RPM)	Cruise Control Mode 1/2/3: 10,500/18,000/22,500 min ⁻¹ Boost Mode: 23,800 min ⁻¹
Continuous run time on a full battery charge	55-200 min
Dimensions (L x W x H)	w/o Nozzle: 470 x 590 x 590 mm
Net Weight	18.9 kg (41.7 lbs.)

End nozzle, Flat nozzle

DUB363ZV Cordless Blower

Able to use both in Blower and Vacuuming applications

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Volume	13.4 m ³ /min (473 CFM)
Max Air Velocity	65 m/s
No Load Speed (RPM)	0 - 7,850
Dimensions (L x W x H)	w/ 3-Stage Telescopic Long Nozzle: 737/786/836x200x415 mm (7-7/16"/31" / 33"x7-7/8"x16-3/8")
Net weight	4.3 - 6.6 kg (9.4 - 14.6 lbs.)

18V x2 Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

DUB362Z Cordless Blower

Brushless Cordless Variable 6-Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity (Ah)	5.0 / 6.0
Energy Capacity (Wh)	90x2 / 108x2
Max Air Volume	13.4 m ³ /min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
No Load Speed (RPM)	11,400 - 21,500
Sound Power Level	93.5 dB(A)
Dimensions (L x W x H)	830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8" x8-1/8"x11-5/8")
Net weight	3.5 kg (7.7 lbs)

18V x2 Fast charger, Battery cartridge, Nozzle, Shoulder belt, Z: Battery and Charger are sold separately



DUB184Z Cordless Blower

18V LXT BL Brushless Cordless Variable Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Volume	13.0 m ³ /min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
No Load Speed (RPM)	0 - 18,000
Continuous Use (min.)	w/ BL1860B: 12, w/ BL1850B: 10
Sound Pressure Level	86.6 dB(A)
Sound Power Level	93.5 dB(A)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 825x160x285mm (32-1/2"x 6-5/16"x11-1/4")
Net weight	2.5 - 3.0 kg (5.4 - 6.7 lbs.)

18V Shoulder Belt, Nozzle, Battery, Charger, Hex Wrench, Z: Battery and Charger are sold separately

DUB187Z Cordless Blower Vacuum

18V LXT BL Cordless Variable Speed Blower Vacuum

Li-ion Ah 6.0 5.0 3.0 1.5



No load speed (RPM)	9,000-13,500
Max air volume (Vacuum)	6.1 m ³ /min
Max sealed suction	3.3 kPa
Dust bag capacity	25 L
Max air volume	Blower: 4.2 m ³ /min Vacuum: 6.1 m ³ /min
Max air velocity	Blower: 64.0 m/s
Max sealed suction	Vacuum: 3.3 kPa
Dimensions (L x W x H)	1,168 x 164 x 416 mm (46 x 6-1/2 x 16-3/8")
Net weight	3.7 - 4.0 kg (8.2 - 8.8 lbs.)

18V Dust bag, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

DUB186Z Cordless Blower

18V LXT Cordless Variable 3-Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Volume	3.2 m ³ /min
Max Air Velocity	68 m/s
No Load Speed (RPM)	0 - 18,000
Blowing Force	2.5 N
Sound Power Level	92.4 dB(A)
Dimensions (L x W x H)	w/ BL1815N: 859x156x195 mm (33-3/4"x6-1/8"x7-5/8") w/ BL1830B / BL1850B / BL1860B: 861x156x210 mm (34"x6-1/8"x8-1/4")
Net weight	1.6 - 2.1 kg (3.5 - 4.6 lbs.)

18V Garden Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

UB101DZ Cordless Blower

12Vmax CXT Cordless Variable 3-Speed Blower

Li-ion Ah 5.0 4.0 2.0 1.5



Max Air Volume	2.6 m ³ /min
Max Air Velocity	56 m/s
Max Sealed Suction	N/A kPa
No Load Speed (RPM)	0 - 15,800
Blowing Force	1.6 N
Run Time (min)	w/ BL1016, High / Mid / Low: 7 / 20 / 45
Dimensions (L x W x H)	w/ BL1016/BL1021B: 849 x 155 x 184 mm (33-1/2 x 6-1/8 x 7-1/4") w/ BL1041B: 852 x 155 x 202 mm (33-1/2 x 6-1/8 x 8")
Net weight	1.4 - 1.9 kg (3.1 - 4.2 lbs.)

12Vmax



Garden Nozzle, Battery, Charger, DZ: Battery and Charger are sold separately

UB002GZ Cordless Blower

40Vmax XGT Cordless Variable 3-Speed Blower

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



No load speed	0 - 18,000 min ⁻¹
Blowing force	Blower: 3.1 - 3.2 N
Max air volume	Blower: 3.5 - 3.6 m ³ /min Vacuum: 2.0 m ³ /min
Max air velocity	Blower: 98 - 99 m/s
Max sealed suction	Vacuum: 5.4 kPa
Continuous use	Blower, High / Med. / Low: 20 / 60 / 120 min. Vacuum: 19 min.
Dimensions (L x W x H)	515 x 156 x 227 mm (20-1/4 x 6-1/8 x 8-15/16")
Net weight	2.0 - 3.5 kg (4.4 - 7.7 lbs.)

40Vmax



Nozzle, Dust bag, Battery, Charger, Z: Battery and Charger are sold separately

Compact and lightweight, easy to maneuver

The air volume has been enhanced by enlarging the suction inlet.

3-stage air volume settings by dial with variable speed control by trigger.



Max air volume
3.6 m³/min

Battery: BL4040F / without nozzle

Max air velocity
99 m/s

Battery: BL4040F / with standard nozzle

Continuous use

Blower High / Med. / Low:
20 / 60 / 120 min

Vacuum **19 min**

Battery: BL4025 on a full battery charge



For cleaning around job sites



Vacuum function



With the garden nozzle

For clearing pathways

photo: UB002G

DUB185Z Cordless Blower

18V LXT Cordless Variable 3-Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Volume	3.2 m ³ /min
Max Air Velocity	98 m/s
Max Sealed Suction	5.8 kPa
No Load Speed (RPM)	0 - 18,000
Blowing Force	3.1 N
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	w/ BL1815N: 515x156x195 mm (20-1/4"x6-1/8"x7-5/8") w/ BL1830B / BL1850B / BL1860B: 517x156x210 mm (20-3/8"x6-1/8"x8-1/4")
Net weight	1.6 - 2.1 kg (3.5 - 4.6 lbs.)

18V



Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

UB100DZ Cordless Blower

12Vmax CXT Cordless Variable 3-Speed Blower

Li-ion Ah 5.0 4.0 2.0 1.5



Max Air Volume	2.6 m ³ /min
Max Air Velocity	75 m/s
Max Sealed Suction	4.0 kPa
No Load Speed (RPM)	0 - 15,800
Blowing Force	1.8 N
Run Time (min)	w/ BL1016, High / Mid / Low: 8 / 20 / 45
Dimensions (L x W x H)	w/ BL1016/BL1021B: 505 x 155 x 184 mm (19-7/8 x 6-1/8 x 7-1/4") w/ BL1041B: 508 x 155 x 202 mm (20 x 6-1/8 x 8")
Net weight	1.4 - 1.9 kg (3.1 - 4.2 lbs.)

12Vmax



Nozzle, Battery, Charger, DZ: Battery and Charger are sold separately

UB1102 Blower

High output air volume

303 mm



Continuous Rating Input	600W
Air Volume	4.1 m ³ /min
Air Pressure	5.7 kPa
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	479x185x178 mm (18-7/8"x7-1/4"x7")
Net Weight	1.9 - 2.2 kg (4.3 - 4.8 lbs.)
Power Supply Cord	2.5 m (8.2 ft.)



Nozzle Assembly Front Cuffs 24, Poly Bag Set

UB1103 Blower

High output air volume

303 mm



Continuous Rating Input	600W
Air Volume	0-4.1 m ³ /min
Air Pressure	0-5.7 kPa
No Load Speed (RPM)	0-16,000
Dimensions (L x W x H)	479x185x178mm (18-7/8"x7-1/4"x7")
Net Weight	2.0kg (4.3lbs)
Power Supply Cord	2.5m (8.2ft)



Nozzle Assembly Front Cuffs 24, Poly Bag Set

UX01GZ Cordless Multi Function Power Head

High power BL motor enables to work under heavy load

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



No Load Speed (RPM) High: 0-9,700
Medium: 0-8,200
Low: 0-5,700
Dimensions (L x W x H) 1,027 x 320 x 209 mm
(40-1/2 x 12-5/8 x 8-1/4")
Net weight 4.1 - 4.7 kg (9.3 - 10.6 lbs.)

40Vmax **XGT BL AFT WC XPT** 1

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

DUX60Z Cordless Multi Function Power Head

Multi Function System

Li-ion **AN** 6.0 5.0 3.0 1.5



No Load Speed (RPM) High: 0-9,700
Medium: 0-8,200
Low: 0-5,700
Dimensions (L x W x H) 1,011 x 320 x 216 mm
(39-3/4 x 12-5/8 x 8-1/2")
Net weight 4.1 - 8.7 kg (8.9 - 19.2 lbs.)

18V x2 **LXT BL AFT XPT** 1

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately



DUX18Z Cordless Multi Function Power Head

Multi Function System

Li-ion **AN** 6.0 5.0 3.0 1.5



No Load Speed (RPM) High: 0-9,700
Low: 0-6,800
Dimensions (L x W x H) w/BL1830B / BL1850B / BL1860B: 977 x 318 x 175 mm
(38-3/4 x 12-1/2 x 6-7/8")
Net weight 2.8 - 10.3 kg (6.2 - 22.7 lbs.)

18V **LXT BL AFT XPT** 1

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

UC014GT101 / GZ 300mm (12") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion **AN** 8.0 5.0 4.0



Toolless type

Guide Bar Length 300 mm (12")
Chain Pitch 3/8"
Chain Gauge 1.1 mm (0.043")
Chain Speed 0 - 24.7 m/s
(0 - 1,482 m/min)
(0 - 4,862 FPM)
Chain Oil Tank Volume 230 mL (7.8 US oz)
Dimensions (L x W x H) 446 x 233 x 274 mm
(17-1/2 x 9-1/8 x 10-3/4")
Net weight 6.0 - 6.5 kg
(13.2 - 14.4 lbs.)

40Vmax **XGT BL XPT** 1

Saw Chain, Guide Bar, Guide Bar Cover, Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC015GT101 / GZ 350mm (14") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion **AN** 8.0 5.0 4.0



Toolless type

Guide Bar Length 350 mm (14")
Chain Pitch 3/8"
Chain Gauge 1.1 mm (0.043")
Chain Speed 0 - 24.7 m/s
(0 - 1,482 m/min)
(0 - 4,862 FPM)
Chain Oil Tank Volume 230 mL (7.8 US oz)
Dimensions (L x W x H) 446 x 233 x 274 mm
(17-1/2 x 9-1/8 x 10-3/4")
Net weight 6.0 - 6.5 kg
(13.2 - 14.4 lbs.)

40Vmax **XGT BL XPT** 1

Saw Chain, Guide Bar, Guide Bar Cover, Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC022GZ 350mm (14") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion **AN** 5.0 4.0



Toolless type

Guide Bar Length 350 mm (14")
Recommended guide bar length 300-400 mm (12-16")
Chain type 80TXL
Chain Pitch 0.325"
Chain Gauge 1.1 mm (0.043")
Chain Speed 0 - 25.5 m/s
Chain Oil Tank Volume 200 mL (6.8 US oz)
Dimensions (L x W x H) w/o Guide bar, w/BL4050F: 430 x 225 x 271 mm
(17 x 8-7/8 x 10-5/8")
Net weight 5.1 - 5.5 kg
(11.2 - 12.1 lbs.)

40Vmax **XGT BL XPT**

Guide bar, Saw chain, Guide bar case, Wrench, Round file, Chain oil, Battery, Charger, Z: Battery and Charger are sold separately

UC012GT101 / GZ 400mm (16") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion **AN** 8.0 5.0 4.0



Captive nuts type

Guide Bar Length 400 mm (16")
Chain Pitch 3/8"
Chain Gauge 1.1 mm (0.043")
Chain Speed 0 - 24.7 m/s
(0 - 1,482 m/min)
(0 - 4,862 FPM)
Chain Oil Tank Volume 230 mL (7.8 US oz)
Dimensions (L x W x H) w/o Guide Bar: 446 x 233 x 274 mm
(17-1/2 x 9-1/8 x 10-3/4")
Net weight 6.0 - 6.5 kg
(13.2 - 14.4 lbs.)

40Vmax **XGT BL XPT** 1

Saw Chain, Guide Bar, Guide Bar Cover, Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC030GZ 500mm (20") Cordless Chain Saw

New

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah 8.0 5.0 4.0



Captive nuts type

Guide Bar Length	500 mm (120")
Chain Pitch	0.325"
Chain Gauge	1.3 mm (0.05")
Chain Speed	0 - 20.0, 24.5, 29.0 m/s
Chain Oil Tank Volume	260 mL (8.8 US oz)
Dimensions (L x W x H)	w/o Guide bar, Saw chain: 449 x 232 x 280 mm (17-3/4 x 9-1/8 x 11") BL4040F - BL4080F: 6.8 - 7.8 kg (15.0 - 17.2 lbs.)
Net weight	

40Vmax



Guide bar, Saw chain, Guide bar case, Wrench, Chain oil, Round file, Battery, Charger, Z: Battery and Charger are sold separately

UC003GZ01 300mm (12") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah 5.0 4.0 2.5 2.0



Captive nuts type

Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.8 m/s (0 - 1,490 m/min) (0 - 4,880 FPM)
Chain Oil Tank Volume	200 mL (6.8 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 266 x 194 x 227 mm (10-1/2 x 7-5/8 x
Net weight	8-15/16") 3.9 - 4.5 kg (8.6 - 9.9 lbs.)

40Vmax



Saw Chain, Guide Bar, Guide Bar Cover, Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

Efficiency equal to or greater than that of 50cc-class chain saws

photo: UC030G

Guide bar length (saw chain type)

- 500mm (95TXL, 22BPX)
- 450 / 400mm (95TXL)

High speed cutting

8.7 sec.

ø400mm cedar log
Battery: BL4080H
Guide bar/ Saw chain: 500mm/ 95TXL

Max. chain speed

29.0 m/s

Excellent work efficiency with the high-output BL4080H battery and brushless motor

Recommended battery:
High-output BL4080H
for excellent performance

Li-ion 8.0 Ah

BL MOTOR

Cutting work amount
on a single full battery charge

About 28 cuts

ø400mm cedar log
Guide bar/ Saw chain:
500mm/ 95TXL

Bucking
Fast cutting with high speed and high torque

Felling
Optimal handle design for precise tree felling

When locked

Keep holding the trigger


Restarts immediately after removing the load

Excellent restartability (when locked)


If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.

Control interface with excellent visibility and operability/ Chain speed: 3 modes

Display section
With six types of icons and high-brightness LEDs, tool's status can be easily checked.



Control section
The buttons have been redesigned to provide tactile feedback, enhancing usability.



Highly visible felling line



Lock-off lever



Auto power-off time: 5 min.
Operability has been improved by redesigning the lock-off lever structure and setting the auto power-off time to 5 minutes.

Equipped with an air filter
The dust cover can be removed and attached without tools, making it easy to clean or replace the air filter.

UC031GZ 250mm (10") Cordless Chain Saw

New

40Vmax XGT Brushless Cordless Chain Saw

Li-ion Ah 5.0 4.0 2.5 2.0



Captive nuts type

Chain type	80TXL
Guide Bar Length	250 mm (10")
Chain Pitch	0.325"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.0 m/s
Oil tank capacity	150 mL (5.1 oz)
Dimensions (L x W x H)	w/o Guide Bar: 295 x 188 x 203 mm (11-5/8 x 7-3/8 x 8") 3.2 - 3.8 kg (7.1 - 8.4 lbs.)
Net weight	

40Vmax



Saw chain, Guide bar case, Round file, Chain oil, Battery, Charger, Z: Battery and Charger are sold separately

DUC353Z 350mm (14") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws

Li-ion Ah 6.0 5.0 3.0 1.5



Toolless type

Guide Bar Length	350 mm (14")
Chain Pitch	3/8"
Chain Gauge	1.3 mm (0.050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min)
Chain Oil Tank Volume	200 mL
Sound Power Level	98.7 dB(A)
Dimensions (L x W x H)	762x215x235mm (30"x8-1/2"x9-1/4")
Net weight	4.7 kg - 5.4kg (10.4 lbs - 11.8lbs)

18V x2



Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Z: Battery and Charger are sold separately



DUC357ZX4 350mm (14") Cordless Chain Saw

Consistently powerful cutting action

Li-ion Ah 6.0 5.0 3.0

Guide Bar Length	350 mm (14")
Chain Pitch	3/8"
Chain Gauge	1.3 mm (0.050")
Chain Speed	7.7 m/s
Chain Oil Tank Volume	150 mL (5.1 US oz)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	762 x 214 x 234 mm (30 x 8-3/8 x 9-1/4")
Net weight	4.2 - 4.4 kg (9.3 - 9.7 lbs.)



Toolless type

18V



Saw chain, Guide bar, Guide bar case, Battery, Charger, Z: Battery and Charger are sold separately

DUC258Z 250mm (10") Cordless Chain Saw

New

Excellent tool balance with optimal center of gravity

Li-ion Ah 6.0 5.0 3.0 1.5

Chain type	80T XL
Guide Bar Length	250 mm (10")
Chain Pitch	0.325"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.0 m/s
Oil tank capacity	140 mL (4.7 oz)
Dimensions (L x W x H)	519 x 181 x 194 mm (20-1/2 x 7-1/8 x 7-5/8")
Net weight	3.0 kg (6.6 lbs.)



Captive nuts type

18V



Guide bar, Guide bar case, Saw chain, Box wrench, Round file, Chain oil, Battery, Charger, Z: Battery and Charger are sold separately

DUC254Z 250mm (10") Cordless Chain Saw

Efficiency equivalent to 23mL class engine chain saw

Li-ion Ah 6.0 5.0 3.0 1.5

Guide Bar Length	250 mm (10")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	24 m/s (1,440 m/min)
Chain Oil Tank Volume	140 mL (4.7 oz)
Sound Power Level	w/o Guide bar: 258 x 184 x 191 mm (10-1/8 x 7-1/4 x 7-1/2")
Dimensions (L x W x H)	258 x 184 x 191 mm (10-1/8 x 7-1/4 x 7-1/2")
Net weight	2.8 - 3.3 kg (6.2 - 7.2 lbs.)



Captive nuts type

18V



Saw Chain, Guide Bar, Guide Bar Cover, Wrench, Accessory Bag, Z: Battery and Charger are sold separately

UC3541A 350mm (14") / UC4041A 400mm (16") Chain Saw

Excellent in heavy duty application

132



Toolless type

Continuous Rating Input	1,800W
Chain Speed Per Minute	870m (2,900ft)
Saw Chain Pitch	3/8" / 1.1mm (.043")
Saw Chain Gauge	1.3mm (.050")
Sound Power Level	101.3dB(A)
Dimensions (L x W x H)	455x245x200mm (17-7/8"x9-5/8"x7-7/8")
Net Weight	4.7kg (10.3lbs)

Dimensions: excluding blade and guide bar



Chain Blade, Guide Bar Cover, Hook Complete

UC3551A 350mm (14") / UC4051A 400mm (16") Chain Saw

Large trigger switch with soft start for smooth start-ups

153



Toolless type

Continuous Rating Input	2,000W
Chain Speed Per Minute	870m (2,900ft)
Guide Bar Length	UC3551A: 350mm (14")
Saw Chain Pitch	3/8"
Saw Chain Gauge	1.3mm (.050")
Sound Power Level	101.8dB(A)
Dimensions (L x W x H)	505x200x220mm (19-7/8"x7-7/8"x8-5/8")
Net Weight	5.5kg (12.1lbs)
Power Supply Cord	0.3m (0.98ft)

Dimensions: excluding blade and guide bar



Chain Blade, Guide Bar Cover, Hook Complete

UC4551A 450mm (18") Electric Chain Saw

Heavy-duty for fast and efficient cutting

153



Toolless type

Continuous rating input	2,000W
Chain speed per minute	870 m (2,900 ft)
Guide Bar Length	450 mm (18")
Saw chain	Pitch: 3/8" Gauge: 1.3 mm (0.050")
Sound Power Level	101.8 dB(A)
Dimensions (L x W x H)	505x200x220 mm (19-7/8"x7-7/8"x8-5/8")
Net weight	5.7 kg (12.4 lbs.)
Power supply cord	0.3 m (0.98 ft)

Dimensions: excluding blade and guide bar



Saw Chain, Guide Bar Cover, Hook complete

UC029GZ Cordless Pruning Saw

40Vmax XGT BL Cordless 150 mm (6") Pruning Saw

Li-ion Ah 4.0 2.5 2.0

Guide bar length	150 mm (6")
Saw chain	Type: 80T XL Pitch: 0.325" Gauge: 1.1 mm (0.043")
Oil tank capacity	55 mL (1.9 oz)
Chain speed	8.0 m
Dimensions (L x W x H)	w/BL4025: 474 x 95 x 255 mm (18-5/8 x 3-3/4 x 10")
Net weight	2.1 - 2.4 kg (4.6 - 5.3 lbs.)




Toolless type



Oil vessel set, Guide bar, Saw chain, Battery, Charger, File holder set, Chain cover Z: Battery and Charger are sold separately

Automatic chain lubrication



minimizes the chance that saw chain will stall due to forgetting to supply chain oil.

Tool-less change and tension adjustment of saw chain



- Simply loosen and re-tighten the lever to automatically adjust the tension of saw chain.
- This easy-to-operate large lever is designed to be pulled up and turned easily.



photo: UC029G

Work efficiency

70% UP*

Battery: BL4025 on a full battery charge

* Compared with our 18V models

Work amount

415 pcs.

Battery: BL4025

Test conditions

Cut ø50 cypress wood under an optimal pressing load of 25N or less on the cutting edge

DUC150Z 150mm (6") Cordless Pruning Saw

Easy-to-use, compact product enables easy pruning of garden or orchard trees

Li-ion Ah 6.0 5.0 3.0 1.5



Toolless type

Guide bar length	150 mm (6")
Saw chain	Type: 80TXL Pitch: 0.325" Gauge: 1.1 mm (0.043")
Chain speed	8.0 m/s (480 m/min) (1,570 FPM)
Max cutting length	161 mm
Chain oil tank volume	55 mL (1.9 USoz)
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 459 x 90 x 249 mm (18 x 3-1/2 x 9-3/4")
Net weight	1.7-2.0 kg (3.7-4.4 lbs.)

18V



Saw chain, Guide bar, Guide bar case, Battery, Charger, Z: Battery and Charger are sold separately

UC100DZ 100mm (4") Cordless Pruning Saw

Easy-to-use, compact product enables easy pruning of garden or orchard trees

Li-ion Ah 5.0 4.0 2.0 1.5



Toolless type

Guide bar length	100 mm (4")
Saw chain	Type: 80TXL Pitch: 0.325" Gauge: 1.1 mm (0.043")
Chain speed	8.0 m/s (480 m/min) (1,570 FPM)
Chain oil tank volume	55 mL (1.9 USoz)
Dimensions (L x W x H)	w/o Battery: 350 x 90 x 215 mm (13-3/4 x 3-1/2 x 8-1/2") w/ BL1041B: 398 x 90 x 226 mm (15-5/8 x 3-1/2 x 8-7/8")
Net weight	1.5-1.6 kg (3.3-3.5 lbs.)

12Vmax



Saw chain, Guide bar, Guide bar cover, Battery, Charger, DZ: Battery and Charger are sold separately

UA001GZ01 250mm (10") Cordless Pole Saw

40Vmax XGT BL AFT 25 cm (10") Cordless Pole Saw

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



1

Guide Bar Length	250 mm (10")
Saw chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	w/o Guide Bar: 2,228 x 157 x 189 mm (87-3/4 x 6-3/16 x 7-7/16")
Net weight	6.0 - 7.3 kg (13.2 - 16.1 lbs.)

40Vmax



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly, Battery, Charger, Z: Battery and Charger are sold separately

UA002GM102 / GZ01 250mm (10") Cordless Telescopic Pole Saw

40Vmax XGT BL AFT 25 cm (10") Cordless Telescopic Pole Saw

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



1

Guide Bar Length	250 mm (10")
Saw chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	w/o Guide Bar: 2,515 - 3,747 x 157 x 191 mm (99 - 147-1/2 x 6-3/16 x 7-7/16")
Net weight	7.6 - 8.9 kg (16.8 - 19.6 lbs.)

40Vmax



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Hex Wrench, Band Assembly, Battery, Charger, Z: Battery and Charger are sold separately

DUA301ZB 300mm (12") Cordless Telescopic Pole Saw

High cutting efficiency

Li-ion Ah 6.0 5.0 3.0



Guide Bar Length	300 mm (12")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	2,554 - 3,789 x 155 x 193 mm (100-1/2" - 149" x 6-1/8" x 7-5/8")
Net weight	7.8 - 8.5 kg

18V x2



Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

DCU601Z Battery Powered Wheelbarrow (Electric Lift)

4-Wheel Battery Powered Wheelbarrow, Electric Lift

Li-ion Ah 6.0 5.0 3.0 1.5



1

Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Continuous use	w/ BL1860B x4: 100 min
Lift height	475 - 1,020 mm (18-3/4 - 40-1/4")
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,400 x 730 x
Net weight	820 - 1,030 mm 145 kg (320 lbs.)

18V x2



Z: Battery and Charger are sold separately

Battery Powered Wheelbarrow powered by two 18V LXT batteries in series

	on flat ground (0 - 3 degrees)	on slope (3 - 12 degrees)	
Max load capacity	300 kg	180 kg	Traveling distance 7.2 km with BL1860B x 4

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)



photo: DCU604

1 Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.

2 Electric brake plus Electromagnetic brake

Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electromagnetic brake

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.

DCU601 Electric lift type

- The electric lift is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.

Compatible with various sizes of loads



Loading platform size: 965 x 645 mm (L x W)



DCU602 Electric dump type

- Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually.
- The electric dump is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.

Bucket capacity	
Heaped capacity	Full liquid capacity
200 L	100 L



(Tilts to 75° in approx. 30 seconds.)

DCU603 Manual dump + Dump bucket

- Rust-free plastic bucket accepts wet loads.
- Inside bottom and front faces are angled for easy dump operation.



Manual dump
designed for increased efficiency in unloading



DCU604 Manual dump + Pipe frame carrier

Ideal for container boxes or bagged materials



Manual dump
High unloading efficiency



Telescopic loading platform
945 - 1,090mm
625 - 1,015mm

DCU605 Flat bucket

- Rust-free plastic bucket accepts wet loads.
- Optimal for operations not requiring dump function such as feeding in stables



There is no screw on the inside of the bucket, allowing for smooth unloading operation using tool such as a clay-spade.



Capped nozzle for draining liquid is convenient when carrying liquid or cleaning the bucket.



DCU602Z Battery Powered Wheelbarrow (Electric Dump)


4-Wheel Battery Powered Wheelbarrow, Bucket with Electric Dump

Li-ion Ah 6.0 5.0 3.0 1.5



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Continuous use	w/ BL1860B x4: 100 min
Bucket capacity	Heaped capacity: 200 L
Swivel range of dump unit	90°
Max Climbing Capacity	12°
Dimensions (L x W x H)	at its smallest: 1,480 x 730 x 820 mm
Net weight	147 kg (324 lbs.)

18V x2



Z: Battery and Charger are sold separately

DCU603Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL 4-Wheel Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Dump bucket
Part No. 191B69-8



Dump unit set
Part No. 191B63-0



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,480 x 730 x 820 mm (58-1/4 x 28-3/4 x 32-1/4")
Net weight	122 - 124 kg (269 - 273 lbs.)

18V x2



Z: Battery and Charger are sold separately

DCU604Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Carrier set
Part No. 191B67-2



Dump unit set
Part No. 191B63-0



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,450 x 730 x 820 mm (57 x 28-3/4 x 32-1/4")
Net weight	119 - 120 kg (262 - 265 lbs.)

18V x2



Z: Battery and Charger are sold separately

DCU605Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ah 6.0 5.0 3.0 1.5



Flat bucket set
Part No. 191B3-6



Max load capacity	Flat ground (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs)
Traveling Speed	Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,440 x 730 x 820 mm (56-5/8 x 28-3/4 x 32-1/4")
Net weight	104 - 106 kg (229 - 234 lbs.)

18V x2



Z: Battery and Charger are sold separately

UH014GZ 750mm (29-1/2") Cordless Hedge Trimmer

40Vmax XGT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 5.0 4.0 2.5 2.0



Blade Length	750 mm (29-1/2")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	High / Mid / Low: 5,000 / 3,600 / 2,000
Dimensions (L x W x H)	w/o Battery: 1,225 x 270 x 135 mm w/ BL4020 / BL4025: 1,225 x 270 x 135 mm w/ BL4040: 1,225 x 270 x 150 mm w/ BL4050F: 1,225 x 270 x 168 mm
Net weight	4.0 - 4.7 kg (8.8 - 10.4 lbs.)

40Vmax



Blade Cover, Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

UH006GZ 600mm (23-5/8") Cordless Hedge Trimmer

Reliable cutting performance like engine/AC hedge trimmers

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	25.0 mm (1")
Strokes Per Minute (SPM)	High / Mid / Low: 4,000 / 3,000 / 2,000
Sound Pressure Level	81 dB(A)
Sound Power Level	92 dB(A)
Vibration Level	Front / Rear: 3.0 / 2.5 m/s ² or less w/ BL4020 / BL4025: 1,123 x 223 x 191 mm (44-1/4 x 8-3/4 x 7-1/2")
Dimensions (L x W x H)	
Net weight	4.4 - 5.0 kg (9.7 - 11.0 lbs.)

40Vmax



Blade Cover, Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

DUH751Z 750mm (29-1/2") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Length	750 mm (29-1/2")
Strokes Per Minute (SPM)	High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000
Vibration Level	2.5 m/s ²
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	1,261 x 225 x 192 mm (49-1/2" x 8-7/8" x 7-1/2")
Net weight	3.8 - 4.5 kg (8.4 - 9.8 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

DUH606Z 600mm (23-5/8") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,000
Continuous Use (min.)	w/ BL1860B: 70
Dimensions (L x W x H)	1,016 x 207 x 185 mm (40 x 8-1/8 x 7-1/4")
Net weight	2.7 - 3.0 kg (6.0 - 6.6 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

UH020GZ 500mm (19-3/4") Cordless Hedge Trimmer

40Vmax XGT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0

Blade Length	500 mm (19-3/4")
Tooth Spacing	30.0 mm (1-3/16")
Max branch diameter	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,200 min-1
Continuous use	w/BL4040:110 min
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	w/BL4040: 929 x 207 x 185 mm (36-1/2 x 8-1/8 x 7-1/4")
Net weight	3.0 - 4.2 kg (6.6 - 9.3 lbs.)

40Vmax



Blade cover, Chip receiver, Battery, Charger, Easy shake off filter, Z: Battery and Charger are sold separately

**DUH506Z 500mm (19-3/4") Cordless Hedge Trimmer**

18V LXT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion **AN** 6.0 5.0 3.0 1.5

Blade Length	500 mm (19-5/8")
Max Cutting Capacity	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,000
Continuous Use (min.)	w/BL1860B: 75
Dimensions (L x W x H)	897 x 207 x 185 mm (35-1/4 x 8-1/8 x 7-1/4")
Net weight	2.5 - 2.9 kg (5.5 - 6.4 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

DUH507F001 / Z 500mm (19-3/4") Cordless Hedge Trimmer

Large main switch lever for improved switch operation

Li-ion **AN** 6.0 5.0 3.0 1.5

Blade Length	500 mm (19-5/8")
Effective cutting length	498 mm (19-5/8")
Max branch dia.	15 mm (9/16")
Tooth spacing	28 mm (1-1/8")
Strokes Per Minute (SPM)	2,700
Continuous Use (min.)	w/BL1830B: 77
Dimensions (L x W x H)	w/BL1830B / BL1850B / BL1860B: 925 x 209 x 188 mm (36-1/2 x 8-1/4 x 7-3/8")
Net weight	2.7 - 3.0 kg (6.0 - 6.6 lbs.)

18V



Blade cover, Battery, Charger, Z: Battery and Charger are sold separately

UH353DZ 350mm (13-3/4") Cordless Hedge Trimmer

Lightweight, Low Vibration, Low Noise

Li-ion **AN** 5.0 4.0 2.0 1.5

Max Output Power	170W
Cycles Per Minute (cpm)	1,650
Strokes Per Minute (SPM)	3,300
Cutting width	350 mm (13-3/4")
Max Cutting Capacity	15 mm (9/16)
Dimensions (L x W x H)	693 x 175 x 165 mm (27-1/4 x 6-7/8 x 6-1/2)
Net weight	2 - 2.1 kg (4.3 - 4.7 lbs.)

12Vmax



Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

UN001GZ 600mm (23-5/8") Cordless Pole Hedge Trimmer

40Vmax XGT BL Brushless Cordless Pole Hedge Trimmer

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0

Blade Length	600 mm (23-5/8")
Max Cutting Capacity	25 mm (1")
No load speed	High / Med / Low: 2,000 / 1,500 / 1,000
Strokes Per Minute (SPM)	High / Med / Low: 4,000 / 3,000 / 2,000
Cycles per minute (CPM)	High / Med / Low: 2,000 / 1,500 / 1,000
Continuous use	w/BL4040F, High:65min
Dimensions (L x W x H)	2,268 x 100 x 148 mm (89-1/2 x 3-15/16 x 5-7/8")
Net weight	4.7 - 5.9 kg

40Vmax



Blade cover, Shoulder harness, Battery, Charger, Z: Battery and Charger are sold separately

DUN500WZ 500mm (19-3/4") Cordless Pole Hedge Trimmer

18V LXT BL Brushless Cordless Pole Hedge Trimmer

Li-ion **AN** 6.0 5.0 3.0 1.5

Blade Length	500 mm (19-3/4")
Max Cutting Capacity	23.5 mm (15/16")
Sound Pressure Level	81.5 dB(A)
Sound Power Level	92.5 dB (A)
Vibration Level	
Left hand (Front grip / Handle)	4.7 m/s ²
Right hand (Rear grip)	2.5 m/s ² or less
Strokes Per Minute (SPM)	High / Med / Low: 4,400 / 3,600 / 2,000
Overall length	2,115 mm
Net weight	4.5 kg (9.9 lbs.)

18V



Blade Cover, Harness, Battery, Charger, Z: Battery and Charger are sold separately

DUN461WZ 460mm (18-1/8") Cordless Pole Hedge Trimmer

Telescopic pipe for no need of stepladders

Li-ion **AN** 6.0 5.0 3.0 1.5

Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Continuous Use (min.)	w/BL1830B: 60
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 - 99 x 3-7/16 x 5-1/4")
Net weight	w/BL1860B: 3.4 kg (7.5 lbs.)

18V



Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately

UN460WDZ
460mm (18-1/8") Cordless Pole Hedge Trimmer

12Vmax LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer

Li-ion Ah 5.0 4.0 2.0 1.5



Blade Length	460 mm (18-1/8")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute (SPM)	3,600
Cycles Per Minute (CPM)	1,800
Dimensions (L x W x H)	1,889 - 2,511 x 87 x 133 mm (74-1/2 x 99 x 3-7/16 x 5-1/4")
Net weight	3.0 kg (6.6 lbs.)

12Vmax **CXT XPT** 1

Blade Cover, Battery, Charger

UH201DZ
200mm (7-7/8") Cordless Hedge Trimmer

12Vmax CXT Li-Ion Cordless 20 cm (7-7/8") Hedge Trimmer

Li-ion Ah 5.0 4.0 2.0 1.5



Blade Length	200 mm (7-7/8")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	504 x 120 x 131 mm (19-7/8"x4-3/4"x5-1/8")
Net Weight	1.3 - 1.5 kg (2.8 - 3.3 lbs)

12Vmax **CXT 2-in-1** 2

Base Frame, Blade Cover, Battery, Charger

DUM604SF / Z 160mm (6-5/16") Cordless Grass Shear

18V LXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	160 mm (6-5/16")
Depth Adjustment	15, 20, 25 mm (9/16", 13/16", 1")
Strokes Per Minute (SPM)	2,500
Continuous Use (min.)	with BL 1860B / BL 1850B / BL 1840B / BL 1830B / BL 1820B / BL 1815N: 250 / 200 / 160 / 125 / 80 / 60
Dimensions (L x W x H)	337x177x131 mm (13-1/4"x7"x5-1/8")
Net weight	1.4 - 1.8 kg (3.2 - 4.0 lbs)

18V **LXT 2-in-1** 2

Grass Receiver, Blade Cover, Z: Battery and Charger are sold separately



DUM111SYX 110mm Cordless Grass Shear

11 cm cutting width for optimum performance

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	110 mm
Strokes Per Minute (SPM)	2,500
Continuous Use (min.)	with BL 1860B / BL 1850B / BL 1830B / BL 1820B / BL 1815N: - / - / - / - / 45
Dimensions (L x W x H)	333 x 120 x 131 mm
Net weight	1.4 - 1.7 kg (3.2 - 3.8 lbs.)

18V **LXT 2-in-1**

Blade Cover, Battery, Charger

UM600DWA / DZ 160mm (6-5/16") Cordless Grass Shear

12Vmax CXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear

Li-ion Ah 5.0 4.0 2.0 1.5



Cutting Width	160 mm (6-5/16")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	329x177x131 mm (13"x7"x5-1/8")
Net Weight	1.3 - 1.5 kg (2.8 - 3.3 lbs)

12Vmax **CXT 2-in-1** 3

Base Frame, Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

UR012GZ04 Cordless Grass Trimmer

80Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting Width	Metal Blade: 305 mm TCT Saw Blade: 255 mm Chisel Blade: 225 mm Nylon Cutting Head: 480 mm Shredder Blade: 270 mm Plastic Blade: 305 mm
No Load Speed (RPM)	Metal Blade (3/2/1): 0 - 6,800 / 0 - 5,000 / 0 - 3,500 Nylon Cutting Head (3/2/1): 0 - 5,000 / 0 - 4,200 / 0 - 3,500 Plastic Blade (3/2/1): 0 - 6,800 / 0 - 5,000 / 0 - 3,500
Spindle Size	M10 x 1.25 LH
Net weight	8.0 - 9.3 kg (17.6 - 20.5 lbs.)

40Vmax x2 **XGT BL ADT AFT WG** 1

Safety Goggles, Metal Blade / Nylon Cutting Head, Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately



UR013GZ03 Cordless Grass Trimmer

40Vmax XGT BL AFT Cordless Grass Trimmer, Bike Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting Width	Metal Blade: 255 mm
	Chisel Blade: 225 mm
	Nylon Cutting Head: 450 mm
	Shredder Blade: 270 mm
	Plastic Blade: 305 mm
No Load Speed (RPM)	0 - 6,700
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,905 x 688 x 574 mm (75 x 27 x 22-5/8")
Net weight	5.9 - 7.3 kg (13.0 - 16.1 lbs.)

40Vmax



Metal blade / Nylon cutting head, Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

UR008GZ01 Cordless Grass Trimmer


40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting Width	Nylon Cutting Head: 430 mm (17")	
	Plastic Blade: 305 mm (12")	
No Load Speed (RPM)	Nylon Cutting Head (3/2/1): 0 - 5,000 / 0 - 4,600 / 0 - 4,000	
	Plastic Blade (3/2/1): 0 - 6,000 / 0 - 4,600 / 0 - 4,000	
	Spindle Size	M10 x 1.25 LH
	Dimensions (L x W x H)	w/o Cutting Tool, w/o Battery: 1,803 x 224 x 300 mm (71 x 8-7/8 x 11-3/4")
Net weight	5.0 - 5.7 kg (11.0 - 12.6 lbs.)	

40Vmax



Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UR003GZ Cordless Grass Trimmer


40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting Width	Metal Blade: 230 mm (9")
	Nylon Cutting Head: 350 mm (13-3/4")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low: 0 - 6,500 / 5,300 / 3,500
	Spindle Size
Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4020 / BL4025 / BL4040: 1735 x 355 x 230 mm (68-1/4 x 14 x 9")
	Net weight

40Vmax



Safety Goggles, Metal Blade / Nylon Cutting Head, Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

UR017GZ Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle

Li-ion Ah 5.0 4.0 2.5 2.0



Cutting Width	Metal blade: 230 mm (9")
	Nylon cutting head: 330 mm (13")
No Load Speed (RPM)	Plastic blade: 255 mm (10")
	High / Med. / Low: 6,500 / 5,300 / 3,500
Spindle size	M10 x 1.25 LH
Dimensions (L x W x H)	1,890 x 362 x 265 mm (74-1/2 x 14-1/4 x 10-3/8")
	Net weight

40Vmax



Nylon cutting head, Plastic blade, Shoulder belt, Box driver, Hex wrench, Accessory bag, Battery, Charger, Z: Battery and Charger are sold separately

UR202CZ Battery Powered Grass Trimmer


BL ADT AFT Battery Powered 3-Speed Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	Nylon cutting head: 430 mm (17")
	Plastic blade: 305 mm (12")
No Load Speed (RPM)	Nylon cutting head (3 / 2 / 1): 0 - 5,000 / 0 - 4,600 / 0 - 4,000
	Spindle Size
Dimensions (L x W x H)	1,783 x 226 x 300 mm (70-1/4 x 8-15/16 x 11-7/8")
	Net weight

40Vmax



Safety Goggles, Metal Blade / Nylon Cutting Head, Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

DUR369LZ Cordless Grass Trimmer


18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	Metal Blade: 255 mm (10")
	Trimmer Head: 430 mm (17")
No Load Speed (RPM)	Plastic Blade: 305 mm (12")
	High / Med / Low: 3,300 / 7,000 / 5,500 / 4,600
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1,846 x 400 x 269 mm (72-1/2 x 15-3/4 x 10-5/8")
	Net weight

18V x2



Safety Goggles, Metal Blade / Nylon Cutting Head, Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Shoulder Belt, Battery, Charger

DUR368LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	Metal Blade: 255 mm (10")
	Trimmer Head: 350 mm (13-3/4")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Med / Low: 6,500 / 5,300 / 3,500
	Spindle Size
Sound Power Level	4-Tooth Blade: 89.2 dB(A)
Dimensions (L x W x H)	Nylon Cutting Head: 89 dB(A)
	1,758 x 362 x 231 mm (69-1/4 x 14-1/4 x 9-1/8")
Net weight	3.9 - 4.5 kg (8.6 - 10.0 lbs.)

18V x2



Safety Goggles, Metal Blade / Nylon Cutting Head, Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

DUR189Z Cordless Grass Trimmer

18V LXT BL ADT Cordless Grass Trimmer, Short Telescopic Pipe, Loop Handle

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width	Trimmer Head: 300 mm (11-3/4")
	Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High / Mid / Low / ADT Mode: 6,000 / 5,000 / 4,000 / 4,000 - 6,000
	Spindle Size
Max Run Time (min)	Nylon Cutting Head, BL1860B: 168
	Plastic Blade, BL1860B: 219
Net weight	3 - 3.3 kg (6.6 - 7.3 lbs.)

18V



Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately

DUR193RT / SF / Z Cordless Grass Trimmer

18V LXT Li-Ion Cordless Grass Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width	Trimmer Head: 260 mm (10-1/4")
No Load Speed (RPM)	7,800
Max Run Time (min)	w/ BL1830B: 45
Dimensions (L x W x H)	1,194 - 1,384 x 271 x 372 mm (47-54-1/2 x 10-5/8 x 14-5/8")
Net weight	2.4 - 2.7 kg (5.3 - 6.0 lbs.)

18V LXT XPT 1

Shoulder Belt, Nylon Cutting Head, Metal Blade / Nylon Cutting Head, Hex Wrench, Box Driver, Accessory Bag, Battery, Charger, Z: Battery and Charger are sold separately

UR100DWA / DZ Cordless Grass Trimmer

Compact size is ideal for trimming and precise edging

Li-ion Ah 5.0 | 4.0 | 2.0 | 1.5



Cutting Width	Nylon Cutting Head : 260 mm (10") Plastic Blade: 230 mm (9")
No Load Speed (RPM)	10,000
Spindle Size	M8 x 1.25 RH
Dimensions (L x W x H)	835-1,195x267x210-315
Net weight	1.9 - 2.1 kg (4.3 - 4.6 lbs.)

12Vmax CXT XPT 2

Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charger, DZ: Battery and Charger are sold separately

UR3000 300mm (11-3/4") String Trimmer

Lightweight AC string trimmers for do-it-yourselfers



Continuous Rating Input	450W
Cutting Width	300 mm (11-3/4")
No Load Speed (RPM)	9,000
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	1,016-1,256x301x262mm (40-49-1/2x11-7/8x10-3/8")
Net Weight	2.6kg (5.7lbs)
Power Supply Cord	10m

6

Extension Cord with Lock, Shoulder Strap, Safety Goggles, Nylon Cord

LM004JZ 530mm (21") Cordless Lawn Mower

3 cutting modes (Normal/ Soft no-load/ Noise reduction)

Li-ion Ah 10.0 | 4.0



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	2,300 - 2,800
Propelling speed	1.5 - 6.5 km/h/39
Wheel diameter	230 / 230 mm (9 / 9")
Dimensions (L x W x H)	1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
Net weight	31.5 - 34.6 kg (69.5 - 76.3 lbs.)

64Vmax BL SOFT NOLOAD XPT 1

Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

LM002JM101 530mm (21") Cordless Lawn Mower

High power cordless lawn mower powered by 64Vmax (57.6V) Li-Ion battery

Li-ion Ah 10.0 | 4.0



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	2,300 - 2,800
Actual Mowing Area	1,600 m ²
Continuous Use (min.)	39
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	1,710 - 1,800 x 585 x 985 - 1,115 mm (67-1/2 - 71 x 23 x 38-3/4 - 44")
Net weight	25.7 - 27.6 kg

64Vmax BL SOFT NOLOAD XPT 1

Blade, Mulching Plug, Socket Wrench, Rod, Battery, Charger



LM001GZ 480mm (18-7/8") Cordless Lawn Mower

40Vmax XGT BL Cordless 48 cm (18-7/8") Self-Propelled Lawn Mower

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	62 L
No Load Speed (RPM)	2,500 - 3,200
Propelling speed	1.5 - 5.0 km/h
Wheel diameter	230 / 230 mm (9 / 9")
Dimensions (L x W x H)	During operation: 1,670 - 1,745 x 550 x 965 - 1,075 mm (65-3/4 - 68-3/4 x 21-5/8 x 38 - 42-1/4")
Net weight	28.0 - 33.0 kg (61.7 - 72.8 lbs.)

40Vmax XGT BL SOFT NOLOAD XPT 1

Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

LM004GZ 430mm (17") Cordless Lawn Mower

40Vmax XGT BL Cordless 43 cm (17") Lawn Mower

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Cutting Width	430 mm (17")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
Grass Box Capacity	50 L
No Load Speed (RPM)	3,800 min ⁻¹
Continuous use (approx.) on a full battery charge	w/ BL4080F: 52 min
Wheel diameter	140 / 165 mm
Dimensions (L x W x H)	During operation: 1,390 - 1,440 x 460 x 990 - 1,020 mm
Net weight	15.6 - 18.2 kg (34.4 - 40.1 lbs.)

40Vmax XGT XPT 1

Socket wrench, Blade, Mulching plug, Grass catcher, Battery, Charger, Z: Battery and Charger are sold separately

LM001CZ 534mm (21") Battery Powered Lawn Mower

Mows 5,700 m² with PDC1200



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ PDC01, Self-Propelled: 1,700 m ² w/ PDC01, push-drive: 2,300 m ² w/ PDC1200, Self-Propelled: 4,200 m ² w/ PDC1200, push-drive: 5,700 m ²
Continuous Use (min.) *PDC01 (BL1860B X4)	w/ PDC01, Self-Propelled: 40 w/ PDC01, push-drive: 50 w/ PDC1200, Self-Propelled: 100 w/ PDC1200, push-drive: 130
Dimensions (L x W x H)	1,630 - 1,715 x 590 x 990 - 1,095 mm
Net weight	41.9 - 49.2 kg (92.4 - 108.5 lbs.)



Blade, Mulching plug, Side discharge mouth, Socket wrench, Rod

DLM539Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,000
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ BL1860B x2, Self-Propelled: 700 m ² w/ BL1860B x2, Push-Drive: 800 m ²
Continuous Use (min.)	w/ BL1860B x2, Self-Propelled: 22 w/ BL1860B x2, Push-Drive: 25
Dimensions (L x W x H)	During Operation: 1,810 - 1,870 x 580 x 920 - 1,040 mm
Net weight	28.0 - 30.5 kg



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM538Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,000
Actual Mowing Area	w/ BL1860B x2, Push-Drive: 800 m ² w/ BL1860B x2, Push-Drive: 25
Continuous Use (min.)	w/ BL1860B x2, Push-Drive: 25
Dimensions (L x W x H)	During Operation: 1,810 - 1,870 x 580 x 920 - 1,040 mm
Net weight	25.6 - 28.1 kg (56.4 - 61.9 lbs.)



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM533Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) LXT BL Cordless 53 cm (21") Self-Propelled Lawn Mower



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Dimensions (L x W x H)	1,655 - 1,740 x 590 x 990 - 1,100 mm (65"-68-1/2" x 23-1/4" x 39"-43-1/4")
Net weight	42.8 - 46.7 kg (94.4 - 103 lbs.)



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM532Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) LXT BL Cordless 53 cm (21") Self-Propelled Lawn Mower



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Dimensions (L x W x H)	1,630 - 1,715 x 590 x 990 - 1,190 mm (64"-67-1/2" x 23-1/4" x 39"-46-3/4")
Net weight	39.0 - 42.8 kg (86.0 - 94.4 lbs.)



Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM530Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) LXT BL Cordless 53 cm (21") Lawn Mower



Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	2,300 - 2,800
Dimensions (L x W x H)	1,630 - 1,715 x 590 x 990 - 1,190 mm (64"-67-1/2" x 23-1/4" x 39"-46-3/4")
Net weight	35.5 - 39.3 kg (78.3 - 86.6 lbs.)



Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM481Z 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,100
Propelling Speed	2.5 - 5.0 km/h
Actual Mowing Area	w/ BL1860B x2, Self-Propelled: 650 m ² w/ BL1860B x2, Push-Drive: 800 m ²
Continuous Use (min.)	w/ BL1860B x2, Self-Propelled: 23 w/ BL1860B x2, Push-Drive: 28
Dimensions (L x W x H)	During Operation: 1,690 - 1,740 x 530 x 930 - 1,060 mm
Net weight	27.1 - 29.3 kg



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM480Z 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower



Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM)	3,100
Actual Mowing Area	w/ BL1860B x2, Push-Drive: 800 m ²
Continuous Use (min.)	w/ BL1860B x2, Push-Drive: 28
Dimensions (L x W x H)	During Operation: 1,690 - 1,740 x 530 x 930 - 1,060 mm
Net weight	24.5 - 26.8 kg (54.0 - 59.1 lbs.)



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM462Z 460mm (18") Cordless Lawn Mower

18V X2 LXT BL Brushless Cordless 46 cm (18") Self-Propelled Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width 460 mm (18")
Cutting Height 20 - 100 mm (13/16" - 3-15/16")
No Load Speed (RPM) 2,500 - 3,300
Propelling speed 2.5 - 5.0 km/h
Dimensions (L x W x H) 1,610-1,690x535x980-1,095 mm (63-1/2"-66-1/2"x21"x38-1/2"-43")
Net weight 35.3 - 39.0 kg (77.8 - 86.0 lbs.)

18V x2



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM382CF2 / Z 380mm (15") Cordless Lawn Mower

2-in-1 Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width 380 mm (15")
Cutting Height 20 - 75 mm (13/16" - 2-15/16")
No Load Speed (RPM) 3,700
Dimensions (L x W x H) 1,380-1,410x450x985-1,005 mm (54-1/4"-55-1/2"x17-3/4"x38-3/4"-39-1/2")
Net weight 16.2 - 16.9 kg (35.7 - 37.3 lbs.)

18V x2



Blade, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

Lawn care/Grass care

* Discharge chute required.

	Battery	Battery slots	Class	Deck	Soft no load	Self-Propelled	BL MOTOR	Rear discharge	Side discharge
LM004J	64V max	1	530 mm (21")	Steel	✓	✓	✓	✓	✓*
LM001J			480 mm (18-7/8")	Plastics	✓	-	✓	✓	-
LM001C	40V max	-	530 mm (21")	Steel	✓	✓	✓	-	✓*
LM001G		2	480 mm (18-7/8")		✓	✓	✓	✓	✓
LM004G		1	430 mm (17")	Plastics	-	-	-	-	-
DLM533	18V x2	4	530 mm (21")	Aluminum	✓	✓	✓	✓	-
DLM532				Steel	✓	✓	✓	-	✓
DLM530				✓	-	✓	-	✓	
DLM538		2	530 mm (21")	Plastics	✓	-	-	✓	-
DLM539					✓	✓	-	✓	-
DLM480		480 mm (18-7/8")	-	-	-	✓	-	-	
DLM481			-	✓	-	✓	-		
DLM462		4	460 mm (18-1/18")	Steel	✓	✓	✓	-	-
DLM382		2	380 mm (15")	Plastics	-	-	-	-	-
DLM330					1	330 mm (13")	-	-	-

DLM330Z 330mm (13") Cordless Lawn Mower

18V LXT Li-Ion Cordless 330 mm (13") 3 in 1 Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Cutting Width 330 mm (13")
Cutting Height 20 - 75 mm (13/16" - 2-15/16")
Grass Box Capacity 30 L
No Load Speed (RPM) 4,300
Actual Mowing Area w/ BL1840B: 270 m²
Continuous Use (min.) w/ BL1840B: 14
Wheel Size Front / Rear: 140 / 180 mm (5-1/2" / 7-1/8")
Dimensions (L x W x H) During Operation: 1,285 - 1,350 x 375 x 935 - 975 mm, When Stored (w/o Grass Box): 520 x 375 x 775 mm
Net weight 11.6 - 12.5 kg

18V



Blade, Mulching Plug, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

DLM230Z 230mm (9") Cordless Lawn Mower

18V LXT Cordless 23 cm (9") 2-in-1 Lawn Mower

Li-ion Ah 6.0 | 5.0 | 3.0



Cutting Width 230 mm (9")
Cutting Height 10 - 55 mm
Grass Box Capacity 20 L
No Load Speed (RPM) 7,000
Actual Mowing Area w/ BL1830B: 90 m²
Continuous Use (min.) w/ BL1830B: 6 min
Wheel Diameter 130 / 55 mm
Dimensions (L x W x H) During Operation: 860 - 1,105 x 256 x 680 - 920 mm, When Stored (w/o Grass Box): 264 x 363 x 780 mm
Net weight 8.6 - 8.9 kg

18V



Blade, Hex wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

ELM4620 460mm (18-1/8") Electric Lawn Mower

1,800N 4-in-1 Electric Mower



Continuous rating input	1,800W
Cutting Width	460 mm (18-1/8")
Cutting Height	20-75mm(13/16"-2-15/16")
No Load Speed (RPM)	2,950
Recommended mowing area up to	800 m ²



Blade, Wrench, Mulch Plug

ELM4620 460mm (18-1/8") Electric Lawn Mower

1,800N 4-in-1 Electric Mower



Continuous rating input	1,800W
Cutting Width	460 mm (18-1/8")
Cutting Height	20-75mm(13/16"-2-15/16")
No Load Speed (RPM)	2,950
Recommended mowing area up to	800 m ²



Blade, Wrench, Mulch Plug

ELM3720 370mm (14-1/2") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input	1,400W
Cutting Width	370 mm (14-1/2")
Cutting Height	20-55mm(13/16"-2-3/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	500 m ²



Blade, Wrench

DLM230Z 230mm (9") Cordless Lawn Mower

18V LXT Cordless 23 cm (9") 2-in-1 Lawn Mower



Li-ion Ah 6.0 5.0 3.0

Cutting Width	230 mm (9")
Cutting Height	10 - 55 mm
Grass Box Capacity	20 L
No Load Speed (RPM)	7,000
Actual Mowing Area w/BL1830B:	90 m ²
Continuous Use (min.) w/BL1830B:	6 min
Wheel Diameter	130 / 55 mm
Dimensions (L x W x H)	During Operation: 860 - 1,105 x 256 x 680 - 920 mm, When Stored (w/o Grass Box): 264 x 363 x 780 mm
Net weight	8.6 - 8.9 kg



Blade, Hex wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

ELM4121 410mm (16-1/8") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input	1,600W
Cutting Width	410 mm (16-1/8")
Cutting Height	20-75mm(13/16"-2-15/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	600 m ²



Blade, Wrench, Mulch Plug, Side Discharge Mouth

ELM3320 330mm (13") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input	1,200W
Cutting Width	330 mm (13")
Cutting Height	20-55mm(13/16"-2-3/16")
No Load Speed (RPM)	3,400
Recommended mowing area up to	400 m ²



Blade, Wrench

UV001GZ Cordless Scarifier

40Vmax XGT BL Cordless 380mm (15") Scarifier

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Cutting width	380 mm (15")
Working depth	-12 mm (-15/32") to 5 mm (+3/16")
Continuous run time on full battery charge	w/ BL4080F x2, Vertical cutter: 38 min Thatching blade: 41 min
Actual mowing area on full battery charge	w/ BL4080F x2, Vertical cutter: 500 m ² Thatching blade: 510 m ²
No load speed (RPM)	3,200
Grass catcher capacity	50 L
Dimensions (L x W x H)	1,020-1,240 x 680 x 915-1,155 mm
Net weight	18.7-23.8 kg (41.2-52.5 lbs.)



Vertical cutter, Thatching blade, Socket wrench, Grass catcher, Battery, Charger, Z: Battery and Charger are sold separately

Photo: UV001G

More air

More water

For improved lawn rooting

Working width 380mm

Vertical cutter Aeration applications

Able to perform both thatching and vertical cutting to cut through runners and roots

Highly durable vertical cutter

- Blunt angled blade tip slows blade wear to minimize the reduction in working depth.
- The slow wear reduces blade change frequency and running cost.



Cordless comfort for sharp, smooth, and effortless pruning

Lightweight at **0.76 kg**
Tool only
With BL1830B: 1.4kg

Max cutting diameter **ø30 mm**

BL MOTOR



The sensor built into the motor ensures smooth blade synchronization with the trigger. It offers excellent trigger responsiveness even at low speeds for precise pruning.

photo: DUP181

Power lamp



Standby mode

Convenient for temporarily storing the tool in a holster between tasks. Pull and hold the trigger for approx. 3 seconds to fully close the blade. (To return to normal mode, pull the trigger twice.)

Automatic power off

When left unused for 5 minutes

Standby mode
Green lamp blinks

(Pull the trigger twice to resume.)

When left unused for 15 minutes

Shuts down
Green lamp turns off


(To resume, press and hold the power button, then pull the trigger twice.)

Four adjustable opening angles to suit different branch sizes for enhanced efficiency



Angle adjustment button

Press and hold this button to adjust the angle with the upper blade closed.

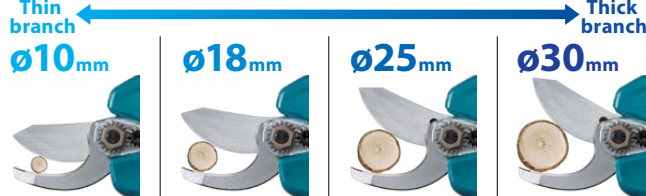

Blade oil can be applied from the outside without disassembly.

Cutting depth adjustment (5 steps)



Cutting depth can be adjusted after blade replacement.

Close the upper blade and hold the angle adjustment button for more than 3 seconds.

DUP181Z Cordless Pruning Shears

New

Four adjustable opening angles to suit different branch sizes

Li-ion Ah 6.0 5.0 3.0 1.5

Capacity	Max cutting: 30 mm (1-3/16")
Vibration level	2.5 m/s ² or less
Sound pressure level	70 dB (A) or less
Dimensions (L x W x H)	w/ BL1820B: 300 x 75 x 113 mm (11-3/4 x 2-15/16 x 4-7/16")
Net weight	0.76 kg (1.7 lbs.)



18V



Blade cover, Hex wrench, Socket wrench, Z: Battery and Charger are sold separately

UP100DZ Cordless Pruning Shears

Shear blade control is interlocked with Trigger for easier control of the blade

Li-ion Ah 5.0 4.0 2.0 1.5

Capacity	Max cutting: 25 mm (1")
Vibration level	2.5 m/s ² or less
Sound pressure level	70 dB(A) or less
Dimensions (L x W x H)	w/o Battery: 259 x 53 x 98 mm (10-1/4 x 2-1/16 x 3-7/8") w/ BL1016/BL1021B: 285 x 64 x 98 mm (11-1/4 x 2-1/2 x 3-7/8") w/ BL1041B: 308 x 64 x 98 mm (12-1/8 x 2-1/2 x 3-7/8")
Net weight	0.89 - 1.1 kg (2.0 - 2.4 lbs.)



12Vmax



Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger, DZ: Battery and Charger are sold separately

DUS158Z 15L Cordless Garden Sprayer

WetGuard; Excellent water-resistant performance

Li-ion Ah 6.0 5.0 3.0 1.5

Max Pressure	0.5 MPa
Chemical tank	15 L
Hose Length	1.7 m
Continuous Use (min.)	Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180
Dimensions (L x W x H)	325 x 237 x 517 mm (12-3/4 x 9-3/8 x 20-3/8")
Net weight	4.6 kg (10.1 lbs.)



18V



Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger, Z: Battery and Charger are sold separately

DUS108Z 10L Cordless Garden Sprayer

WetGuard; Excellent water-resistant performance

Li-ion Ah 6.0 5.0 3.0 1.5

Max Pressure	0.5 MPa
Chemical tank	10 L
Hose Length	1.7 m
Continuous Use (min.)	Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180
Dimensions (L x W x H)	325 x 237 x 439 mm (12-3/4 x 9-3/8 x 17-1/4")
Net weight	4.6 kg (10.1 lbs.)



18V



Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger, Z: Battery and Charger are sold separately

DUS054Z 5L Cordless Garden Sprayer

Two head nozzles for a wide range of spray

Li-ion Ah 6.0 5.0 3.0 1.5

Max Pressure	0.3 MPa (3 kgf/cm ²)
Chemical tank	5 L
Hose Length	1.7 m
Continuous Use (min.)	Spray Single: w/ BL1860B: 530 min
Dimensions (L x W x H)	340 x 183 x 360 mm (13-3/8 x 7-1/4 x 14-1/8")
Net weight	2.1 kg (4.6 lbs.)



18V



Shoulder Harness, Holder, Battery, Charger, Z: Battery and Charger are sold separately

US053DZ 5L Cordless Garden Sprayer

12Vmax CXT Li-Ion Cordless 5 L Garden Sprayer

Li-ion Ah 4.0 2.0 1.5



Max Pressure	0.3 MPa (3 kgf/cm ²)
Chemical tank	5L
Hose Length	1.7 m
Continuous Use (min.)	Spray Single: w/ BL1041B : 250
Dimensions (L x W x H)	340 x 183 x 335 mm (13-3/8 x 7-1/4 x 13-1/4")
Net weight	2.0 kg

12Vmax



Shoulder Harness, Holder, Battery, Charger, DZ: Battery and Charger are sold separately

DVF104Z 10L Cordless Garden Sprayer

Environmentally-friendly with no emission and extremely low noise

Li-ion Ah 6.0 5.0 3.0 1.5



Max pressure	0.3Mpa (3kgf/cm ²)
Chemical tank	10L
Dimensions (L x W x H)	315x225x415mm (12-3/8"x8-7/8"x16-3/8")
Net weight	3.8 - 4.1kg (8.4 - 9.1lbs)

18V



Y-shaped Double Nozzle, Wide Angle Nozzle, Spray Pipe Holder, Shoulder Harness, Z: Battery and Charger are sold separately

PM001GZ01 Cordless Backpack Mist Blower

40Vmax XGT BL Cordless Backpack Mist Blower

Li-ion Ah 8.0 5.0 4.0



Chemical tank capacity	15.0L (507 oz)
Max air volume	High/Med./Low: 14.3/11.0/9.0 m ³ /min
Max air velocity	High/Med./Low: 64.0/52.0/42.0 m/s
Avg. air velocity	High/Med./Low: 53.0/43.0/34.0 m/s
Vibration level	84.5 dB (A)
Sound power level	103.3 dB (A)
Continuous Use (min.)	w/ BL4080F x2 High: 20
Dimensions (L x W x H)	w/o Nozzle: 320 x 600 x 690 mm (12-5/8 x 23-5/8 x 27-1/4")
Net weight	13.2 - 15.7 kg (29.1 - 34.6 lbs.)

40Vmax



Diffusion cover, Wrench, Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

Photo: PM001G

Switch Interlocking Valve

The opening/closing operation of the solution supply valve is interlocked with the switch trigger to suppress dripping of solution.

Average particle size

High spraying speed mode

50/150 μm

ULV nozzle/Standard nozzle

Max spray distance: 14m

Solution tank capacity
15L

DG001GZ02 Cordless Earth Auger

Lightweight design for reduced operator fatigue

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Dimensions (L x W x H)	836 x 605 x 199 mm (33 x 23-3/4 x 7-7/8")
Net weight	7.2 - 8.1 kg (15.9 - 17.9 lbs.)

40Vmax



Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately

DDG460ZX4 Cordless Earth Auger

Battery powered and powerful

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 350
Max Fastening Torque	High: 48 N·m (430 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
Net weight	7.3 - 8.2 kg (16.1 - 18.1 lbs.)

18V x2



Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately

HW001GZ Cordless High Pressure Washer

Powered by 40Vmax XGT Li-Ion battery (two in parallel or one)

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Max Pressure	11.5 MPa
Max Flow Rate	7.0 L/min
Pump Speed (RPM)	Mode 1/Mode 2/Mode 3: 1,870/2,580/3,350 w
Continuous use (approx) on fully charged batteries	BL4050F: Mode 1: 60 min Mode 2: 30 min Mode 3: 18 min
Max Feed Temperature	40 °C
High Pressure Hose Length	5 m (16 ft.)
Dimensions (L x W x H)	344x383x520 mm
Net weight	8.5 kg (18.7 lbs.)

40Vmax



Trigger gun set, High pressure hose, Strainer assembly set, Absorption connector, Cleaner pin, Battery, Charger Z: Battery and Charger are sold separately

DHW080ZK Cordless High Pressure Washer

18V X2 LXT BL Cordless 8 MPa High Pressure Washer

Li-ion Ah 6.0 5.0 3.0 1.5




Max Pressure	8.0 MPa (N/A bars)
Max Flow Rate	380 L/h (6.3 L/min)
Pump Speed (RPM)	High / Low: 3,450 / 2,390
Max Feed Temperature	40 °C (N/A °F)
Max Suction Height (L x W x H)	1 m (3.3 ft.)
High Pressure Hose Length	5 m (16 ft.)
Sound Power Level	70.9 dB(A)
Dimensions (L x W x H)	438x218x269 mm (17-1/4"x8-5/8"x10-5/8")
Net weight	7.1 - 7.7 kg (15.6 - 17.0 lbs.)

18V x2



Trigger Gun, High Pressure Hose 5 m, Suction Hose, Cleaner Pin, Storage Box, Variable nozzle, Connector, One touch joint, Battery, Charger, Z: Battery and Charger are sold separately

Sufficient cleaning power for light-duty tasks

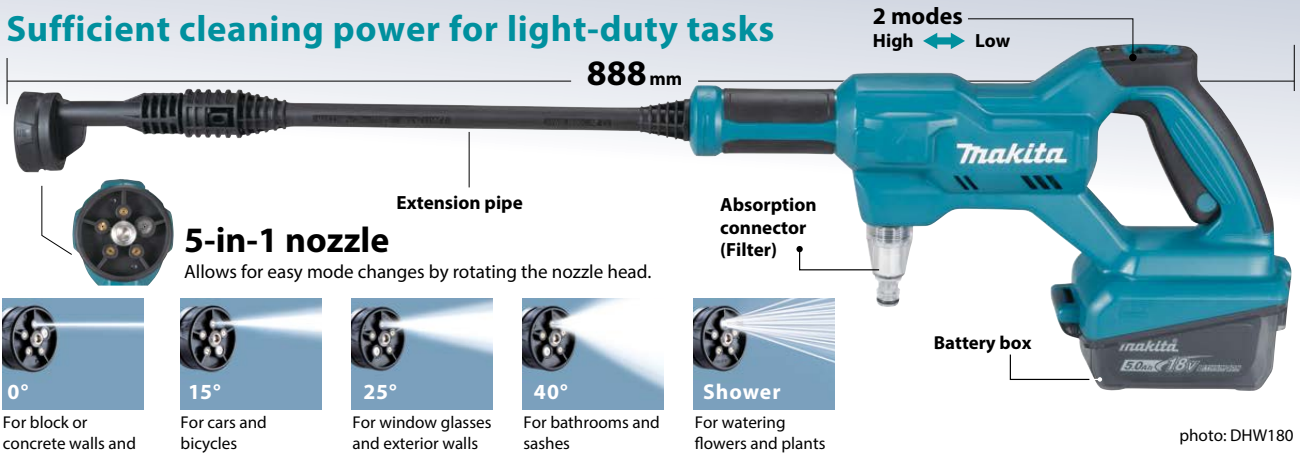

Regular pressure
2.4 MPa
In High mode, when connected to water supply

Continuous use
High / Low mode
18/50 min
Battery: w/ BL1830B on a full battery charge Self-priming

DHW180Z01 Cordless Pressure Washer

18V LXT Cordless 2.4 MPa Pressure Washer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Regular pressure	Self-priming, High / Low: 2.0 / 0.8 Mpa Connection to water supply, High / Low: 2.4 / 0.8 Mpa
Regular flow rate	Self-priming, High / Low: 2.5 / 1.5 L/min Connection to water supply, High / Low: 2.5 / 1.5 L/min
Max Flow Rate	w/o Nozzle: 5.3 L/min
Continuous use	High, Low: 18, 50min.
Max suction height	2.0m (6.7 ft)
Supplied hose length	6m (19.7 ft)
Dimensions (L x W x H)	419 x 99 x 239 mm (16-1/2 x 3-7/8 x 9-3/8")
Net weight	2.3 - 2.7 kg (5.1 - 6.0 lbs.)

18V **LXT XPT**

Hose, Absorption connector, Nozzle, Extension, Cleaner pin, Battery, Charger, Z: Battery and Charger are sold separately

Three types of water supply methods

Adaptable to various usage environments



Water faucet

When water volume is needed (with a hose clamp*)

*Commercially available

Self-priming

When a water source is distant

- Max suction height: 2m
- Minimum water level of 25 mm is required

Plastic bottle

When a water source is not available

Plastic bottle adapter

Optional accessory

HW102 High Pressure Washer

Lightweight and compact power washer for home use



Continuous Rating Input	1,300W
Max Pressure	100bar (1,450 PSI)
Max Flow Rate	360 L/hr
Motor Type	Universal
Sound Power Level	94dB(A)
Max Input Temperature	50°C
High Pressure Hose Length	5m
Net Weight	5.8kg (5.0lbs)



HW1300 High Pressure Washer

High Pressure Washer with Self-Priming Function

203 mm



Continuous Rating Input	1,800W
Max Pressure	13MPa
Max Flow Rate	450 L/hr
Max Feed Temperature	40 °C (104 °F)
Sound Pressure Level	76 dB(A)
High Pressure Hose Length	10m
Dimensions (L x W x H)	292x358x830 mm (11-1/2"x14-1/8"x32-3/4")
Net Weight	12.7 kg (28.0 lbs.)
Cord Length	5m



Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10m, Water Hose Connector, Foam Nozzle, Connector

HW132 High Pressure Washer

Steel reinforced spray gun



Continuous rating input	2,100W
Max Pressure	14 MPa (140 bar, 2,030 PSI)
Net weight	18.8 kg (41.4 lbs)



HW151 High Pressure Washer

Compact design, large operating range and efficient cleaning performance



Continuous Rating Input	2,500W
Max Pressure	15MPa (2,175 PSI)
Max Flow Rate	500 L/hr
Motor Type	Induction
Sound Power Level	88dB(A)
Max Input Temperature	50°C
High Pressure Hose Length	10m(32.8ft)
Net Weight	26.9kg (23.3lbs)



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

Earth auger drill bit with adapter D shank


Cleaning Equipment



Suitable for drilling sandy soil and soil which contains grassroots and pebbles. Used for topdressing · tree planting to fruit trees and also for drilling prepared hole which needs for hammering in various types of pile.


Earth auger drill bit

Diameter	Length	Working Length	Part No.
ø100 mm	800 mm	550 mm	E-07294
ø150 mm			E-07303
ø200 mm			E-07319

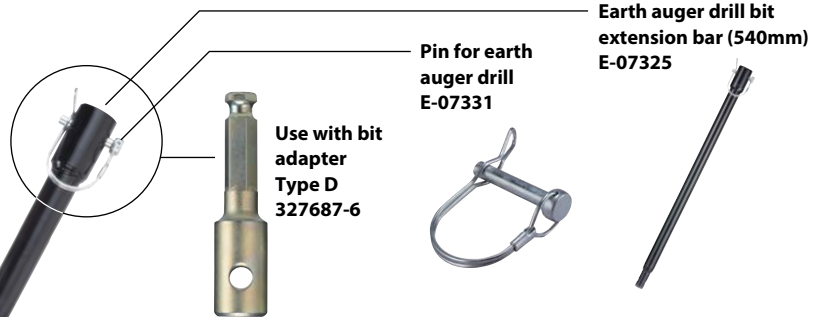

Compared to our conventional product which only has one spiral groove, this new product has two spiral groove which make drilling more stable. It also leads to 10% increase on drilling speed compared to the conventional product.

Two different types of cutting edge shape (flat cutter and sharp cutter) makes it possible to deal with various soil.

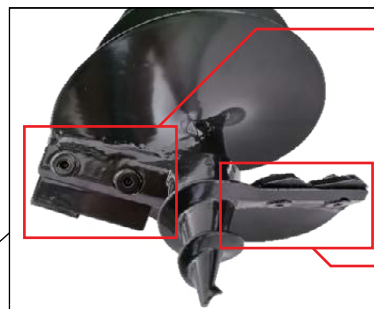

Flat cutter



Flat cutter is suitable for soil with grassroots



Sharp cutter



Sharp cutter is suitable for soil with pebbles.



Blade for earth auger drill bit (Changing cutter blade set)














Diameter	Part No.
For 100 mm	E-07630
For 150 mm	E-07646
For 200 mm	E-07652


*Diameter 200mm is used only for sandy soil.



Outdoor Power Equipment

General Equipment

Blade selection guide

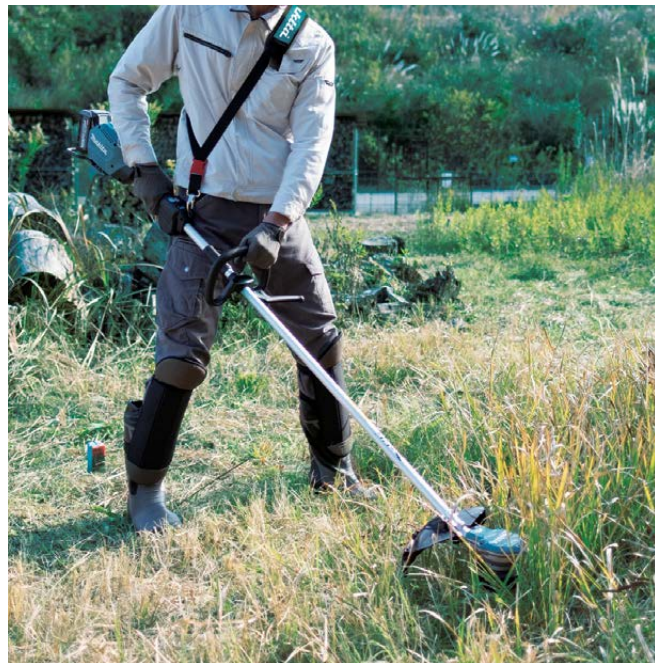Blade type / Image				
		Short and soft grass	Tall and hard grass	Bush including tree beginning to grow
Nylon cord		←→		
Plastic blade		←→		
Metal blade		←→		
		←→		
			←→	
Brushcutter blade			←→	
Shredder blade			←→	
Saw blade				←→
Chisel blade				←→
T.C.T. saw blade		←→		






Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
80-tooth blade					
	for bushes and thin tree trunks Not available in some countries due to local regulation	255mm / 80	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14168
TCT Saw blade					
	for gnarled bushes and thin tree trunks	230mm / 36	1.25mm	EBH252U, EBH253U, EBH340U/R, EBH341U/L, EBH341R, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650L/U, EM2651L/U, EM2653LH, EM2654LH, EM4340L	D-65981
	Not available in some countries due to local regulation	250mm / 40	1.25mm	EBH340U/R, EBH341L/U/R, EM2901LH/UH, EM2904LH, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	A-48337

Edger blade

Blade Dia. / No. of Teeth	Thickness	Model No.	Part No.
203mm / 2	2.5mm	EE2650H, EE400MP	196745-7 / 1916D6-4 (new)

Brushcutter blades

Hole Dia.: 25.4mm

Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
2-tooth blade					
	for tall grass and scrub	230mm / 2	2.0mm	EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	D-66058
4-tooth blade					
	for tall grass and scrub	230mm / 4	1.8mm	DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14118
		230mm / 4	1.8mm	DUR365U, DUR368A/L, DUR369A/L, UR101C, UR201C, EM401MP, EM402MP	D-66008
8-tooth blade					
	for thick grass and scrub	200mm / 8	1.4mm	DUR194	191Y44-2
		255mm / 8	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14146

String trimmer head




(for grass, light weeds)
* with adapter (Poly bag with header)

Quick loading Trimmer Head (UN-74L, UN-72L, 96-M8L/R, 96-M10L, 121-M10L)

Nylon cord can be feeded without opening the head



Up to 58% less feeding time!


Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.
Quick loading Bump & Feed							
	96-M8L	4"	M8x1.25LH	DUR142L, DUR142U, DUR143U, DUR182L, DUR182U, DUR183L, DUR183U, DUR187L, DUR187U, DUR188L, DUR188U	2.0mm x 4m	Carton box	191D91-7
	96-M8R		M8x1.25RH	DUR189, DUR364	2.0mm x 4m	Carton box	191D92-5
	96-M10L	4"	M10x1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR201C, UR202C, DUR365, DUR366, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EM408MP, EM409MP, UR001G, UR002G, UR003G, UR004G, UR101C	2.0mm x 4m	Carton box	191D89-4
				DUR369A, DUR369L, DUR369N, EBH252L, EBH252U, EBH253L, EBH253U, EM2510L, EM2511L, EM2650U, EM2651L, EM2651U, EM2653L, EM2654L, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, UR101C, UR201C, UR202C	2.4mm x 3m	Carton box	191D90-9
	121-M10L	5"	M10x1.25LH	EBH341L, EBH341U, EM4350L, EM4350R, EM4350U, EM4351U, MS335C, RBC411, RBC412U, RBC413U, RBC414U, UR012G, UR013G	2.4mm x 4m	Carton box	191D93-3
	98-M10L	4"	M10X1.25LH	DUR190L, DUR190U, DUR192L, DUR368A, DUR368L, DUR369L, DUR369N, DUX60, UR002G, UR003G, UR006G, UR007G, UR008G, UR012G, UR013G, UR016G, UR017G, UR101C, UR201C, UR202C	3m	Carton box	1915D7-6
	Z5L, 105-M10L	5"	M10X1.25LH	UR012G, UR013G	3m	Carton box	199884-2
	121-M10L	5"	M10X1.25LH	UR013G	2m (X2)	Carton box	1911Y2-9

Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.	
Bump & Feed (Flat type)								
	-	4"	M10x1.25LH	Grass Trimmers	2.0mm x 3m	Carton box	1914R8-6	
					2.4mm x 3m		1914R6-0	
Bump & Feed								
	76-M8R	3"	M8x1.25RH	UR100D	1.65mm x 8m	Poly bag with header	198854-8	
	95-M10L	4"	M10x1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, UR002G, UR003G, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, EM408MP, EM409MP	2.0mm x 3m	Poly bag with header	198892-0	
2.4mm x 3m					Poly bag with header	197804-0		
Bump & Feed								
	B & F ECO 4R	4" Low profile	M8x1.25RH	DUR189, DUR364L	2.0mm x 3m	Poly bag with header	197297-1	
	B & F ECO 4L	4" Low profile	M10x1.25LH	DUR192L, DUR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, UR002G, UR003G, UR101C, UR201C, UR202C, EM408MP, EM409MP		Poly bag with header	197296-3	
	B & F Z5L	5"	M10x1.25LH	EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Blister pack	B-05131	
Automatic feed and Bump & Feed								
	Line will be feeded about 3cm, in either one of the following cases -Head rotation are reached at 8,500rpm. -Bottom of the head is bumped on the ground when it is spinning.	Ultra Auto 4R	4"	M8x1.25RH	ER2550L, ER2650L, ER2600L, ER400MP	2.4mm x 3m	Carton box	B-03006
		Ultra Auto 4L	4"	M8&10x1.25 LH	DUR187U/L, DU188U/L, EM2500U/L, EM2600U/L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Carton box	*B-02945







Cordless string trimmer

Model No.	Spindle Size	Receive Washer		Grass Guard for Receive Washer	Model No.	Spindle Size	Receive Washer		Grass Guard for Receive Washer
		Size (mm)	Part No.				Size (mm)	Part No.	
DUR184L	M8x1.25RH	36.5	326683-1 144512-4	346857-8	DUR364L	M8x1.25RH	44	319245-2	346857-8
DUR187L	M10x1.25LH	36.5	144512-4	346857-8	DUR365U, DUR366L	M10x1.25LH	42	140L84-9	-
DUR189	M8x1.25RH	36.5	144512-4	346857-8	DUR368L	M8x1.25RH	-	140L84-9	-
DUR192L, DUR190	M10X1.25LH	36.5	-	346857-8	UR202C	M10X1.25LH	65	140N88-3	-

Line Character

Shape	Sharpness	Energy Saving	Quietness
 Four-leaf	A	AA	AA

Color chart

Dia.	Color / Shape	Light duty		Heavy duty	
		Short grass		Tall grass	
		Low density	High density	Low density	High density
1.3mm		↔			
1.6mm - 1.65mm		↔↔			
2.0mm			↔↔↔		
2.4mm				↔↔↔↔	
2.7mm					↔↔↔↔↔
3.0mm					↔↔↔↔↔↔



Other Nylon cord (round, natural)



Size	Part No.
1.65mmx15m	DA0000003
2.4mmx5m	B-01971
3.0mmx4m	B-07375


Four-Leaf Line

Low noise and energy saving





Four-leaf shape makes small vortex and realizes low noise and energy saving feature thanks to less air resistance.

The amount of cutting per 1 charge






Noise




Color / Shape	Layer	Dia. (mm)	Length(m)	Part No.
	Single	1.65	15	E-01731
	Single	2	15	E-01769
	Single	2	30	E-01775
	Single	2	310	E-01781
	Single	2.4	15	198501-1 E-01797
	Single	2.4	30	198502-9 E-01806
	Single	2.4	225	E-01812
	Single	2.7	15	E-01828
	Single	2.7	30	E-01834
	Single	2.7	180	E-01840




Protection guard

Shape	Type	Model No.	Description	Part No.
Protector				
	Universal	DUR369A, DUR369L, UR101C, UR201C	With protector extension	191B54-1
for Cutting blade				
	Exclusive	EBH340R	-	XNR0000302
for Trimmer head				
	Exclusive	UR100D	With cord/line cutter	135950-1
		DUR189	Without cord/line cutter	456651-1
		EM405MP, EM406MP, UR101C, UR201C, UR202C, DUR369A, DUR369L, DUR369N	Narrow type / Without cord/line cutter	457273-0

Protection guard- Plastic blade set

	Model No.	Plastic Blade Set			Replacement Plastic Blade	
		Arbore Size	Cutting Width	Part No.	Per Pkg.	Part No.
	UR100D	M8x1.25RH	230mm	198848-3	5	198850-6

Protection guard for brushcutter

Still Photo	Name	Related Models	Part No.
	Protector U 330 set	UR016G, UR017G	1911X4-8
	Protector set	UR003G	197294-7
	Protector N 430 set MG	DUR369A, DUR369L, DUR369N, UR006G, UR007G, UR008G, UR101C, UR201C, UR202C	191B55-9

Spool assembly



Model No.	Part No.
UR3000	DA00000001
DUR181	195858-1
DUR193	191Y39-5

Shoulder strap assembly

Shape	Model No.	Part No.
Singlet		
	DUN500W, DUN501W, DUR181, DUR184L, DUR187L, DUR188L, DUR189, DUR190L, DUR191L, DUR364L, DUR368A, DUR368L, UR100D, UR180D, DUR366L, DUX60L, EBH252L, EBH253L, EBH341L, EM2510LH, EM2511LH, EM2650LH, EM2651LH, EM2653LH, EM2654LH, EM3400L, EN4950H, EN4951SH, EY2650H, EX2650LH, RBC411U, RBC412U	125516-5
	DUR192L, DUR194, UR002G, UR003G; UR006G, UR007G, DUR193, DUR194, UX18D	127508-0
Comfort		
	DUR369A, EBH252U, EBH253U, EBH341U, EM2650UH, EM2651UH, EM4350UH, RBC411U, RBC412U, RBC413U, RBC414U, UR002G	122906-3

String trimmer harness for PDC01 & PDC1200



Item	Part No.
B	197243-4

Harness



Model No.	Part No.
DUA250, DUA251, DUA300, DUA301, UA001G, UA002G, UA003G, UA004G	191K37-5

Attachments for loop handle brushcutter

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Shape	Model No.	Part No.
-------	-----------	----------

Hedge trimmer

Blade length: 490mm



EM2650LH, EM2651LH, EM2653LH, EN2654LH	198579-4
----------------------------------------	----------

Pole saw

Bar length: 25cm (10")
Saw chain: 91VXL-39links
Motor Mount:A218



EM2650LH, EM2651LH.	A-89539
---------------------	---------

Coffee harvester



EM2651LH	B-80210
----------	---------

Attachments for back pack brushcutter


Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Shape	Model No.	Part No.
-------	-----------	----------

Coffee harvester



EBH340R, EBH341R	B-80226
------------------	---------

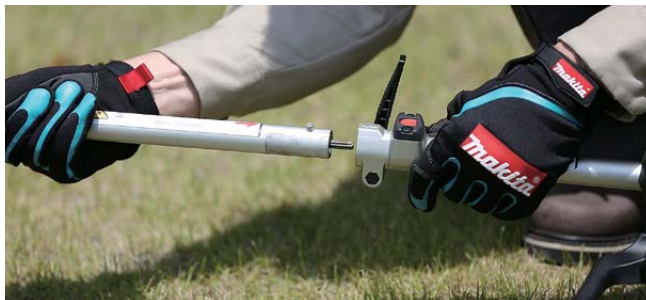

Multi-tool attachments

Shape	Model No.	Part No.
-------	-----------	----------

Grass trimmer

Spindle size:
M10 x 1.25LH



DUX18, DUX60, EX2650LH, UX01G	EM408MP 191N35-7 EM409MP 191N48-8
-------------------------------	--------------------------------------------

String trimmer

Cutting width: 410mm
Spindle size:
M8 x 1.25RH



EX2650LH	ER400MP 195530-5
----------	---------------------

Rotary scissors

Blade size: 230mm
Spindle size:
M8 x 1.25 LH



DUX60, EX2650LH	EM407MP 191M60-2
-----------------	---------------------

Blower

Shape	Model No.	Part No.
-------	-----------	----------



DUX18, DUX60, EX2650LH, UX01G	UB401MP 191P78-1
-------------------------------	---------------------

Pole saw

*Except for European, Australian, New Zealand, Chinese & Korean markets.

Shape	Model No.	Part No.
-------	-----------	----------

Bar length: 25cm (10") (EY401MP), 30cm (12") (EY403MP)
Saw chain: 91VXL-39links
Motor Mount:A218



DUX18, DUX60, EX2650LH, UX01G	EY403MP 191T41-8
----------------------------------	---------------------

Pole hedge trimmer

Shape	Model No.	Part No.
-------	-----------	----------

Angle adjustment



DUX18, DUX60, EX2650LH, UX01G	EN401MP 196341-1
----------------------------------	---------------------

Straight



DUX18, DUX60, EX2650LH, UX01G	EN410MP 197742-6
----------------------------------	---------------------

Ground trimmer.25LH



DUX18, DUX60, EX2650LH, UX01G	EN420MP 198061-3
----------------------------------	---------------------

Ground Trimmer

DUX18, DUX60, UX01G	EN424MP 1913D3-2
------------------------	---------------------

Cultivator

Cultivating width: 160mm



DUX18, DUX60, EX2650LH, UX01G	KR400MP 195712-9 / 195716-1
----------------------------------	--------------------------------

Cultivator

Cultivating width: 220mm

* Rotor LR set:
P/N:199204-0

DUX18, DUX60, EX2650LH, UX01G	KR401MP 199185-8
----------------------------------	---------------------

Shape

Model No.

Part No.

Power brush* Brush wheel (1pc)
P/N: XNR0000548

DUX18, DUX60, EX2650LH, UX01G	BR400MP 199323-2
----------------------------------	---------------------

Power sweep* Sweeper wheel (1pc):
P/N: XNR0000549

DUX18, DUX60, EX2650LH, UX01G	SW400MP 199344-4
----------------------------------	---------------------

Coffee harvester

DUX18, DUX60, EX2650LH, UX01G	EJ400MP 195726-8
----------------------------------	---------------------

Edger attachment

DUX18, DUX60, EX2650LH, UX01G	EE400MP 196750-4
----------------------------------	---------------------

Pump attachment

DUX18, DUX60, UX01G	PF400MP A-75384
------------------------	--------------------

Shaft extension attachment

S For Pole saw, Pole hedge trimmer and Coffee harvester



DUX18, DUX60, EX2650LH, UX01G	LE400MP 191E23-0
----------------------------------	---------------------

Weeding attachment

DUX18, DUX60, UX01G	WA400MP 1913T9-2
------------------------	---------------------




Saw Chain and Guide Bar



A Guide Bar Length
Guide bar's length is represented by cutting length, which is different from its whole length.




B Drive Link
The length of saw chain is determined by counting the number of drive links in the saw chain.



C Chain Pitch
Chain pitch is the size of the chain and it is defined by the distance between any three consecutive rivets divided by two. Pitch is important because the drive sprocket must be the same pitch as the chain.



D Gauge
Chain Gauge is thickness of drive link which will fit into the guide bar groove. Chain gauge must be the same as guide bar gauge.



E Depth Gauge
Depth gauge determines how deep the cutting teeth gets into the wood. Cutting depth can be checked by the gap between top of cutter and depth gauge.



General Saw Chain Character

Chain Pitch	Gauge			
	.043" (1.1mm)	.050" (1.3mm)	.058" (1.5mm)	.063" (1.6mm)
3/16"	M01			
1/4"		25AP		
.325"LP				
3/8"LP	M41 90PX	M43 91PX 91VXL		
.325" narrow kerf		95VPX 95TXL		
.325"		20BPX	21BPX 21LPX	22BPX 22LPX
3/8"		72V	73DPX 73LGPX 73LPX	
.404"				27X

Guide Bar Type

Sprocket Nose Bars

Sprocket nose bars have a rotating sprocket mounted at the tip of the bar. As the chain moves along the bar, the sprocket teeth carry the chain around the tip smoothly with less friction.



High durability sprocket nose bar

Longer nose life thanks to larger nose sprocket than normal sprocket bars. Multiple rivets can be found on bar surface.



Solid Carving Bars

Carving bars are made of high-quality steel and high wear resistant stellite has been welded onto the tip. Bar tip is designed to have small radius for precision cutting. The carving bars are made for especially pruning and carving.



Guide Bar Maintenance

Chain Tension

Check the chain tension before use. The saw chain may become loose after many hours of use.




File Bar Edge

File bar edge with a flat file to keep it 90° once a week.




Clean Guide Bar

Clean out chips and sawdust every time when you sharpen or replace saw chain.



Bar Nose Grease


Lubricate a whole sprocket regularly so that the saw chain can rotate with less friction.



Chain Saws

Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket

Cutter type: CC: Chamfer chisel, SC: Semi chisel, MC : Micro chisel, FC: Full chisel



Model No.	Guide Bar				Saw Chain						Bar Cover	Drive sprocket	
	Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Part No.	Type	Part No.
Pole Saws													
DUA200	20cm/8"	A041	Sprocket nose bar	1914S3-3	38	1.1mm/.043"	.325"LP	80TXL	MC	1914S1-7	413G28-5	.325"LP 7T	
EY402MP EY403MP	25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	452093-7 / 458501-6	3/8"LP 6T	226992-7
DUA250, DUA251 DUA300, DUA301 UA001G, UA002G UA003G, UA004G	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"LP	90PX	CC	191H01-8	419288-5 / 413G23-5	3/8"LP 6T	226992-7
	25cm/10"	A041	Sprocket nose bar	191G22-4	40	1.3mm/.050"	3/8"LP	91PX	CC	191H08-4	452093-7 / 458501-6	3/8"LP 6T	226992-7
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	3/8"LP 6T	226992-7
Cordless Pruning Saw													
DUC101, UC100D	10cm/4"	F002	without sprocket	1910W0-3	26	1.1mm/.043"	.325"LP	80TXL	MC	1910V6-4	413M40-1	.325"LP 7T	1911W5-9
DUC150, UC029G	15cm/6"	F002	without sprocket	1912F1-4	32	1.1mm/.043"	.325"LP	80TXL	MC	1912E8-3	413T67-3	.325"LP 7T	1911W5-9
Cordless Chain Saws													
DUC122	11.5cm/4-1/2"	-	without sprocket	158476-6	42	1.3mm/.050"	1/4"	25AP	MC	191G95-7	416311-7	1/4" 9T	221527-9
UC021G, UC022G UC023G, UC024G UC025G, UC026G	30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/.043"	.325"LP	80TXL	MC	191T90-5	419288-5 / 413G23-5	Sprocket .325" LP 7 tooth	191V91-5
	35cm/14"	A041	Sprocket nose bar	191T87-4	59	1.1mm/.043"	.325"LP	80TXL	MC	191T91-3	419288-5 / 413G23-5	Sprocket .325" LP 7 tooth	191V91-5
	40cm/16"	A041	Sprocket nose bar	191T88-2	64	1.1mm/.043"	.325"LP	80TXL	MC	191T92-1	419242-9 / 413G21-9	Sprocket .325" LP 7 tooth	191V91-5
DUC256 DUC306 DUC356 DUC406 DUC256C	25cm/10"	-	Solid carving bar	1911A1-3	60	1.3mm/.050"	1/4"	25AP	MC	191G96-5	452093-7 / 458501-6	Sprocket 1/4" 9 tooth	198259-2
	25cm/10"	A041	Sprocket nose bar	191T85-8	46	1.1mm/.043"	.325"LP	80TXL	MC	191T89-0	452093-7 / 458501-6	Sprocket .325" LP 7 tooth	1916N6-4
	30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/.043"	.325"LP	80TXL	MC	191T90-5	419288-5 / 413G23-5	Sprocket .325" LP 7 tooth	1911W5-9
	35cm/14"	A041	Sprocket nose bar	191T87-4	59	1.1mm/.043"	.325"LP	80TXL	MC	191T91-3	419288-5 / 413G23-5	Sprocket .325" LP 7 tooth	1911W5-9
	40cm/16"	A041	Sprocket nose bar	191T88-2	64	1.1mm/.043"	.325"LP	80TXL	MC	191T92-1	419242-9 / 413G21-9	Sprocket .325" LP 7 tooth	1911W5-9
	25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	452093-7 / 458501-6	Sprocket 3/8" LP 6 tooth	199063-2
	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"LP	90PX	CC	191H01-8	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G16-9	52	1.1mm/.043"	3/8"LP	90PX	CC	191H02-6	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	40cm/16"	A041	Sprocket nose bar	191G17-7	56	1.1mm/.043"	3/8"LP	90PX	CC	191H03-4	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2
	25cm/10"	A041	Sprocket nose bar	191G22-4	40	1.3mm/.050"	3/8"LP	91PX	CC	191H08-4	452093-7 / 458501-6	Sprocket 3/8" LP 6 tooth	199063-2
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G24-0	52	1.3mm/.050"	3/8"LP	91PX	CC	191H11-5	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
40cm/16"	A041	Sprocket nose bar	191G25-8	56	1.3mm/.050"	3/8"LP	91PX	CC	191H12-3	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2	
DUC258	25cm/10"	A041	Sprocket nose bar	191T85-8	46	1.1mm/.043"	.325"LP	80TXL	MC	191T89-0	413G28-5 / 458501-6	Sprocket .325" LP 7 tooth	1916N6-4
	20cm/8"	A041	Sprocket nose bar	191G13-5	33	1.1mm/.043"	3/8"LP	90PX	CC	191G99-9	413G28-5 / 458501-6	Sprocket 3/8" LP 6 tooth	1916N7-2
	25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	413G28-5 / 458501-6	Sprocket 3/8" LP 6 tooth	1916N7-2
DUC307 DUC357 DUC407	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"LP	90PX	CC	191H01-8	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G16-9	52	1.1mm/.043"	3/8"LP	90PX	CC	191H02-6	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	40cm/16"	A041	Sprocket nose bar	191G17-7	56	1.1mm/.043"	3/8"LP	90PX	CC	191H03-4	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G24-0	52	1.3mm/.050"	3/8"LP	91PX	CC	191H11-5	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
40cm/16"	A041	Sprocket nose bar	191G25-8	56	1.3mm/.050"	3/8"LP	91PX	CC	191H12-3	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2	
DUC303 DUC353 DUC400 DUC305 DUC355 DUC405	25cm/10"	-	Solid carving bar	1911A1-3	60	1.3mm/.050"	1/4"	25AP	MC	191G96-5	452093-7 / 458501-6	Sprocket 1/4" 9 tooth	198259-2
	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"LP	90PX	CC	191H01-8	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G16-9	52	1.1mm/.043"	3/8"LP	90PX	CC	191H02-6	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	40cm/16"	A041	Sprocket nose bar	191G17-7	56	1.1mm/.043"	3/8"LP	90PX	CC	191H03-4	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	35cm/14"	A041	Sprocket nose bar	191G24-0	52	1.3mm/.050"	3/8"LP	91PX	CC	191H11-5	419288-5 / 413G23-5	Sprocket 3/8" LP 6 tooth	199063-2
	40cm/16"	A041	Sprocket nose bar	191G25-8	56	1.3mm/.050"	3/8"LP	91PX	CC	191H12-3	419242-9 / 413G21-9	Sprocket 3/8" LP 6 tooth	199063-2
UC030G	40cm/16"	D025	Sprocket nose bar	1915Y7-3	67	1.3mm/.050"	.325"	95TXL	MC	1916A1-3	4133L9-9	Sprocket .325" 7 tooth	1916A5-5
	45cm/18"	D025	Sprocket nose bar	1915Y8-1	74	1.3mm/.050"	.325"	95TXL	MC	1916A2-1	4133H6-7	Sprocket .325" 7 tooth	1916A5-5
	50cm/20"	D025	Sprocket nose bar	1915Y9-9	82	1.3mm/.050"	.325"	95TXL	MC	1916A3-9	4133H6-7	Sprocket .325" 7 tooth	1916A5-5
	50cm/20"	D025	Sprocket nose bar	1916A0-5	82	1.6mm/.063"	.325"	22BPX	MC	1916A4-7	4133H6-7	Sprocket .325" 7 tooth	1916A5-5
UC031G	25cm/10"	A041	Sprocket nose bar	191T85-8	46	1.1mm/.043"	.325"	80TXL	MC	191T89-0	413X66-9	Sprocket .325" 7 tooth	1916N6-4
	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"	90PX	CC	191H01-8	413G23-5	Sprocket 3/8" LP 6 tooth	1916N7-2

Model No.	Guide Bar					Saw Chain					Bar Cover	Drive sprocket	
	Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Part No.	Type	Part No.
UC002G UC003G UC004G UC005G UC006G UC007G	25cm/10"	-	Solid carving bar	1911A1-3	60	1.3mm/.050"	1/4"	25AP	MC	191G96-5	452093-7 / 458501-6	Sprocket 1/4" 9T	191V92-3
	25cm/10"	A041	Sprocket nose bar	191T85-8	46	1.1mm/.043"	.325" LP	80TXL	MC	191T89-0	452093-7 / 458501-6	Sprocket .325" LP 7 tooth	191V91-5
	30cm/12"	A041		191T86-6	51					191T90-5	419288-5 / 413G23-5		
	35cm/14"	A041		191T87-4	59					191T91-3	419288-5 / 413G23-5		
	25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	452093-7 / 458501-6	Sprocket 3/8"LP 6 tooth	191V90-7
	30cm/12"	A041		191G15-1	46					191H01-8	419288-5 / 413G23-5		
	35cm/14"	A041		191G16-9	52					191H02-6	419288-5 / 413G23-5		
	25cm/10"	A041	Sprocket nose bar	191G22-4	40	1.3mm/.050"	3/8"LP	91PX	CC	191H08-4	452093-7 / 458501-6	Sprocket 3/8"LP 6 tooth	191V90-7
	30cm/12"	A041		191G23-2	46					191H10-7	419288-5 / 413G23-5		
35cm/14"	A041	191G24-0		52	191H11-5					419288-5 / 413G23-5			
UC010G UC011G UC012G UC013G UC014G UC015G UC016G UC017G UC020G	30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/.043"	.325"LP	80TXL	MC	191T90-5	419288-5 / 413G23-5	Sprocket 3/8"LP 7 tooth	191V91-5
	35cm/14"	A041		191T87-4	59					191T91-3	419288-5 / 413G23-5		
	40cm/16"	A041		191T88-2	64					191T92-1	419242-9 / 413G21-9		
	45cm/18"	A041	Sprocket nose bar	191X03-0	70	1.1mm/.043"	3/8"LP	90PX	CC	191X04-8	419242-9 / 413G21-9	Sprocket 3/8"LP 6 tooth	191V90-7
	30cm/12"	A041		191G15-1	46					191H01-8	419288-5 / 413G23-5		
	35cm/14"	A041		191G16-9	52					191H02-6	419288-5 / 413G23-5		
	40cm/16"	A041	Sprocket nose bar	191G17-7	56	1.3mm/.050"	3/8"LP	91PX	CC	191H03-4	419242-9 / 413G21-9	Sprocket 3/8"LP 6 tooth	191V90-7
	30cm/12"	A041		191G23-2	46					191H10-7	419288-5 / 413G23-5		
	35cm/14"	A041		191G24-0	52					191H11-5	419288-5 / 413G23-5		
	40cm/16"	A041	Sprocket nose bar	191G25-8	56	1.3mm/.050"	3/8"LP	91PX	CC	191H12-3	419242-9 / 413G21-9	Sprocket 3/8"LP 6 tooth	191V90-7
	45cm/18"	A041		191G26-6	62					191H13-1	419242-9 / 413G21-9		

Electric Chain Saws

UC3041A UC3541A UC4041A	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/.043"	3/8"LP	90PX	CC	191H01-8	419288-5 / 413G23-5	Sprocket 3/8"LP 6 tooth	221526-1
	35cm/14"	A041		191G16-9	52					191H02-6	419288-5 / 413G23-5		
	40cm/16"	A041		191G17-7	56					191H03-4	419242-9 / 413G21-9		
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	Sprocket 3/8"LP 6 tooth	221521-1
	35cm/14"	A041		191G24-0	52					191H11-5	419288-5 / 413G23-5		
40cm/16"	A041	191G25-8	56	191H12-3	419242-9 / 413G21-9								
UC3050A, UC3550A UC4050A, UC4550A UC3051A, UC3551A UC4051A, UC4551A	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/.050"	3/8"LP	91PX	CC	191H10-7	419288-5 / 413G23-5	Sprocket 3/8"LP 6 tooth	221521-1
35cm/14"	A041	191G24-0		52	191H11-5					419288-5 / 413G23-5			
40cm/16"	A041	191G33-9		56	191H12-3					419242-9 / 413G21-9			
45cm/18"	A041	191G34-7		56	191H13-1					419242-9 / 413G21-9			

NEW Saw chain M01



Model No.	Guide Bar		Saw Chain					Drive sprocket	
	Bar length	Part No.	Gauge	Pitch	Type Makita	No. of drive links	Part No. (Carton)	Type	Part No.
DUC101, UC100D	10cm/4"	1910W0-3	1.1mm/.043"	3/16"	M01	44	-	Sprocket	-
DUC150, UC029G	15cm/6"	1912F1-4	1.1mm/.043"	3/16"	M01	54	1918H7-2	Sprocket	3/16"

Saw Chain: 14" (350mm) & 16" (400mm)
 Part No. **1914F3-2** SAW CHAIN 14" 1.1MM/.043" 3/8" SPRKT M41
1914F4-0 SAW CHAIN 16" 1.1MM/.043" 3/8" SPRKT M41

Model No. DUC, UC series.



Bar nut

* Pole saw attachment (196315-2)




Model No.	Thread Size	Wrench Size	Part No.
EA4300F, EA5001P, EA5000P, EA6100P, EA6101P, EA7300P, EA7301P, EA7900P, EA7901P	Single	2	252145-2

Round File, File holder

For Model:
Chain saw
* with handle

Saw Chain Type	Size	Round File		File and File Holder and File Holder
		Part No.	Q'ty	Part No.
25F, 25AP, 91P, 91PX, 91PXL, 91VXL, M91VXL, 466, 492, 196	4mm	*744003-1	1	-
		953003090	1	953030010
		D-67365	12	D-70948
90PX, 90SG, 291	4.5mm	953003100	1	195923-6
95VPX, 95TXL, 20BPX, 21BPX, 22BPX, 20LPX, 21LPX, 22LPX, 082, 086, 686, 484	4.8mm	953003070	1	-
		-	-	D-70960
		-	-	-
72DPX, 73DPX, 75DPX, 72LPX, 73LPX, 75LPX	5.2mm	D-67424	12	D-70976
72V, 73V, 75V, 72APX, 72DPX, 73DPX, 75DPX, 72EXL, 73EXL, 75EXL, 72EXJ, 73EXJ, 75EXJ, 72LGX, 73LGX, 75LGX, 72JGX, 73JGX, 75JGX, 72JPX, 73JPX, 75JPX, 72LPX, 73LPX, 75LPX, 72RD, 73RD, 75RD, 496, 093, 099	5.5mm	953003040	1	-
		-	-	D-70982

Pruning extension set

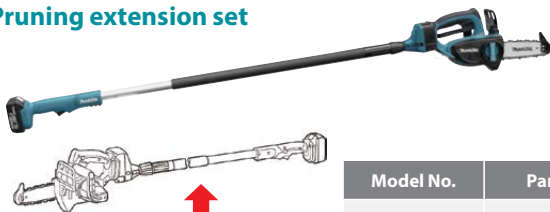

Model No.	Part No.
DUC122	195595-7

Holster For DUC101, UC100D & DUC150



Model No.	Part No.
DUC101, UC100D	1911R0-4
DUC150	1913K4-9

Flat File, Depth gauge



Flat file		Depth Gauge	Flat File and File Handle and Depth Gauge	File Handle
Part No.	Q'ty	Part No.	Part No.	Part No.
953003060	1	953003060	-	-
-	-	-	D-70998	-
D-67452	1	-	-	D-67496



File set for in Roll Up Pouch



For all saw chain

Description	Part No.
φ4.0mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72154
φ4.8mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72176
φ5.2mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72182
φ5.5mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72198

Chain oil

Description	Size	Part No.
Chain Oil  With Makita chain oil, chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. (Not available in Austria)	100ml	199897-3
BIOTOP Chain oil  With BIOTOP, chain oiling is safe for environment. BIOTOP is purely vegetablebased and readily biodegradable. It meets the strict requirements of the RAL UZ48 environment mark for environmental compatibility, lubrication, and aging resistance.	1L	1910U0-9

Hook holder for extension cord




Model No.	Description	Part No.
B	Cord holder complete set	194677-2

Shear blade & Blade cover for Grass Shear



Model No.	Cutting Width	Blade Assembly	Blade cover	Grass Receiver
DUM111, DUM110	110mm	191N23-4	413885-9	454880-0
DUM168, DUM604, UM600D, UM603D	160mm	195267-4	452055-5	457426-1

Conversion from Hedge Trimmer to Grass Shear

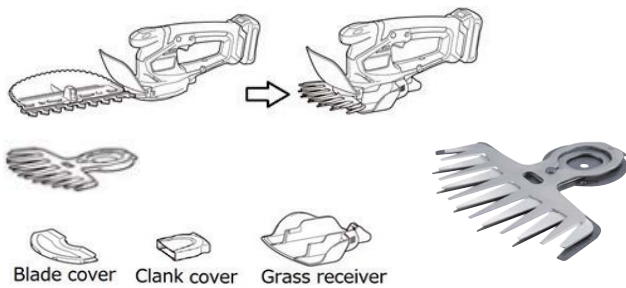

Model No.	Cutting Width	Blade assembly
UH201D	160mm	195267-4

Grass Receiver




*with grass Shear blade

Model No.	Part No.
DUM604, UM600D, UM603D, *UH201D	457426-1


Blade type

A: Curving blade

Optimum blade shape for smooth cutting




Twigs are caught easily and held firmly




B: High grade blade

Upper/ Lower blade teeth with 3 sharpened edges for clean cut.



Blade teeth with 3 sharpened edges Well sharpened edges provide clean cut with the least branch damage.




C: Stain-free blade

Non-electrolyzed nickel plating

Evenly and strongly adhered surface coating that features high anti-abrasion surface for long lasting coating.



Sap on the blade (after 10 hour trimming of Boxwood)



Model No.	Blade Assembly		Blade Cover
	Blade Type	Part No.	Part No.

Cordless Hedge Trimmer

*for China, Hong Kong, Korea, Malaysia, Philippines, Singapore, Taiwan & Vietnam.

**for Canada & Mexico

UH201D	C	198408-1	458342-0
DUH551	C	196687-5	-
DUH651	C	196688-3	450490-1
DUH506	C	1910H8-2 1914G4-7	-
DUH606	C	1910H9-0	-
DUH507	C	1911J1-6	-
DUH521, DUH523U, UH520D, UH522D	C	195769-0	-
DUH501	A	-	458413-3
DUH601	A	199099-1	458414-1 *459121-9
DUH751	A	199100-2	458415-9
DUH604S	B	191D38-1	-
DUH754S	B	191D39-9	-
DUH502	B	199598-3	459120-1
UH005G	A	191R54-7	-
UH006G	A	191R55-5	-
UH007G	A	191R56-3	-
UH008G	B	191R57-1	-
UH009G	B	191R58-9	-
UH014G	B	191Y05-2	-

Model No.	Blade Assembly		Blade Cover
	Blade Type	Part No.	Part No.

Pole Hedge Trimmer (Cordless, Petrol, Multi-tool attachments)

*with Blade guard

**without Blade guard

DUN461W, UN460WD	A	191P00-8	-
DUN500W	A	191C14-9	458413-3
DUN600L	A	191C13-1	-
EN401MP, EN410MP, EN4950H, EN4951SH	B	197768-8	-

Petrol Hedge Trimmer

*for blade without end cover

**for blade with end cover

EH5000W	B	123709-8	-
EH7500W	B	125857-9	-
EH6000S	B	-	-
EH7500S	B	125773-5	-

Chip receiver assembly set

Keeps branch or leaf debris from scattering around.

• Attachable to either side of the blade



Model No.	Description	Part No.
DUH202, *DUM111, *DUM604, UH201D, *UM110D, *UM600D, *UM603D	One-touch installation removal	198401-5
DUH501, DUH502, DUH601, DUH602, DUH751, DUH752	One-touch installation/removal	199151-5
DUH604S	-	191D33-1
DUH754S	-	191D34-9
UH004G, UH006G, UH008G	-	191R51-3
UH005G, UH007G, UH009G	-	191R52-1

Toothed edge


designed like saw teeth can catch and prevent leaf or twig debris from falling over the edge of chip receiver.



Anti-slide ribs on the bottom plate prevents leaf or twig debris from sliding and slipping out of chip receiver.

Model No.	Description	Content	Part No.
EH7500S, EN7350S	with blade guard	With binding head screw M5 x 12 x 5pcs.	195321-4

Conversion from Grass Shear to Hedge Trimmer

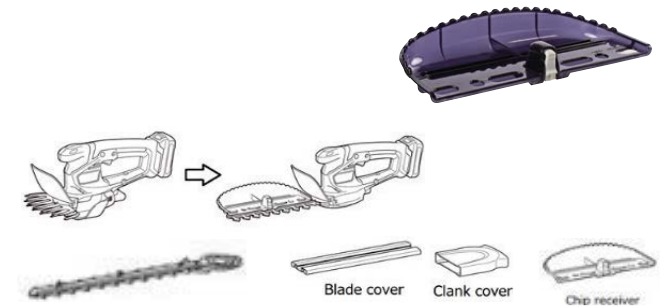

*With clank cover

Model No.	Blade Assembly	Blade Cover	Chip Receiver
	Part No.	Part No.	Part No.
DUM604, UM600D, UM603D	198408-1	*195274-7	198401-5
DUM110, DUM111	191N24-2	458342-0	198401-5
		*195274-7	

Long attachment handle (Extension handle kit)

Photo:198486-1



*with grass shear blade


Model No.	Part No.
DUM604, *DUH202, UM110D, DUM111, UM600D, UM603D, *UH201D	198486-1 198516-8

Pruning Shear blade

Shear blade (U)



Do not re-use Stop Ring E-4 when reassembling.



Shear blade (L)

Do not re-use Stop Ring E-4 when reassembling.
Stop Ring E-4

*With Stop Ring E-4 (P/N:961011-9)

**Hex socket button head screw M3x6 P/N:266183 & Shoulder bolt M8 P/N:251573-8 are also necessary.

Model No.	Type	*Shear Blade (U)	Shear Blade (L)
		Part No.	Part No.
DUP361 DUP362	Standard	197588-0* 197366-8*	197367-6
	For thin branch	199314-3**	-
UP100D	Standard	1911W2-5	1911W1-7

Diamond file for shear blade & Dresser stone set



Dresser stone



Model No.	Part No.
DUP361, DUP362	794530-8
DUP180, UP100D	1912E4-1

Long handle attachment for pruning shear



Model No.	Part No.
DUP180, UP100D	1916B3-6

Deflector cover set



You can discharge the mist upward or downward



Model No.	Part No.
PM001G	198248-7

Wheelbarrow attachment

Dump unit set
DCU603 & DCU604



Carrier set
DCU180



DCU604




Bucket set
DCU180



DCU603



DCU605



Auxiliary wheel attachment set

DCU180



Model No.	Type	Part No.
DCU180	Carrier set (Pipe deck)	199116-7
	Bucket set	198494-2
	Auxiliary wheel attachment set	191A01-6

Wheelbarrow attachment

Model No.	Type	Part No.
DCU602, DCU603, DCU604, DCU605	Dump Bucket 200 Set	191B69-8
	Carrier Set	191B67-2
DCU603, DCU604, DCU605	Flat Bucket Set	1911B3-6
	Dump Unit Set	191B63-0/ 1914G7-1(new)

Tire for Wheelbarrow



Model No.	Type	Part No.
DCU601, DCU602, DCU603, DCU604, DCU605	Tire 330 (Single) Set	1911K4-7
	Gray Tire 330 (Single) Set	1911K5-5
	Gray Tire 210 (Single) Set	1911K6-3

Rotary lawn mower blade



Model No.	Size (mm)	Part No.
Cordless Lawn Mower		
DLM330	330	GB00000042
DLM382	380	191D41-2
LM004G	430	1913H4-8
DLM432	430	191D43-8/ 197761-2
DLM460, DLM463	460	199367-2
DLM462, DLM465	460	191D51-9
DLM480, DLM481, LM001G, LM001J, LM003J	480	191V97-3
DLM530, DLM531, DLM532, DLM536, DLM537, LM001C	530	191D52-7/ 191V96-5
Electric Lawn Mower		
ELM3320	330	YA00000745
ELM3720	370	YA00000746
ELM4121	410	YA00000738
ELM4620	460	YA00000741
ELM4621	460	YA00000741

Collecting grass blade

Model No.	Size (mm)	Part No.
DLM530, DLM532, DLM533, DLM534, DLM536, DLM537, DLM538, DLM539, LM001C, LM002G, LM002J, LM004J	530	191W87-2

Mulching blade

Model No.	Size (mm)	Part No.
LM003G	380	1913H0-6
LM004G	430	1913H6-4
DLM530, DLM532, DLM533, DLM534, DLM536, DLM537, DLM538, DLM539, LM001C, LM002G, LM002J, LM004J	530	191Y65-4

Rotary lawn mower swing back blade



Model No.	Swing Back Blade Set		Replacement Blade Set	
	Size (mm)	Part No.	Size (mm)	Part No.
DLM462, DLM465	460	191D49-6	4	191D47-0
DLM530, DLM531, DLM532, DLM533, DLM535, DLM536, DLM537, LM001C	530	191D50-1	4	191D48-8

Mulching plug set



Model No.	Part No.
LM003G	1913H2-2
LM004G	1913H8-0
DLM382 DLM432	191D46-2

Dethatching & Scarifying blade

Dethatching Blade



Scarifying Blade



Model No.	Part No.
UV001G	1913J7-6
	1913J5-0

Pipe, End pipe, Flat nozzle & others accessory

*Adapter pipe 71 set are also necessary.

**Adapter pipe 80-72 set are also necessary.

***Adapter pipe 85-72 set are also necessary.

****Adapter pipe set MG set are also necessary.

Model No.	Items	Part No.
DUB184** DUB362 DUB363 UB001C*** UB001G*** UB400MP****	Extension Nozzle 	197888-8
	Flat nozzle 	197889-6
DUB184** DUB362* DUB363 UB001C*** UB001G*** UB400MP**** UB401MP****	Gutter nozzle set (2.9m) • Extension Pipe 72 0.9m P/N:459816-4) x3 • Nozzle P/N:162790-4) x1 • Hose Clamp 75-90 P/N:281030-2) x2 • Hose Clamp 85-100 P/N:281031-0) x1 	191B03-8
DUB362	Adapter pipe 71 set 	191J13-3
DUB184	Adapter pipe 80-72 set 	191L13-5
UB001C UB001G	Adapter pipe 85-72 set 	191L96-5
UB400MP UB401MP	Adapter pipe set MG 	191C15-7
UB001G DUB184 DUB362	Shoulder belt 	166094-6
UB002C	Adapter pipe 104-72 set 	1910M7-9
UB400MP UB401MP	Adapter pipe set MG 	191C15-7

Pipe

End nozzle

Flat nozzle



Model No.	Items	Part No.
EB5300TH, EB5300WH, EB7660TH, EB7660WH	Long pipe 90 set	197723-0
	End nozzle 90-62	198034-6
	Flat nozzle	196911-6
PM7650H, PM7651H	Top adapter	453986-1
UB004C	End nozzle 74 set	1914H0-2
	Flat nozzle set	1914H1-0
DUB187	T shape vacuum nozzle assy	GB00000165
UB003G	Flat nozzle	1916V7-8

Vacuum Attachment



Model No.	Description	Part No.
DUB363	Vacuum kit set	191E19-1
BHX2500, BHX2501	Vacuum set	195282-8
UB003G	Vacuum kit set	1916T9-0

Nozzle assembly


A: Standard equipment



Model No.	Size (mm)	Type	Part No.
DUB182	220	A	132025-7
UB100D, UB101D, DUB185, DUB186	220	A	123245-4
	430	-	123246-2

Tapered Nozzle

A: Standard equipment



Model No.	Color	Part No.
UB100D, UB101D, DUB185, DUB186	Gray	192236-6

Bending long nozzle set

* long nozzle



Model No.	Part No.
DUB183/DUB182	TP00000199
UB100D, UB101D, DUB185, DUB186	191G09-6
DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	196729-5

Flexible hose set

(Total length: 95cm)












Model No.	Part No.
DUB185, DUB186, UB100D, UB101D	196643-5

Power washer accessories for DHW080, HW1200, & HW1300 & HW001G

Shape	Model No.	Part No.
Trigger gun set 	DHW080, HW001G HW1200, HW1300	197842-2
Variospray nozzle set 	HW001G	1912Y4-1
Variospray nozzle ext. set 	HW001G	1912Y5-9
Variable nozzle set 	DHW080, HW001G HW1200, HW1300	197822-8
Vario spray lance set 	DHW080, HW001G HW1200, HW1300	191U88-8
Vario spray nozzle set 	DHW080 HW1200, HW1300	191U86-2
Variospray lance set 	DHW080, HW001G HW1200, HW1300	197876-5
Cyclone jet nozzle set 	DHW080, HW001G HW1200, HW1300	197824-4
Cyclone guard set 	DHW080, HW001G HW1200, HW1300	197864-2
Under body spray lance set 	DHW080, HW001G HW1200*, HW1300* (**for 110-127V)	197859-5
	DHW080, HW001G HW1200**, HW1300** (**for 220V-240V)	198909-9
Extension pipe set (0.9m / 1.3m / 1.7m) 	DHW080, HW001G HW1200, HW1300	197870-7
Rotating brush set 	DHW080, HW001G HW1200, HW1300	197831-7
Wash brush set 	DHW080, HW001G HW1200, HW1300	197828-6
Foam nozzle set 	DHW080, HW001G HW1200, HW1300	197886-2 (L) 1912Y2-5 (S)

Shape	Model No.	Part No.
Pipe cleaning hose 	DHW080, HW001G HW1200, HW1300	10m 197837-5 15m 197840-6
High pressure extension hose 	DHW080, HW001G HW1200, HW1300	5m 197845-6 8m 197847-2 10m 197850-3
Twist prevention joint set 	DHW080, HW001G HW1200, HW1300	197867-6
Self-suction hose set 	DHW080, HW001G HW1200, HW1300	197873-1
Hose assembly set (3m) 	DHW080, HW001G HW1200, HW1300	1910R1-6
Self-suction hose set (0.6m) 	DHW080, HW001G HW1200, HW1300	1910R2-4
Accessory joint set 	DHW080, HW001G HW1200, HW1300	197853-7
Absorption connector set 	DHW080, HW001G HW1200, HW1300	197881-2 (3082130)
One touch joint set 	DHW080, HW001G HW1200, HW1300	197883-8
Cleaner pin set 	DHW080, HW001G HW1200, HW1300	197879-9
Shoulder belt 	DHW080	162523-7

Cordless Pressure Washer for DHW180

Shape	Part No.
Foam nozzle 	LX00000001 
Plastic bottle adapter 	LX00000004 
Angle nozzle 	LX00000002 
Wheel brush 	LX00000003 
Cleaner pin ϕ 0.6 	LX00000063



Spark plug



Model No.	Wrench Size (mm)	Part No.
NGK CMR4A	16	168534-0
NGK CMR6A	16	168401-9
NGK CMR6H	16	168652-4
NGK CMR7A-5	16	168599-2
NGK BMR7A	19	168662-1

Fuel mixture



Model No.	Part No.
1L	456236-3

Grease vessel set



Description	Size	Part No.
For Pole hedge trimmer and Multi-tool attachments (Cultivator, Power brush and Power sweep) (GREASE NO.0)	80ml	197439-7
For string trimmer, Brushcutter and Hedge trimmer (GREASE NO.2)	80ml	199450-5





GENERAL EQUIPMENT

ML009GX Cordless Worklight

XGT LXT Li-Ion Cordless 96 LED Worklight, 10,000 Lumens

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Run Time (hrs)	w/BL4040x2, Low/Mid/High: 14/6.5/2.4
Illuminance (High / Mid / Low)	at 1m from the light source: 4,300 / 1,900 / 1,000 lx at 3m from the light source: 500 / 230 / 110 lx
Luminous Flux	High / Mid / Low: 10,000 / 4,000 / 2,000 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 248 x 386 x 305 mm, w/ Handle in Upright Position: 248 x 386 x 430 mm
Net weight	6.4 - 9.9 kg (14.1 - 21.8 lbs.)

40Vmax 18V 14.4V **XGT LXT**

Anti-glare film, Battery and Charger are sold separately

ML003G Cordless LED Worklight

High-intensity LED lights for wider range

Li-ion **AN** 8.0 4.0 2.5 2.0



Run Time (hrs)	Up to: 22 (Low mode, with BL4040)
Illuminance (High / Mid / Low)	at 1m from the light source: 500 / 200 lx at 0.5m from the light source: 1,900 / 800 lx
Luminous Flux	High / Low: 1,100 / 450 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 249x298x280mm (9-3/4"x11-3/4"x11") w/ Handle in Upright Position: 249x298x386mm (9-3/4"x11-3/4"x15-1/4")
Net weight	3.7 - 4.7 kg (8.2 - 10.4 lbs.)

40Vmax 18V **XGT LXT**

Battery and Charger are sold separately

ML005GX Cordless Worklight

40Vmax XGT Li-Ion Cordless LED Worklight, 3,600 Lumens

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Illuminance (High / Mid / Low)	at 1m from the light source: 2,100 / 1,000 / 500 lx
Luminous Flux	High / Mid / Low: 3,600 / 1,800 / 900 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 248 x 309 x 296 mm (9-3/4" x 12-1/8" x 11-5/8")
Net weight	4.6 - 6.5 kg (10.1 - 14.3 lbs.)

40Vmax 18V 14.4V **XGT LXT**

Battery and Charger are sold separately

DML811 18V, 14.4V / AC Cordless Worklight

30 super luminous daylight white LEDs

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 13
Illuminance (High / Mid / Low)	at 1m from the light source: 1,800 / 800 / 350 lx at 3m from the light source: 200 / 100 / 40 lx at 5m from the light source: 85 / 40 / 17 lx
Luminous Flux	High / Mid / Low: 3,000 / 1,500 / 750 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 249 x 302 x 271 mm (9-3/4" x 11-7/8" x 10-5/8")
Net weight	4.1 - 4.8 kg (9.0 - 10.5 lbs.)

18V 14.4V **LXT** **OC** **CP** **2**

AC Power Cord. Battery and Charger are sold separately

Power Supply Cord: 2.5 m (8.2 ft)

DML809 18V, 14.4V / AC Cordless Worklight

Cordless 96 LED Worklight, 10,000 Lumens

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 8.5
Illuminance (High / Mid / Low)	at 1m from the light source: 3,800 / 1,500 / 800 lx at 3m from the light source: 380 / 150 / 80 lx at 5m from the light source: 150 / 60 / 30 lx
Luminous Flux	High / Mid / Low: 10,000 / 4,000 / 2,000 lm
Dimensions (L x W x H)	w/ Handle in Retracted Position: 249x370x278 mm (9-3/4"x14-1/2"x11") w/ Handle in Upright Position: 249x370x370 mm (9-3/4"x14-1/2"x14-1/2")
Net weight	5.7 - 7.0 kg (12.6 - 15.4 lbs.)

18V 14.4V **LXT** **OC** **CP**

AC Power Cord. Battery and Charger are sold separately

Power Supply Cord: 2.5 m (8.2 ft)

DML805 Corded and Cordless LED Worklight

L.E.D. Lights Deliver Bright and Even Lighting For Large Workspaces

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 17
Illuminance	at 0.5m from the light source: Hi: 1,150 lx, Lo: 750 lx at 1m from the light source: Hi: 300 lx, Lo: 200 lx
Luminous Flux	Hi: 750 lm, Lo: 450 lm
Net weight	2.3 - 2.7 kg (5.1 - 5.9 lbs.)

18V 14.4V **LXT**

Battery and Charger are sold separately

Power supply cord: 2.5m (8.2ft)

DML813 / DML814 Cordless Worklight

Cordless 12 LED Worklight, 3,000 Lumens

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	w/BL1850(B) Low / Mid / High: 10 / 5.5 / 3
Illuminance (High / Mid / Low)	at 1m from the light source: 1,250 / 750 / 400 lx at 3m from the light source: 130 / 80 / 40 lx at 5m from the light source: 50 / 30 / 15 lx
Luminous Flux	High / Mid / Low: 3,000 / 1,700 / 900 lm
Dimensions (L x W x H)	Folding Position: 260x216x1,000 mm (10-1/4"x8-1/2"x39-3/8") Operating Position (Max Height): 573x658x1,250-2,240 mm (22-1/2"x26"x49-1/4"-88")
Net weight	DML813: 7.2 - 7.9 kg DML814: 7.4 - 8.1 kg

18V 14.4V **LXT** **1**

Shoulder Belt. Battery and Charger are sold separately

ML010G 40Vmax, 18V, 14.4V / AC Cordless Area Worklight

40Vmax XGT / 18V, 14.4V LXT Li-Ion Cordless Area Worklight, 5,500 Lumens


Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Illuminance (High / Med. / Low)	at 1 m from the light source: 550 / 300 / 150 lx at 3 m from the light source: 70 / 40 / 20 lx at 5 m from the light source: 25 / 15 / 7 lx
Luminous flux	High / Med. / Low: 5,500 / 3,000 / 1,500 lm
Continuous run time on full battery charge (High / Med. / Low)	w/ BL1860B x2: 4.5 / 8.5 / 16 hours w/ BL4040 x2: 6.5 / 11 / 21 hours
Dimensions (L x W x H)	490 x 490 x 814 mm
Net weight	14.4 - 19.2 kg (31.7 - 42.3 lbs.)

40Vmax 18V 14.4V **XGT LXT** **OC** **CP** **XPT**

AC power cord. Battery and Charger are sold separately

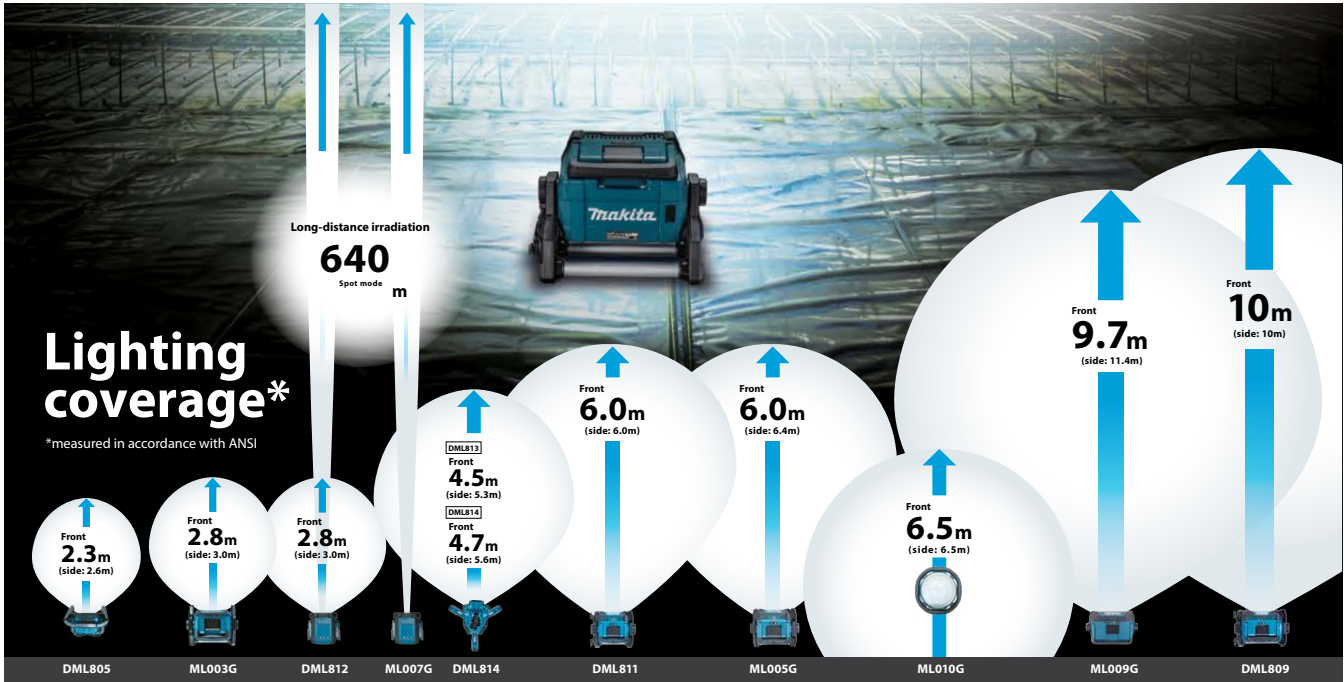

Luminous flux



ML013G Cordless Magnetic Light

New

40Vmax XGT Li-Ion LED Magnetic Light, 1,200 Lumens

Li-ion Ah 5.0 4.0 2.5 2.0



Color temperature	Daylight white: 5,000 K
Luminous flux (Mode)	3
Luminous flux	High / Med. / Low: 1,200 / 800 / 500 lm w/ BL4040, High / Med. / Low: 12 / 18 / 29 hours at 0.5 m from the light source: 1,750 / 1,150 / 700 lx, at 1 m from the light source: 400 / 250 / 150 lx
Continuous use	
illuminance	
Dimensions (L x W x H)	196 x 91 x 161 mm (7-3/4 x 3-5/8 x 6-3/8")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

40Vmax XGT XPT

Magnet cover, Battery and Charger are sold separately

DML819 Cordless Magnetic Light

New

18V LXT Li-Ion LED Magnetic Light, 1,200 Lumens

Li-ion Ah 6.0 5.0 3.0 1.5



Color temperature	Daylight white: 5,000 K
Luminous flux (Mode)	3
Luminous flux	High / Med. / Low: 1,200 / 800 / 500 lm w/ BL4040, High / Med. / Low: 9 / 14 / 22 hours at 0.5 m from the light source: 1,750 / 1,150 / 700 lx, at 1 m from the light source: 400 / 250 / 150 lx
Continuous use	
illuminance	
Dimensions (L x W x H)	178 x 91 x 161 mm (7 x 3-5/8 x 6-3/8")
Net weight	1.2 - 2.2 kg (2.6 - 4.9 lbs.)

18V LXT XPT

Magnet cover, Battery and Charger are sold separately

Compact design for easy attachment in tight spaces



Foldable rotating LED head.



300° horizontal
90° right / 210° left

Folds down to an even more compact size.



180° vertical
Auto shut-off when the light surface is folded inward.

Folds down to an even more compact size.



Luminous flux
High / Medium / Low
1,200 / 800 / 500 lm

Magnetically attaches to metal surfaces



ML012G Cordless Bar Light

40Vmax XGT Cordless Bar Light, 1,700 Lumens

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Color temperature	Daylight white: 5,000 K
Brightness setting	3
Luminous flux	High / Med. / Low: 1,700 / 800 / 400 lm w/ BL4040, High / Med. / Low: 7 / 15 / 32 hours at 0.5m from the light source, w/ all 42 LEDs on, High / Med. / Low: 2,000, 1,000, 450 lx at 1.0m from the light source, w/ all 42 LEDs on, High / Med. / Low: 600, 300, 100 lx
Continuous use	
illuminance	
Dimensions (L x W x H)	w/o Battery: 972 x 85 x 100 mm
Net weight	2.0 kg (4.4 lbs.)

40Vmax **XGT XPT**

Telescopic hook, Shoulder strap, Battery and Charger are sold separately

DML818 Cordless Bar Light

14.4V/18V LXT Cordless Bar Light, 1,700 Lumens

Li-ion **AN** 6.0 5.0 3.0 1.5



Color temperature	Daylight white: 5,000 K
Brightness setting	3
Luminous flux	High / Med. / Low: 1,700 / 800 / 400 lm w/ BL1860B, High / Med. / Low: 5 / 11 / 23 hours w/o Battery: 972 x 80 x 101 mm (38-1/4 x 3-1/8 x 4")
Continuous use	
Dimensions (L x W x H)	
Net weight	1.7 kg (3.7 lbs.)

18V 14.4V **LXT XPT**

Telescopic hook, Shoulder strap, Battery and Charger are sold separately

ML007G Cordless Flashlight

40Vmax XGT Li-Ion Flashlight Provides 500 Lumens

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Run Time (hrs)	Up to: 14 (Spot, with BL4050F)
illuminance	Spot / Flood / Spot-Flood: 82,000 / 520 / 60,000 lx
Luminous Flux	Spot / Flood / Spot-Flood: 600 / 1,000 / 1,250 lm w/ BL4025:
Dimensions (L x W x H)	330 x 120 x 118 mm (13 x 4-3/4 x 4-5/8")
Net weight	1.6 - 2.9 kg (3.5 - 6.4 lbs.)

40Vmax **XGT XPT**

Battery and Charger are sold separately

DML812 Cordless Flashlight

LED Flashlight, 1,250 Lumens

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 10 (Spot, with BL1860B)
illuminance	at 1m from the light source Spot Mode / Flood Mode / Spot-Flood Mode: 71,000 / 520 / 51,000 lx
Luminous Flux	Spot Mode / Flood Mode / Spot-Flood Mode: 600 / 1,000 / 1,250 lm w/ BL1830B / BL1850B / BL1860B:
Dimensions (L x W x H)	313 x 119 x 115 mm (12-3/8" x 4-1/16" x 4-1/2")
Net weight	1.2 - 1.6 kg (2.6 - 3.4 lbs.)

18V 14.4V **LXT XPT** 8

Strap Hook. Battery and Charger are sold separately

Illuminance: at 1m from the light source

ML001G LED Flashlight

40Vmax XGT Li-Ion LED Flashlight, 160 Lumens

Li-ion **AN** 8.0 5.0 4.0 2.5 2.0



Run Time (hrs)	Up to: 55
Luminous Flux	160 lm
illuminance	at 1m from the light source: 3,000 lx
Dimensions (L x W x H)	w/ BL4025: 281 x 88 x 121 mm (11-1/8 x 3-1/2 x 4-3/4") w/ BL4040: 287 x 88 x 136 mm (11-1/4 x 3-1/2 x 5-3/8")
Net weight	1.0 - 1.3 kg (2.2 - 2.9 lbs.)

40Vmax **XGT** 12

Strap Hook. Battery and Charger are sold separately

DML815 18V, 14.4V Cordless LED Flashlight

18V / 14.4V LXT Li-Ion LED Flashlight, 160 Lumens

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 54
Luminous Flux	160 lm
illuminance	at 1m from the light source: 3,000 lx
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 272 x 79 x 116 mm (10-3/4" x 3-1/8" x 4-9/16")
Net weight	0.26 - 0.93 kg (0.57 - 2.05 lbs.)

18V 14.4V 5

Strap Hook. Battery and Charger are sold separately

ML002G Cordless LED Worklight

40Vmax XGT Li-Ion 21 LED Worklight, 710 Lumens

Li-ion **AN** 4.0 2.5 2.0



Run Time (hrs)	Up to: 51
Main light (on bar side)	Luminous flux (Full brightness): 710 lm illuminance (Full brightness): 340 lx Luminous flux (Half brightness): 340 lm illuminance (Half brightness): 310 lx
Sub light (on top side)	Luminous flux: 130 lm illuminance: 1,900 lx
Dimensions (L x W x H)	w/ BL4025: 376 x 86 x 126 mm w/ BL4040: 382 x 86 x 141 mm
Net weight	1.2 - 1.5 kg (2.7 - 3.3 lbs.)

40Vmax **XGT XPT** 6

Battery and Charger are sold separately

Length (with the hook stood). Illuminance: at 50 cm from the light source

DML807 Cordless LED Flashlight

18V / 14.4V LXT Li-Ion 21 LED Flashlight

Li-ion **AN** 6.0 5.0 3.0 1.5



Run Time (hrs)	Up to: 43
Main light (on bar side)	Luminous flux (Full brightness): 710 lm illuminance (Full brightness): 340 lx
Sub Light (on top side)	Luminous flux: 130 lm illuminance: 1,900 lx
Dimensions (L x W x H)	414 x 79 x 155 mm (16-1/4 x 3-1/8 x 6-1/8")
Net weight	0.72 - 1.1 kg (1.6 - 2.4 lbs.)

18V 14.4V **LXT XPT USB**

Battery and Charger are sold separately

Length (with the hook stood). Illuminance: at 50 cm from the light source

ML006GX Cordless Flashlight

40Vmax XGT Li-Ion Flashlight Provides 500 Lumens

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Run Time (hrs)	Up to: 82 (Low mode, with BL4040)
Illuminance (at 0.5m from the light source)	High/Medium/Low: 800 / 400 / 180 lx
Luminous Flux	High/Medium/Low: 500 / 250 / 100 lm
Dimensions (L x W x H)	w/ BL4040: 275 - 408 x 85 x 148 mm (10-7/8 - 16 x 3-3/8 x 5-7/8")
Net weight	1.1 - 1.7 kg (2.4 - 3.8 lbs.)

40Vmax XGT XPT

Shoulder hook set, Lamp shade, Battery and Charger are sold separately

DML816 Cordless Flashlight

18V LXT Li-Ion Flashlight Provides 500 Lumens

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Run Time (hrs)	Up to: 75 (Low mode, with BL1860B)
Illuminance (at 0.5m from the light source)	High/Medium/Low: 800 / 400 / 180 lx
Luminous Flux	High/Medium/Low: 500 / 250 / 100 lm
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 267 - 400 x 79 x 127 mm (10-1/2 - 15-3/4 x 3-1/8 x 5")
Net weight	0.70 - 1.1 kg (1.5 - 2.4 lbs.)

18V 14.4V LXT XPT

Shoulder hook set, Lamp shade, Battery and Charger are sold separately

ML011G Cordless Worklight

40Vmax XGT Li-Ion Cordless Worklight, 300 Lumens

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm
Run time (hrs)	w/ BL4040, at 300 lm: 37, w/ BL4040, at 150 lm: 64
Dimensions (L x W x H)	w/o Battery: 107 x 77 x 50 mm
Net weight	0.19 kg (0.42 lbs.)

40Vmax XGT USB

Warm color cover, Battery and Charger are sold separately



DML817 Cordless Worklight

18V/14.4V LXT Li-Ion Cordless Worklight, 300 Lumens

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm
Run time (hrs)	w/ BL1860B, at 300 lm: 28, w/ BL1860B, at 150 lm: 49
Dimensions (L x W x H)	w/o Battery: 107 x 77 x 50 mm
Net weight	0.21 kg (0.46 lbs.)

18V 14.4V LXT USB

Warm color cover, Battery and Charger are sold separately

ML107 Cordless Worklight

12Vmax CXT Li-Ion Cordless Worklight, 200 Lumens

Li-ion Ah 4.0 | 2.0 | 1.5



Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 175 / 130 / 130 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 200 / 100 / 100 lm
Run time (hrs)	w/ BL1041B, at 300lm: 17, w/ BL1041B, at 150lm: 29
Dimensions (L x W x H)	w/o Battery: 92 x 54 x 47 mm
Net weight	0.29 kg (0.13 lbs.)

12Vmax CXT USB

Warm color cover, Battery and Charger are sold separately

CF003GZ 450mm (17-3/4") Cordless Fan

40Vmax XGT / 18V LXT Li-Ion Cordless 450 mm (17-3/4") Fan

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Air velocity	96-300 m/min
Air flow	38-120 m ³ /min
Fan diameter	450 mm (17-3/4")
Fan head angle adjustment	Up: 90° / Down: 45° Left: 90° / Right: 90°
Automatic oscillation	Left: 60, 90, 120° Right: 60, 90, 120°
Continuous use (min.) w/o oscillation	w/ BL4040: 115 / w/ BL4080F: 230 / w/ BL1860B: 90
Dimensions (L x W x H)	w/o Battery: 312 x 633 x 770 mm (12-1/4 x 25 x 30-1/4")
Net weight	w/o Battery: 7.9 kg (17.4 lbs.)

40Vmax 18V XGT LXT

AC Adaptor, Z: Battery and Charger are sold separately

CF002GZ 330mm (13") Cordless Fan

Increased max air velocity 240 m/min

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Continuous Use (min.) w/o oscillation	w/ BL4040: Low / Mid / High: 1,020 / 640 / 320
Continuous Use (min.) w/o oscillation	w/ BL4040: Low / Mid / High: 970 / 610 / 305
Max Air Velocity	High / Mid / Low: 240 / 170 / 120 m/min
Air Flow	High / Mid / Low: 21 / 15 / 10 m ³ /min
Noise level	52 dB(A)
Fan Diameter	330 mm (13")
Dimensions (L x W x H)	w/ BL4040: 277 x 439 x 602 mm
Net weight	3.8 - 5.1 kg (8.4 - 11.2 lbs.)

40Vmax XGT

AC Adaptor, Z: Battery and Charger are sold separately

CF001GZ 235 mm (9-1/4") Cordless Fan

40Vmax XGT Automatic Swing Fan

Li-ion Ah 5.0 4.0 2.5 2.0



40Vmax

AC Adaptor, Z: Battery and Charger are sold separately

Continuous Use (min.) w/o oscillation	w/ BL4040 Low / Mid / High: 1,160 / 880 / 660 w/ BL4025 Low / Mid / High: 730 / 550 / 410
Continuous Use (min.) w/ oscillation	w/ BL4040 Low / Mid / High: 1,055 / 800 / 600 w/ BL4025 Low / Mid / High: 665 / 500 / 370
Max Air Velocity	High / Med / Low: 190 / 150 / 120 m/min
Air Flow	High / Med / Low: 8.2 / 6.5 / 5.2 m³/min
Dimensions (L x W x H)	143x333x463 mm (5-5/8"x13"x18-1/4")
Net weight	2.0 - 3.0 kg (4.4 - 6.6 lbs.)

DCF301Z 330mm (13") Cordless Fan

Increased max air velocity 240 m/min

Li-ion Ah 6.0 5.0 3.0 1.5



18V 14.4V

AC Adaptor, Z: Battery and Charger are sold separately

Continuous Use (min.) w/o oscillation	w/ BL1860B: Low / Mid / High: 850 / 430 / 215
Continuous Use (min.) w/ oscillation	w/ BL1860B: Low / Mid / High: 815 / 415 / 210
Max Air Velocity	High / Mid / Low: 240 / 170 / 120 m/min
Air Flow	High / Mid / Low: 21 / 15 / 10 m³/min
Noise level	52 dB(A)
Fan Diameter	330 mm (13")
Dimensions (L x W x H)	w/ BL1860B: 269 x 439 x 602 mm
Net weight	3.8 - 4.5 kg (8.4 - 9.9 lbs.)

DCF203Z 235 mm (9-1/4") Cordless Fan

Automatic Swing Fan

Li-ion Ah 6.0 5.0 3.0 1.5



18V 14.4V

Z: Battery and Charger are sold separately

Max Continuous Use (min.)	w/ BL1860B: Low / Medium / High: 1,010 / 650 / 410
Max Air Velocity	High / Med / Low: 190 / 150 / 120 m/min
Air Flow	High / Med / Low: 8.2 / 6.5 / 5.2 m³/min
Dimensions (L x W x H)	140x333x447 mm (5-1/2"x13"x16-1/2")
Net weight	1.9 - 2.6 kg (4.2 - 5.6 lbs.)

DCF102Z 180 mm (7-1/8") Cordless Fan

Automatic Swing Fan

Li-ion Ah 6.0 5.0 3.0 1.5



18V

Z: Battery and Charger are sold separately

Max Continuous Use (min.)	w/ BL1860B: Low / Medium / High: 1,270 / 705 / 575
Dimensions (L x W x H)	185x272x284 mm (7-1/4"x10-3/10"x11-1/8")
Net weight	1.3 - 2.0 kg (2.9 - 4.4 lbs.)

CW002GZ Cordless Cooler & Warmer Box

Large 50 L capacity

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

Cigar Socket Cable, Z: Battery and Charger are sold separately

Capacity	50 L (13.2 gal)
Cooling Capacity	-18/-15/-10/-5/0/5/10°C (0/5/15/25/30/40/50°F)
Warming System	30/35/40/45/50/55/60°C (85/95/105/115/120/130/140°F)
Run Time	w/ BLBL4040, -18/5/60°C: 8/19.5/4.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Storage dimensions (L x W x H)	500 x 320 x 320 mm (19-3/4 x 12-5/8 x 12-5/8")
Dimensions (L x W x H)	867 x 465 x 476 mm (34-1/8 x 18-1/4 x 18-3/4")
Net weight	25.6 - 29.0 kg (56.4 - 63.9 lbs.)

CW004GZ Cordless Cooler & Warmer Box

A combination of XGT battery and LXT battery is also accepted

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

Shoulder belt, AC adaptor, Cigar socket cable, Inner tray, Inner basket, Z: Battery and Charger are sold separately

Capacity	29 L (7.7 gal)
Cooling System	-18°C (0°F)
Warming System	60°C (140°F)
Temperature setting	17 settings: -18/-15/-10/-5/0/5/10/15/20/25/30/35/40/45/50/55/60°C
Run Time	w/ BL4050F x2, -18/5/60°C: 12.5/30.0/11.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (7.2/8.2 ft)
Storage Dimensions (L x W x H)	343 x 240 x 338 mm (13-1/2 x 9-5/8 x 13-1/4")
Dimensions (L x W x H)	676 x 345 x 471 mm (26-5/8 x 13-5/8 x 18-1/2")
Net weight	7.5 - 20.9 kg (16.6 - 46.1 lbs.)

CW001GZ Cordless Cooler & Warmer Box

Powered by 4 sources: 40Vmax / 18V / 12V/24V DC (cigar socket) / AC

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

Capacity	20 L (5.3 gal)
Cooling System	Compressor type
Cooling Capacity	-18/-15/-10/-5/0/5/10°C
Warming System	Heater
Warming Capacity	30/35/40/45/50/55/60°C
Run Time	w/ BL4050F X2, -18/5/60°C: 10h/28h/8.5h
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Dimensions (L x W x H)	663x341x372 mm (26-1/8x13-3/8x14-5/8")
Net weight	13.5 - 16.1 kg (29.8 - 35.5 lbs.)

CW003GZ Cordless Cooler & Warmer Box

Compact design, 7 L capacity

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

Capacity	7 L (1.8 gal)
Cooling System	Compressor type
Cooling Capacity	-18/-15/-10/-5/0/5/10°C
Warming System	Heater
Warming Capacity	30/35/40/45/50/55/60°C
Run Time	w/ BLBL4040, -18/5/60°C: 5.5/13.5/5.5
Cord Length	AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft)
Dimensions (L x W x H)	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")
Net weight	7.9 - 9.4 kg (17.4 - 20.7 lbs.)

DMR108 Job Site Radio

7.2V-18V CXT LXT Li-Ion Cordless Bluetooth Job Site Radio

Li-ion Ah 6.0 5.0 3.0 1.5



Frequency Band	FM / AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Speaker Size	Woofer: Ø89 mm x2
Max Output	18V: 3.5 W x2 / 14.4V: 2.2 W x2 / 12Vmax: 1.2 W x2 / 7.2V: 0.5 W x2
Bluetooth	Version: 4.0 Profile: A2DP / SCMS-T Supported Codec: SBC Max Transmission Range: 10 m (33 ft) w/ Handle in Upright Position: 262x163x431 mm (10-3/8"x6-3/8"x17")
Dimensions (L x W x H)	
Net weight	4.4 kg (9.7 lbs.)

Bluetooth

18V 14.4V 12Vmax 10.8V 7.2V



AC Adaptor, AA Battery

MR010G Cordless Radio with Lantern

40Vmax XGT Cordless Bluetooth Radio with Lantern

Li-ion Ah 5.0 4.0 2.5 2.0



Frequency Band	FM: 87.5-108 MHz
Speaker Size	Ø57 mm
Illuminance (High/Low)*	Flashlight: 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65
Luminous flux (High/Low)	Flashlight: 200/100, Lantern: Daylight white 310/155, Neutral white 300/150, Warm white 260/130
Bluetooth	Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft)
Dimensions (L x W x H)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

Bluetooth

40Vmax XGT XPT

Strap Hook, Battery and Charger are sold separately

DMR057 Cordless Radio with Lantern

18V/14.4V LXT Cordless Radio with Lantern

Li-ion Ah 6.0 5.0 3.0 1.5



Frequency Band	FM: 87.5-108 MHz
Speaker Size	Ø57 mm
Illuminance (High/Low)*	Flashlight: 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65
Luminous flux (High/Low)	Flashlight: 200/100, Lantern: Daylight white 310/155, Neutral white 300/150, Warm white 260/130
Bluetooth	Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft) w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
Dimensions (L x W x H)	
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

Bluetooth

18V 14.4V LXT XPT

Strap Hook, Battery and Charger are sold separately

MP001GZ Cordless Inflator

3 Inflation modes (High speed, Low speed or Ball modes)

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Air Discharge Amount	200 kPa: 24 L/min 700 kPa: 12 L/min1
Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]
Hose Length	65 cm (25-1/2")
Sound Pressure	71 dB(A)
Dimensions (L x W x H)	w/BL4020 / BL4025: 320 x 108 x 231 mm (12-5/8 x 4-1/4 x 9-1/8"), w/BL4040: 329 x 108 x 231 mm (13 x 4-1/4 x 9-1/8"), w/BL4050F: 351 x 108 x 231 mm (13-3/4 x 4-1/4 x 9-1/8")
Net Weight	2.9 - 3.5 kg (6.4 - 7.7 lbs.)

40Vmax



British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are sold separately

DMP180Z Cordless Inflator

18V max LXT Li-Ion Cordless Inflator

Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Pressure	830 kPa (121 PSI)
Air Discharge amount	200 kPa: 10 L/min
Dimensions (L x W x H)	w/BL1830B / BL1850B / BL1860B: 270x76x175 mm (10-5/8"x3"x6-7/8")
Net weight	1.5 - 1.8 kg (3.3 - 4.0 lbs.)

18V



British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are sold separately

MP100DZ Cordless Inflator

12Vmax CXT Li-Ion Cordless Inflator

Li-ion Ah 4.0 2.0 1.5



Max Air Pressure	830 kPa
Air Discharge amount	200kPa: 10 L/min
Dimensions (L x W x H)	w/BL1016/BL1021B: 235x74x173 mm (9-1/4"x2-15/16"x6-13/16") w/BL1041B: 255x74x173 mm (10"x2-15/16"x6-13/16")
Net weight	1.2 - 1.3 kg (2.6 - 3.0 lbs.)

12Vmax



Valve adapter, Ball adapter, Floating tube adapter, DZ: Battery and Charger are sold separately

AS001GZ02 Cordless Dust Blower

Achieves higher blowing force

Li-ion Ah 5.0 4.0 2.5 2.0



Max blowing force	Mode:4/3/2/1: 2.8/2.3/1.7/1.1 N
Max air volume	Mode: 4/ 3/ 2/ 1: 1.1/ 1.0/ 0.8/ 0.6 m³/min
Max sealed suction	10.3 kPa
Continuous Use (min.)	Mode: 4/ 3/ 2/ 1: 13/ 17/ 25/ 50
Sound Pressure Level	79 dB(A)
Vibration Emission	2.5 m/s² or less
Dimensions (L x W x H)	w/BL4020 / BL4025: 180 x 94 x 248 mm (7-1/8 x 3-11/16 x 9-3/4")
Net weight	1.5 - 2.3 kg (3.3 - 5.1 lbs.)

40Vmax



Nozzle 3, Nozzle 7, Nozzle 13, Pinch valve nozzle, Wide range nozzle, Battery, Charger, Z: Battery and Charger are sold separately

DAS180Z Cordless Dust Blower

18V LXT BL Cordless Air Duster

Li-ion Ah 6.0 5.0 3.0 1.5



Air volume	0-1.1 m³/min
Air velocity	0-150 m/s
Air pressure	0-18.0 kPa
Blowing force	Mode 1: 0-1.1 N Mode 4: 0-2.8 N
Max Sealed Suction	9.3 kPa
Continuous Use (min.)	BL1860B, Mode 1: 55 BL1860B, Mode 4: 15
Dimensions (L x W x H)	w/o Battery: 173 x 92 x 247 mm (6-13/16 x 3-5/8 x 9-3/4")
Net weight	1.2 - 1.7 kg (2.6 - 3.7 lbs.)

18V



Nozzle, Pinch valve nozzle, Wide range nozzle, Flexible nozzle, Air vent hose, Rubber attachment, Filter, Belt clip, Battery, Charger, Z: Battery and Charger are sold separately

Makita Cordless Part Number Breakdown

DSE	Charger (DC10WA), 2X7.2V - 1.0Ah Batteries (BL7010)	
DW	Charger (DC10WA), 1X10.8V - 1.3Ah Battery (BL1013)	
DWE	Charger (DC10WA), 2X10.8V - 1.3Ah Batteries (BL1013)	
DWYE	Standard Charger (DC10WD), 2X12Vmax - 1.5Ah Batteries (BL1016)	
DSYE	Fast Charger (DC10SB), 2X12Vmax - 1.5Ah Batteries (BL1016)	
DSAE	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B)	
DSAJ	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B), Makpac	
DSME	Fast Charger (DC10SB), 2X12Vmax - 4.0Ah Batteries (BL1041B)	
SYE	Standard Charger (DC18SD), 2X18V - 1.5Ah Batteries (BL1815B)	
RYE	Rapid Charger (DC18RC), 2X18V - 1.5Ah Batteries (BL1815B)	
SF	Standard Charger (DC18SD), 1X18V - 3.0Ah Battery (BL1830B)	
RF	Rapid Charger (DC18RC), 1X18V - 3.0Ah Battery (BL1830B)	
RFE/ RF2	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B)	
RFJ	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B), Makpac	
RME	Rapid Charger (DC18RC), 2X18V - 4.0Ah Batteries (BL1840B)	
RTE/ RT2	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B)	
RTJ	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
PT2	Dual Port Rapid Charger (DC18RD), 2X18V - 5.0Ah Batteries (BL1850B)	
PG2J	Dual Port Rapid Charger (DC18RD), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
G2	2X18V - 6.0Ah Batteries (BL1860B)	

Makita Coding System - Ending Alphabet

DDF484 R T E

Charger

S - Standard Charger
R - Rapid (Fast) Charger
P - Two Port Charger

Come with Battery

H - 1.3Ah **M** - 4.0Ah
Y - 1.5Ah **T** - 5.0Ah
A - 2.0Ah **G** - 6.0Ah
D - 2.5Ah **L** - 8.0Ah
F - 3.0Ah

Comes with
2 batteries

Other:

B - Double Insulation
C - Electronic Control
F - LED Light
K - Carrying Case
2 - 18V x 2 Tools

Z

Tool come with
carton box only

For more information, please contact Makita authorised distributor's technical team.

MAKPAC Power Source Kit **XGT** **40V^{max}** LITHIUM-ION

QADPSKG1 (191V23-2)	Standard Charger (DC40RC), 2X40Vmax - 2.0Ah Batteries (BL4020), Makpac	
QAEPSKG1 (191V31-3)	Standard Charger (DC40RC), 2X40Vmax - 2.5Ah Batteries (BL4025), Makpac	
MKP1G001 (191J85-8)	Rapid Charger (DC40RA), 2X40Vmax - 2.5Ah Batteries (BL4025), Makpac	
MKP1G002 (191K01-6)	Rapid Charger (DC40RA), 2X40Vmax - 4.0Ah Batteries (BL4040), Makpac	
PSKGRT2J (191V42-8)	Rapid Charger (DC40RA), 2X40Vmax - 5.0Ah Batteries (BL4050F), Makpac	
QAAPSKG3 (191U06-6)	Dual Port Multi Rapid Charger (DC40RB), 2X40Vmax - 4.0Ah Batteries (BL4040), Makpac	
PSKGPT2J (191U20-2)	Dual Port Multi Rapid Charger (DC40RB), 2X40Vmax - 5.0Ah Batteries (BL4050F), Makpac	
PSKGPL2J (1910A2-5)	Dual Port Multi Rapid Charger (DC40RB), 2X40Vmax - 8.0Ah Batteries (BL4080F), Makpac	
QACPSKG3 (191U34-1)	Dual Port Multi Rapid Charger (DC40RB), 4X40Vmax - 4.0Ah Batteries (BL4040), Makpac	
PSKGPT4J (191U48-0)	Dual Port Multi Rapid Charger (DC40RB), 4X40Vmax - 5.0Ah Batteries (BL4050F), Makpac	

MAKPAC Power Source Kit **LXT** **18V** LITHIUM-ION

MKP1RF182 (197974-5)	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B), Makpac	
MKP1RT182 (197803-2)	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP1RG182 (198119-8)	Rapid Charger (DC18RC), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
MKP3PT182 (198182-1)	Dual Port Rapid Charger (DC18RD), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP3PG182 (198081-7)	Dual Port Rapid Charger (DC18RD), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
MKP3PT184 (197627-6)	Dual Port Rapid Charger (DC18RD), 4X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP3PG184 (198095-6)	Dual Port Rapid Charger (DC18RD), 4X18V - 6.0Ah Batteries (BL1860B), Makpac	

MAKPAC Power Source Kit **CXT** **12V^{max}** LITHIUM-ION

MKP1SY122 (197654-3)	Fast Charger (DC10SB), 2X12Vmax - 1.5Ah Batteries (BL1016), Makpac	
MKP1SA122 (191K13-9)	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B), Makpac	
MKP1SM122 (191K12-1)	Fast Charger (DC10SB), 2X12Vmax - 4.0Ah Batteries (BL1041B), Makpac	

Icon

- | | | | |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|  Double Insulation |  Electronic 3-Speed |  Automatic Oiling |  Revolving Hose |
|  Variable Speed |  Electronic 4-Speed |  Stainless Tank |  Static Free Hose |
|  Brake |  Dust Collection |  Grass Tangle Removing Function |  Built-in Job Light |
|  Reversing |  Torque Limiter |  Chain Brake |  Anti-restart function |
|  Mechanical 2-Speed |  Constant Speed |  Anti Vibration |  Toolless blade change |
|  Electronic 2-Speed |  Soft Start | | |



ECO-FRIENDLY

Zero emission as compared to 2 or 4 stroke engines. No Smell of Gas residue- Healthy and pleasant environment for Guests.



EASE OF MAINTENANCE

No need to change engine oil and spark plugs. No oil spills, No filter cleanings or cable adjustments.



ULTRA LOW NOISE

Average 15-20% lower as compared to 2 stroke engines - No Disturbance for Guests.



LOWER REPAIR & MAINTENANCE COST

With lesser moving parts, the repair time and cost on electric is lower than 2 and 4 stroke engines.



USER-FRIENDLY

Lighter in weight and low vibration- Increase productivity of staffs.



NO FUEL FIRE RISK

No fire hazards caused by petrol.



EASIER TO OPERATE

Easy to start, No prepping, priming, and pulling to start the engine No special skills required - Any staff can use.



SAFE

No cables - No risk of Electric shock to Guests & Staff, No tripping over by Cable by Guests or Staffs.

TRADEMARKS



Makita Corporation and its affiliates (collectively referred to as "Makita") are the registered owners of the above trademarks and own the exclusive rights to these trademarks. A party who manufactures, advertises, offers for sale, sells, distributes, imports or exports power tools, batteries and/or related accessories using a trademark which is identical or similar to our trademarks may have infringed our trademarks. Makita take a serious view of trademark infringement and will not hesitate to take any legal action against any party who infringes our trademark rights.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
 Phone : +65-6546-8700 Fax : +65-6546-8711
 Email : msgproductteam@makita.com.sg
 Website : www.makita.com.sg
 Facebook : www.facebook.com/MakitaSG



Visit our website



PRINTED IN SINGAPORE