Satisfy Professional's Needs

LXT

Makita® Cordless Power Scraper DHK180 Adapted for SDS-PLUS bits

High power & Low vibration

Impact Energy	Vibration Level
3.1 J	4.5 m/s²

EPTA-Procedure 05/2009:

18V LITHIUM-ION

BL MOTOR AVT XPT

Excellent performance as AC power scraper

1 High Power and High efficiency

BL motor delivers high power equivalent to AC models.

Impact Energy

3.1 J

EPTA-Procedure 05/2009:

2 Vibration absorbing housing

The housing construction reduces vibration of the rear handle and the barrel portion.



Vibration Level

4.5 m/s²

More controlled, easier scraping

achieved by moderating the increase in impact power during rise time.

Adapted for SDS-PLUS bits

Twin LED job light

with preglow and afterglow functions.

XPT

Extreme Protection Technology

12 bit angle settings

Adjustable chisel angle allows for easy operation in various applications.

Slide lever for trigger lock-on/ lock-off

- For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
- For lock-off of the trigger, push the slide lever without pulling the trigger.

Variable speed control by trigger

Variable speed control by dial

enables to adjust scraping power to the material of subfloor/subwall.

Accessories

Hook set

Part No. 191C37-7

Chisels

2019 ACCSSORY CATALOGUE

http://www.makita.biz/product/ecatalog_acc_2019/index_h5.html#54

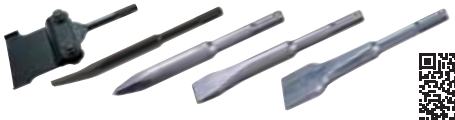

Cordless Power Scraper	DHK180 Adapted for SDS-PLUS bits
Variable Speed	
SDS-PLUS Shank	
Constant Speed	
Built-in Job Light	
Carrying Case	

Impact Energy	*EPTA-Procedure 05/2009: 3.1 J*
Blows Per Minute (BPM)	*0 - 3,200*
Vibration Level	*Chiselling: 4.5 m/s²*
Sound Pressure Level	*83 dB(A)*
Sound Power Level	*94 dB(A)*
Dimensions	*368x99x211 mm*
(L x W x H)	*(14-1/2"x3-7/8"x8-5/16")*
Net weight	*3.3 - 3.6 kg (7.3 - 7.9 lbs.)*

Standard Equipment : Bull Point, Cold Chisel (country-specific), Scaling chisel (for tile), Hook, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG

MakitaSG

VISIT OUR WEBSITE

DOWNLOAD LEAFLET

PRINTED IN SINGAPORE